
















**APPLICATION AND DATA SHEETS**

CMW Copper Base Alloys ..... 4  
 ELKONITE®, ELKON®, ANVILOY® Materials ..... 5  
 Metric Conversions Inches to Millimeters ..... 6  
 Taper Dimensions ..... 7  
 CMW and RWMA Straight Electrode Coding ..... 7  
 Holder and Electrode Application Sketches ..... 38  
 Multispot Pressure Equalizing Holder Setups ..... 60  
 Welding Bar and Rod Stock ..... 68  
 ELKONITE® Bar Stock ..... 69  
 GCAP® Weld and Stepper Schedule ..... 71  
 Spot Welding Schedules for Low Carbon Steel ..... 72  
 Projection Welding Schedules for Low Carbon Steel ..... 73  
 Welding Schedules for Stainless Steel ..... 74  
 Welding Schedules for Galvanized Low Carbon Steel ..... 75  
 Recommended Electrode Materials ..... 76  
 Resistance Welding Electrode Maintenance ..... 77  
 Welding Electrode Evaluation Form ..... 78  
 Do's and Don'ts for Resistance Welding Electrodes ..... 79  
 Sketches & Notes ..... 80




**CAP ELECTRODES GCAPS® AND SHANKS**

  Cap Electrodes ..... 8, 9, 10, 11  
  GCAP® Electrodes ..... 9  
  Cap Shanks ..... 12, 13

**STRAIGHT ELECTRODES**

  Dome and Pointed Nose ..... 14  
  Flat and Offset Nose ..... 15  
  Radius, Truncated, and 30° Nose ..... 16  
 Elkon® and Elkonite® Faced Nose ..... 16




**BENT ELECTRODES**

  Single and Radius Bend ..... 17  
 Double Bend ..... 18






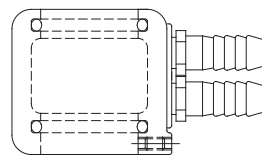
**THREADED ELECTRODES**

  ..... 30




**IRREGULAR ELECTRODES**

 Crank ..... 19, 20  
 Spade ..... 21  
 Gun ..... 22

**STUD AND NUT ELECTRODES**

 Chameleon/Max-Life™ Nut Electrodes ..... 23  
 Chameleon/Max-Life™ Stud Electrodes ..... 24  
 Self-Piloting Nut Electrodes ..... 25  
 Non-Piloting Nut Electrodes ..... 26  
 Stud or Pin Electrodes ..... 28  
 Cooling Jackets for Stud and Nut Electrodes ..... 27

**BACK-UP ELECTRODES**

 Swivel Head ..... 29  
 Large Round Head CMW®3 and ELKONITE® Faced ..... 29  
 Square and Rectangular Head ..... 29

**THREADED SOCKET (OR BUTTON) ELECTRODES MALE THREADED BUTTON ELECTRODES**




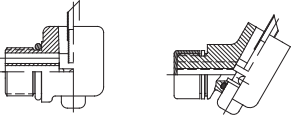
 ..... 50

**"NU-TWIST"® ELECTRODES**






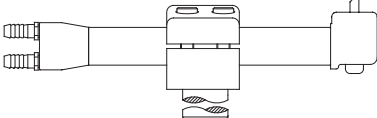


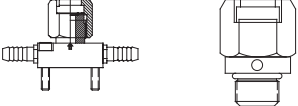
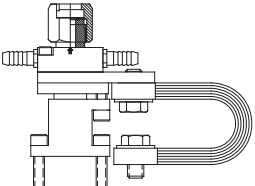
 ..... 50




**HOLDER TO ELECTRODE ADAPTERS**


	Non Ejector ..... 31
	Ejector ..... 34
	Assembly Examples ..... 32, 34, 36, 43
	Universal ..... 46

**ELECTRODE HOLDERS**


	100 Series Straight Non Ejector ..... 32, 33
	200 Series Straight Ejector ..... 34, 35
	300 Series Premium Straight Ejector ..... 36, 37
	400 Series Light Non-Ejector Offset ..... 39, 40
	500 Series Heavy Duty Ejector Offset ..... 41, 42, 43
	600 Series Universal Holder ..... 44
	600 Series Universal Holder Components ..... 45
	Platen Mounted Holders ..... 61
	800 Series "Nu-Twist"® Surface and Threaded Adapters .. 48, 49
	Hydraulic Equalizing Adapters for 800 Series .... 52, 53, 54, 55



Dual Mounted Hydraulic "Nu-Twist"® Assemblies ..... 56, 57




900 Series Light Universal Holders for Socket Electrodes ..... 51




950 Series Paddle Holders for Socket Electrodes ..... 51

**LOW INERTIA HOLDERS**

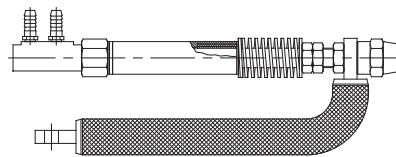


1100 Series Adjust-A-Pressure Low Inertia Holders .... 58, 59



1150 Series Adjust-A-Pressure Adapters ..... 58

**MULTISPOT ADAPTERS FOR AIR OR HYDRAULIC PISTONS**



1200 Series Multi-Spot Adapters ..... 62

**CONTACTORS**



Welder Contactors ..... 63


**ACCESSORIES**



Cap Electrode Extractor Fork ..... 65




Reamers, Hose Connectors, and Hose Clamps ..... 64



Pneumatic Electrode Dresser and Cutters ..... 66



Hand Electrode Dresser ..... 67



Force Gauge ..... 70



Long electrode life is of paramount importance to the user of resistance welding equipment. Selection of the proper CMW alloy or combination of alloys will help to give improved weld strength and electrode life.

CMW electrodes are fabricated from alloys selected from the results of laboratory and practical field tests. For special problems, CMW engineers will make recommendations based on their years of experience.

**Typical Physical and Mechanical Properties of CMW® Copper Based Alloys**

CMW ALLOY	Condition	Principal Elements	Class #	R.W.M.A. Alloy Number	Hardness Rockwell	Electrical Conductivity %I.A.C.S.	Ultimate Tensile Strength, psi	Elongation % in 2"	Permanent Softening Begins at	
									°C	°F
CMW® 28	Wrought**	Copper, Zirconium	1	1.15000	70 B	90	66,000	10	500	930
CMW® 3	Cast Wrought***	Copper, Chromium	2	2.18200	70 B	80	50,000	20	500	930
					83 B	85	75,000	15	500	930
CMW® 328	Wrought***	Copper, Chromium, Zirconium	2	2.18150	83 B	85	75,000	15	500	930
CMW® 353	Wrought Cast	Copper, Nickel, Silicon, Chromium	3	3.18000	94 B	48	100,000	13	455	850
					90 B	48	85,000	10	455	850
CMW® 100	Wrought	Copper, Nickel, Beryllium	3	3.17510	100 B	48	110,000	10	455	850
CMW® 73	Cast Wrought	Copper, Beryllium	4	4.17200	38 C	20	110,000	2	375	710
					38 C	23	170,000	4	375	710
ELKALOY® D	Cast	Copper, Aluminum	5	5.95300	92 B	13	85,000	15	620	1150
Copper	Cast Wrought	Pure Copper		—	30 B	95	25,000	50	200	390
					40 B	100	40,000	35	200	390
ELKALOY®20	Wrought	Copper, Al <sub>2</sub> O <sub>3</sub>	20	—	75 B	85	54,000	25	800	1475

Note: All properties shown are TYPICAL and should not be used for specifications

\*\* Cold drawn bars up to 5/8" diameter

\*\*\* Heat treated and cold drawn bars up to 1" diameter

**TYPICAL USAGE**

**CMW® 28** material is recommended for spot welding of coated steels and high conductivity materials, excluding copper and silver.

**CMW® 3** material is recommended for spot and seam welding cold and hot-rolled steels and coated materials as well as current carrying shafts and arms, back-up bars for both resistance and arc welding and electrical current carrying structural parts and springs.

**CMW® 328** material is recommended for spot and seam welding cold and hot rolled steels. There is some evidence that CMW® 328 outperforms CMW® 3 material when welding coated or galvanized steels.

**CMW® 353** material is recommended for heavy duty offset holders, back-up bars, flash welding dies, current carrying structural members, shafts and bushings in combination with CMW® 3.

**CMW® 100** material is recommended for spot and seam welding stainless steel and high temperature heat resisting alloys requiring high weld forces, flash welding dies, back-up bars, projection welding electrodes, and high strength, high conductivity electrical components and springs.

**CMW® 73** material is recommended for flash welding dies, springs, electrical components, high strength backing material for brazed assemblies and wire guides.

**ELKALOY® D** material is recommended for butt and flash welding dies and clamps for cold rolled and stainless steel, current carrying structural parts, jigs and fixtures, pickling racks and baskets.

**ELKALOY® 20** material has exceptional resistance to deformation when welding, and is highly recommended for welding caps for welding coated and galvanized steels. It allows a stable start-up, and generally outlasts other cap materials when welding parameters are not carefully controlled. The material requires upset cold work to develop its properties, and is therefore only available as caps or cap blanks.





ELKONITE® is the registered trade mark of CMW used to identify a group of metal compositions whose elements consist basically of the refractory metals tungsten, molybdenum and tungsten carbide combined with copper. Combinations of these elements produce dense, hard metals of superior wear resistance and strength at elevated temperatures, coupled with good thermal and electrical conductivity. The mechanical and physical properties of the ELKONITE® materials make them particularly suitable as the die inserts and facings for volume projection welding,

flash and butt welding, electrical upsetting, electroforging and mash welding applications.

ELKONITE® material is also used successfully as facing on spot welding electrodes where heat balance or mechanical wear resistance are required. The initial premium cost of ELKONITE® material is offset by lower production cost per weld due to long die life and less electrode dressing time. The high stability of ELKONITE® material insures uniform heating and prevents misalignment, resulting in a higher quality weld.

### Typical Physical and Mechanical Properties of CMW® Refractory Based Materials

CMW GRADE	Type of Material	Class #	R.W.M.A. Group B Material	Hardness Rockwell	Electrical Conductivity %I.A.C.S.	Ultimate Tensile Strength, psi	Cross Breaking Strength psi
ELKONITE® 1W3	Tungsten-Copper	10	10.74450	77 B	53	63,000	110,000
ELKONITE® 3W3	Tungsten-Copper		—	90 B	50	75,000	130,000
ELKONITE® 5W3	Tungsten-Copper		—	95 B	48	85,000	140,000
ELKONITE® 10W3	Tungsten-Copper	11	11.74400	98 B	45	90,000	150,000
ELKONITE® 30W3	Tungsten-Copper	12	12.74350	103 B	41	98,000	170,000
ELKONITE® 3W53	Tungsten-Copper Alloy		—	105 B	30	120,000	180,000
ELKONITE® 10W53*	Tungsten-Copper Alloy		—	109 B	28	160,000	200,000
ELKONITE® TC5	Tungsten Carbide-Copper		—	94 B	45	70,000	140,000
ELKONITE® TC10	Tungsten Carbide-Copper		—	100 B	42	75,000	160,000
ELKONITE® TC20	Tungsten Carbide-Copper		—	37 C	30	85,000	180,000
ELKONITE® TC53*	Tungsten Carbide-Copper Alloy		—	47 C	18	150,000	220,000
ELKON® 100W	Tungsten	13	13.74300	39 C	30	150,000	200,000
ELKON® 100M	Molybdenum	14	14.42300	90 B	30	80,000	120,000
ANVILOY® 1150**	Tungsten-Nickel-Iron-Molybdenum		—	34 C	13	140,000	280,000

Note: All properties shown are TYPICAL and should not be used for specifications

\* Properties are in fully heat treated condition

\*\* Hardness is 56 HRA at 1475 °F (800°C)

## TYPICAL USES

**ELKONITE® 1W3** and **3W3** alloys are generally used for flash and butt welding die inserts where higher electrical and thermal conductivity is necessary and where a degree of malleability is desirable. These materials are also used for spot welding (as a radius faced electrode) low conductivity ferrous metals such as stainless steel.

**ELKONITE® 5W3** and **TC5** alloys are normally used for light duty projection welding dies where welding pressures are not extreme.

**ELKONITE® 10W3** alloy is used for electrode and die inserts in most flash and butt welding dies and for projection welding dies where welding pressures are moderate. It is also used for light electrical upsetting, electroforging dies and seam welder bushing inserts.

**ELKONITE® 30W3** and **TC10** alloys are recommended for volume projection welding dies where the pressures involved are relatively high. Electrical upsetting of non-ferrous metals and low carbon steel is usually accomplished by the use of such ELKONITE® materials as die facings. Cross-wire welding of large, diameter wire and rod is accomplished with such ELKONITE® materials.

**ELKONITE® 3W53** and **10W53** are heat treatable grades of ELKONITE® materials supplied in the fully heat treated condition. If silver brazed to a die backing, such ELKONITE® materials should be heat treated after brazing. These harder grades are used primarily for electroforging and electrical upsetting dies, where temperatures and pressures are comparatively high.

**ELKONITE® TC20** and **TC53** materials are extremely hard and wear resistant. ELKONITE® TC20 material, while somewhat difficult to machine, may be machined using carbide tipped tools. ELKONITE® TC53 material is a heat treatable grade of such high hardness that machining operations are impractical and the material must be ground. Such ELKONITE® materials are customarily used for special applications of electrical upsetting and electroforging.

**ELKON® 100W** is extremely hard and its ductility is relatively low. It cannot be machined but may be ground to the required shape. It does not alloy appreciably with nonferrous materials and is used for cross-wire welding of metals such as copper and brass. It is also used for electro brazing electrode material and for some electrical upsetting operations.

**ELKON® 100M** is used principally for electro brazing electrode material and for cross-wire welding of nonferrous metals. It is not as hard as ELKON® 100W material and may be machined or drilled to fit the parts to be joined. A typical application of this material, as an electrode, is the welding or brazing of braided or solid copper conductors to ferrous or nonferrous terminals, lugs or fittings.

**ANVILOY® 1150** material is used in electro brazing applications where heat balance is important. The ANVILOY® 1150 material also has good anti-sticking qualities and good high temperature abrasion and hardness properties. The oxidation resistance of both materials is excellent up to 1100°F.





To convert from inches to metric we are including the three tables below to allow conversion from inches into millimeters.

Examples:

From Table I      **Convert 0.588 inches into millimeters**  
 0.580 inches = 14.73 millimeters  
 From Table I      0.008 inches = 0.203 millimeters  
 Total                0.588 inches = 14.933 millimeters

From Table II     **Convert 3.065 inches into millimeters**  
 3                    inches = 76.2002 millimeters  
 From Table I      0.060 inches = 1.524 millimeters  
 From Table I      0.005 inches = 0.127 millimeters  
 Total                3.065 inches = 77.8512 millimeters

From Table II     **Convert 2-51/64 inches into millimeters**  
 2-25/32 inches = 70.6439 millimeters  
 From Table II     1/64 inches = 0.3969 millimeters  
 Total                2-51/64 inches = 71.0408 millimeters

**TABLE I**  
**Decimals of an inch into millimeters**

Inches	Millimeters	Inches	Millimeters
0.001	0.025	0.460	11.68
0.002	0.051	0.470	11.94
0.003	0.076	0.480	12.19
0.004	0.102	0.490	12.45
0.005	0.127	0.500	12.70
0.006	0.152	0.510	12.95
0.007	0.178	0.520	13.21
0.008	0.203	0.530	13.26
0.009	0.229	0.540	13.72
0.010	0.254	0.550	13.97
0.020	0.508	0.560	14.22
		0.570	14.48
0.030	0.762	0.580	14.73
0.040	1.016	0.590	14.99
0.050	1.270	0.600	15.24
0.060	1.524	0.610	15.49
0.070	1.778	0.620	15.75
0.080	2.032	0.630	16.00
0.090	2.286	0.640	16.26
0.100	2.540	0.650	16.51
0.110	2.794	0.660	16.76
0.120	3.048	0.670	17.02
0.130	3.302	0.680	17.27
0.140	3.556	0.690	17.53
0.150	3.81	0.700	17.78
0.160	4.06	0.710	18.03
0.170	4.32	0.720	18.29
0.180	4.57	0.730	18.54
0.190	4.83	0.740	18.80
0.200	5.08	0.750	19.05
0.210	5.33	0.760	19.30
0.220	5.59	0.770	19.56
0.230	5.84	0.780	19.81
0.240	6.10	0.790	20.07
0.250	6.35	0.800	20.32
0.260	6.60	0.810	20.57
0.270	6.86	0.820	20.83
0.280	7.11	0.830	21.08
0.290	7.37	0.840	21.34
0.300	7.62	0.850	21.59
0.310	7.87	0.860	21.84
0.320	8.13	0.870	22.10
0.330	8.38	0.880	22.35
0.340	8.64	0.890	22.61
0.350	8.89	0.900	22.86
0.360	9.14	0.910	23.11
0.370	9.40	0.920	23.37
0.380	9.65	0.930	23.62
0.390	9.91	0.940	23.88
0.400	10.16	0.950	24.13
0.410	10.41	0.960	24.38
0.420	10.67	0.970	24.64
0.430	10.92	0.980	24.89
0.440	11.18	0.990	25.15
0.450	11.43	1.000	25.40

**TABLE II**  
**Fractions of an inch into millimeters**

Inches	Millimeters	Inches	Millimeters
1/64	0.3969	33/64	13.0969
1/32	0.7937	17/32	13.4937
3/64	1.1906	35/64	13.8906
1/16	1.5875	9/16	14.2875
5/64	1.9844	37/64	14.6844
3/32	2.3812	19/32	15.0812
7/64	2.7781	39/64	15.4781
1/8	3.1750	5/8	15.8750
9/64	3.5719	41/64	16.2719
5/32	3.9687	21/32	16.6687
11/64	4.3656	43/64	17.0656
3/16	4.7625	11/16	17.4625
13/64	5.1594	45/64	17.8594
7/32	5.5562	23/32	18.2562
15/64	5.9531	47/64	18.6531
1/4	6.3500	3/4	19.0500
17/64	6.7469	49/64	19.4469
9/32	7.1437	25/32	19.8437
19/64	7.5406	51/64	20.2406
5/16	7.9375	13/16	20.6375
21/64	8.3344	53/64	21.0344
11/32	8.7312	27/32	21.4312
23/64	9.1281	55/64	21.8281
3/8	9.5250	7/8	22.2250
25/64	9.9219	57/64	22.6219
13/32	10.3187	29/32	23.0187
27/64	10.7156	59/64	23.4156
7/16	11.1125	15/16	23.8125
29/64	11.5094	61/64	24.2094
15/32	11.9062	31/32	24.6062
31/64	12.3031	63/64	25.0031
1/2	12.7000	1	25.4001


**TABLE III**  
**Gage-Decimal-Millimeter Conversion Chart**

Gage	Decimal	Millimeter
3	.239	6.350
4	.234	5.953
5	.209	5.556
6	.194	5.159
7	.179	4.762
8	.164	4.365
9	.150	3.968
10	.135	3.571
11	.120	3.175
12	.105	2.778
13	.090	2.381
14	.075	1.984
15	.067	1.778
16	.060	1.587
17	.054	1.422
18	.048	1.270
19	.042	1.118
20	.036	.965
21	.033	.865
22	.030	.793
23	.027	.711
24	.024	.635
25	.021	.559
26	.018	.483
27	.016	.432
28	.015	.396
29	.014	.356
30	.012	.330
31	.011	.279
32	.010	.254
33	.009	.229
34	.0082	.216
35	.008	.203
36	.007	.178
37	.0064	.168
38	.006	.152

For Taper Dimensions in inches & millimeters see Page 7.



**Standard Tapered Electrode Theoretical Dimensions**      **Taper Size**      **Standard Male Taper Cap taper Dimensions**

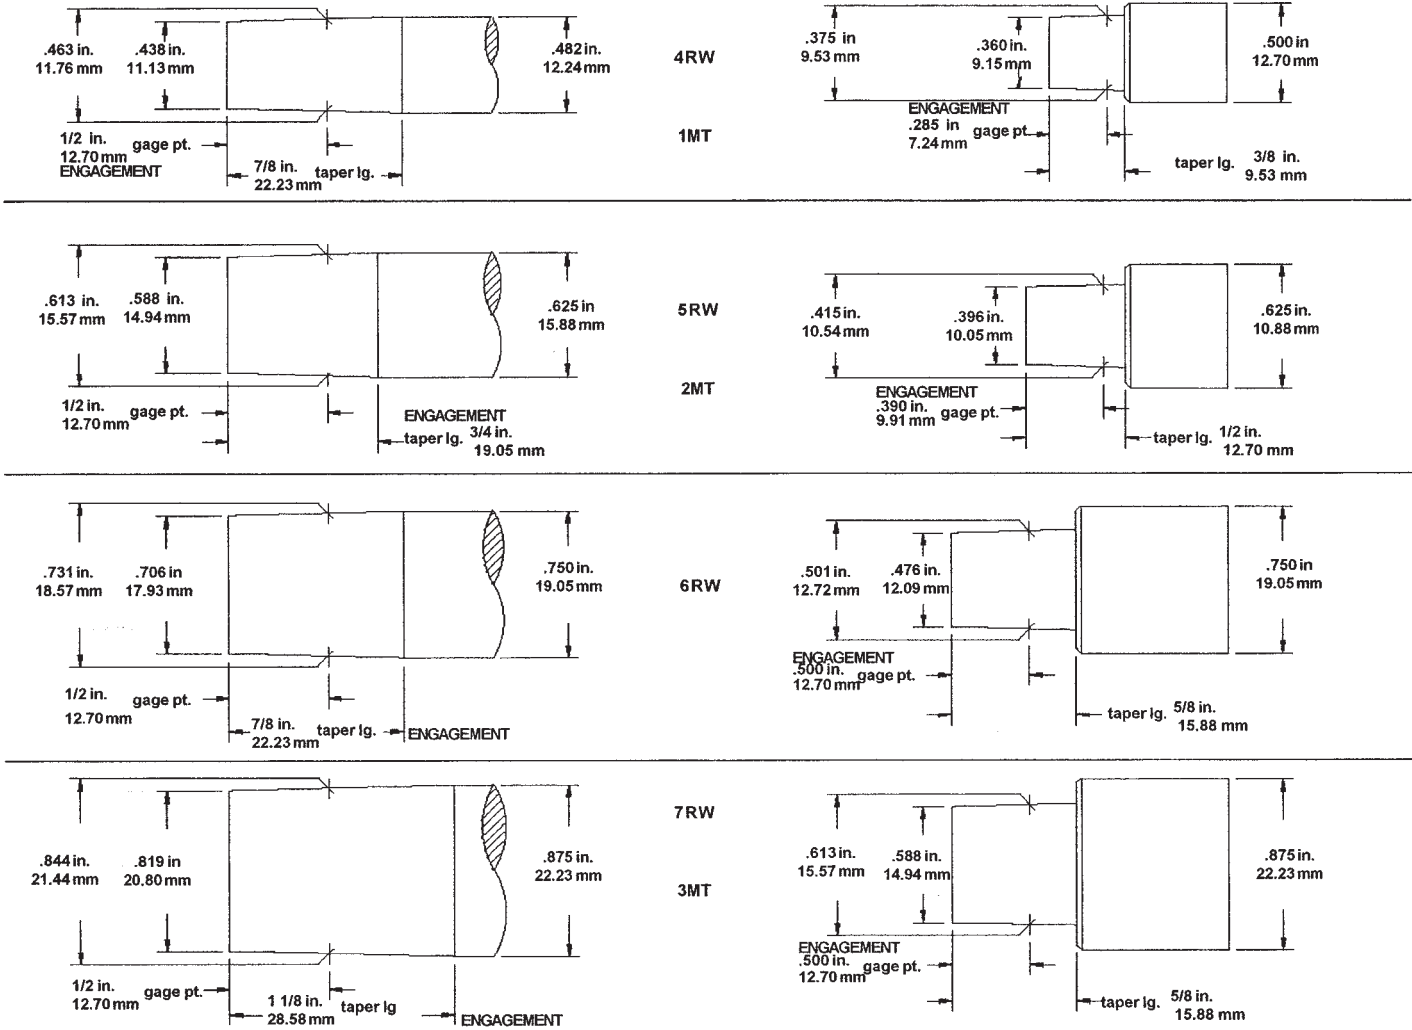

Drawings Full Size

**CMW CODING FOR STRAIGHT TAPERED ELECTRODES**

X X X X X

Material	Nose	Attachment	Length
1 = CMW <sup>®</sup> 28	1 = Dome	1 = No. 4RW	1 = 1"
	2 = Pointed	No. 1MT	2 = 1 1/4"
3 = CMW <sup>®</sup> 3	3 = Flat		3 = 1 1/2"
5 = CMW <sup>®</sup> 100	4 = Offset	2 = No. 5RW	4 = 1 3/4"
6 = ELKONITE <sup>®</sup> 10W3	5 = 2" Sph. R	No. 2MT	5 = 2"
7 = ELKONITE <sup>®</sup> TC5	6 = 10" Sph. R.		6 = 2 1/4"
8 = ELKON <sup>®</sup> 100M	7 = Truncated	3 = No. 7RW	7 = 2 1/2"
9 = ELKON <sup>®</sup> 100W	8 = 3" Sph. R	No. 3MT	8 = 2 3/4"
	9 = 4" Sph. R		9 = 3"
	0 = Shank for Male Cap	4 = No. 6RW	12 = 3 1/4"
			14 = 3 1/2"
			16 = 3 3/4"
			18 = 4"
			20 = 4 1/4"
			22 = 4 1/2"

Note: Prefix MP = Shank for Female Cap

**RWMA CODING FOR STRAIGHT TAPERED ELECTRODES**

X X X X X

Nose	Material	Attachment	Length in no. of 1/4"
A = Pointed	1 = RWMA CL 1 CMW <sup>®</sup> 28	4 = No. 4RW No. 1MT	04 = 1" 05 = 1 1/4" 06 = 1 1/2" 07 = 1 3/4"
B = Dome		5 = No. 5RW No. 2MT	08 = 2" 09 = 2 1/4" 10 = 2 1/2" 11 = 2 3/4"
C = Flat	2 = RWMA CL 2 CMW <sup>®</sup> 3	6 = No. 6RW	12 = 3" 13 = 3 1/4" 14 = 3 1/2" 15 = 3 3/4"
D = Offset	3 = RWMA CL 3 CMW <sup>®</sup> 100	7 = No. 7RW No. 3MT	16 = 4" 17 = 4 1/4" 18 = 4 1/2"
E = Truncated			




These economical, quick change caps are made of long-lasting, highly-efficient CMW®28, CMW®3, and CMW®328 copper alloys, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements for use on CMW shanks.

**CMW FEMALE CAP ELECTRODES**

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 12 for Shanks



	POINTED (A)	DOMES (B)	FLAT (C)	OFFSET (D)	TRUNCATED (E)	RADIUS (F)
Cap Taper RW #4 Diameter .500* Length .840*  CMW®28 CMW®3 CMW®328						
MPA14Z MPA24 MPA24Z	MPB14Z MPB24 MPB24Z	MPC14Z MPC24 MPC24Z	MPD14Z MPD24 MPD24Z	MPE14Z MPE24 MPE24Z	MPF14Z MPF24 MPF24Z	
Cap Taper RW #5 Diameter .625* Length .880*  CMW®28 CMW®3 CMW®328						
MPA15Z MPA25 MPA25Z	MPB15Z MPB25 MPB25Z	MPC15Z MPC25 MPC25Z	MPD15Z MPD25 MPD25Z	MPE15Z MPE25 MPE25Z	MPF15Z MPF25 MPF25Z	
Cap Taper RW #6 Diameter .750* Length 1.000*  CMW®28 CMW®3 CMW®328						
MPA16Z MPA26 MPA26Z	MPB16Z MPB26 MPB26Z	MPC16Z MPC26 MPC26Z	MPD16Z MPD26 MPD26Z	MPE16Z MPE26 MPE26Z	MPF16Z MPF26 MPF26Z	

**CMW MALE CAP ELECTRODES**

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 13 for Shanks



	POINTED (A)	DOMES (B)	FLAT (C)	OFFSET (D)	TRUNCATED (E)	RADIUS (F)
Cap Taper RW #4 Diameter .500* Length 1.125*  CMW®28 CMW®3 CMW®328						
MA14Z MA24 MA24Z	MB14Z MB24 MB24Z	MC14Z MC24 MC24Z	MD14Z MD24 MD24Z	ME14Z ME24 ME24Z	MF14Z MF24 MF24Z	
Cap Taper RW #5 Diameter .625* Length 1.250*  CMW®28 CMW®3 CMW®328						
MA15Z MA25 MA25Z	MB15Z MB25 MB25Z	MC15Z MC25 MC25Z	MD15Z MD25 MD25Z	ME15Z ME25 ME25Z	MF15Z MF25 MF25Z	
Cap Taper RW #6 Diameter .750* Length 1.625*  CMW®28 CMW®3 CMW®328						
MA16Z MA26 MA26Z	MB16Z MB26 MB26Z	MC16Z MC26 MC26Z	MD16Z MD26 MD26Z	ME16Z ME26 ME26Z	MF16Z MF26 MF26Z	





The CMW GCAP<sup>®</sup> electrode is the answer to welding galvanized steels. The GCAP's<sup>®</sup> revolutionary design, and precision manufacturing from CMW Engineering provides for no sticking from the very first weld. GCAP<sup>®</sup> electrode nuggets meet or exceed industry standards for high quality welds from the first weld through the life of the cap. This cap design made from R.W.M.A. class 2 material eliminates brass build-up by literally rolling the brass away. You will use

less electric power (up to 25% less) and still achieve superior welds due to GCAP<sup>®</sup> design. Productivity will increase with up to 10 times more welds without dressing.

For best use of CMW GCAP<sup>®</sup> a stepper program is recommended. Consult CMW application engineering.  
 U.S. Patent 49,954,687; 5,015,816; 5,126,528.  
 Other patents pending.

### CMW FEMALE GCAP<sup>®</sup> ELECTRODES

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 12 for Shanks  
 - See page 71 for suggested weld schedules



STRAIGHT



OFFSET




OFFSET 15°




OFFSET 30°

Cap Taper RW #4  
 Diameter .500\*  
 Length .840\*


CMW<sup>®</sup>3




MPG244



MPGD244




MPGD244-1501




MPGD244-3001

Cap Taper RW #5  
 Diameter .625\*  
 Length .880\*


CMW<sup>®</sup>3



MPG254



MPGD254




MPGD254-1501



MPGD254-3001

Cap Taper RW #5  
 Diameter .625\*  
 Length .880\*

CMW<sup>®</sup>3



MPG255



MPGD255




MPGD255-1501




MPGD255-3001

Cap Taper RW #6  
 Diameter .750\*  
 Length 1.000\*


CMW<sup>®</sup>3



MPG266



MPGD266



MPGD266-1501



MPGD266-3001

### CMW MALE GCAP<sup>®</sup> ELECTRODES

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 13 for Shanks  
 - See page 71 for suggested weld schedules



STRAIGHT



OFFSET




OFFSET 15°




OFFSET 30°

Cap Taper RW #4  
 Diameter .500\*  
 Length 1.125\*


CMW<sup>®</sup>3




MG244



MGD244




MGD244-1501




MGD244-3001

Cap Taper RW #5  
 Diameter .625\*  
 Length 1.250\*

CMW<sup>®</sup>3



MG254



MGD254




MGD254-1501




MGD254-3001

Cap Taper RW #5  
 Diameter .625\*  
 Length 1.250\*

CMW<sup>®</sup>3



MG255



MGD255




MGD255-1501




MGD255-3001

Cap Taper RW #6  
 Diameter .750\*  
 Length 1.625\*


CMW<sup>®</sup>3




MG266



MGD266



MGD266-1501



MGD266-3001



These economical, quick change caps are made of long lasting, highly efficient CMW<sup>®</sup>28, CMW<sup>®</sup>3, CMW<sup>®</sup>328 copper alloy, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements.

**CMW FEMALE ASIAN CAP ELECTRODES**

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.



ASIAN TYPE (D)



ASIAN TYPE (R)




ASIAN TYPE (F)




ASIAN TYPE (E)


Taper 1:9.6  
Dia. 13mm (.512)\*  
Length 20mm (.787)\*




MPB141Z-01  
MPB241-01  
MPB241Z-04



MPB141Z-02  
MPB241-02  
MPB241Z-07




MPC141Z-01  
MPC241-01  
MPC241Z-02




MPD141Z-01  
MPD241-02  
MPD241Z-02

CMW<sup>®</sup>28  
CMW<sup>®</sup>3  
CMW<sup>®</sup>328


Taper 1:9.6  
Dia. 16mm (.625)\*  
Length 23mm (.906)\*




MPB15Z-11  
MPB25-14  
MPB25Z-19



MPB15Z-12  
MPB25-18  
MPB25Z-20



MPC15Z-01  
MPC25-02  
MPC25Z-05



MPD15Z-03  
MPD25-05  
MPD25Z-04













CMW<sup>®</sup>28  
CMW<sup>®</sup>3  
CMW<sup>®</sup>328



These economical, quick change caps are made of long lasting, highly efficient CMW<sup>®</sup>328 copper alloy, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements.








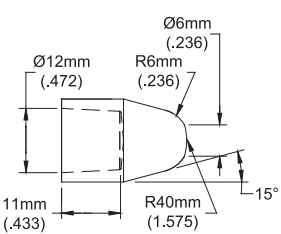
**CMW FEMALE METRIC-ISO 5821 CAP ELECTRODES**

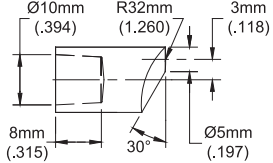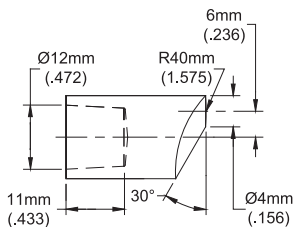ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	 METRIC TYPE (A)	 METRIC TYPE (B)	 METRIC TYPE (C)	 METRIC TYPE (D)
Taper 1:10 Dia. 13mm (.512)* Length 18mm (.709)*				
CMW <sup>®</sup> 328	MPF241Z-01	MPE241Z-01	MPC241Z-01	MPD241Z-01
Taper 1:10 Dia. 16mm (.625)* Length 20mm (.787)*				
CMW <sup>®</sup> 328	MPF25Z-01	MPE25Z-02	MPC25Z-02	MPD25Z-02

**CMW FEMALE METRIC-ISO 5821 CAP ELECTRODES**

ALL DIMENSIONS MARKED WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	 METRIC TYPE (E)	 METRIC TYPE (F)	 METRIC TYPE (G)
Taper 1:10 Dia. 13mm (.512)* Length 18mm (.709)*			No Standard Available
CMW <sup>®</sup> 328	MPA241Z-01	MPB241Z-01	
Taper 1:10 Dia. 16mm (.625)* Length 20mm (.787)*			
CMW <sup>®</sup> 328	MPA25Z-03	MPB25Z-03	MPA25Z-09





CMW shanks are precision manufactured from CMW®3 class 2 material to provide a high quality mount for cap type electrodes. They are designed for high strength and electrical conductivity.

\*These shanks are shown with a blind water hole for cap replacement without shutting off water. Shanks with through water holes are available, by adding "TH" to the basic part number. Example: MP30212TH.


**SHANKS FOR FEMALE CAP ELECTRODES**

- See pages 8 & 9 for CMW standard nose and GCAP® electrode caps




**SHANKS FOR FEMALE CAPS WITH #4 RW TAPERS**

Part No.	A	B
MP3012	1.25	1.75
MP3013	1.50	2.00
MP3014	1.75	2.25
MP3015	2.00	2.50
MP3016	2.25	2.75
MP3017	2.50	3.00
MP3018	2.75	3.25
MP3019	3.00	3.50
MP30112	3.25	3.75
MP30114	3.50	4.00
MP30116	3.75	4.25
MP30118	4.00	4.50



**BENT OFFSET SHANKS FOR FEMALE CAPS WITH #4 RW TAPERS**

Part No.	A	B	C
MP3019-08	2.62	3.28	0.50
MP3019-12	2.56	3.22	0.75
MP30112-12	2.81	3.47	0.75
MP30112-16	2.37	3.03	1.00
MP30116-16	2.87	3.53	1.00
MP30116-20	2.60	3.28	1.25




Bent Dimensions for Reference Only




**SHANKS FOR FEMALE CAPS WITH #5 RW TAPERS**

Part No.	A	B
MP3023	1.46	2.00
MP3024	1.71	2.25
MP3025	1.96	2.50
MP3026	2.21	2.75
MP3027	2.46	3.00
MP3028	2.71	3.25
MP3029	2.96	3.50
MP30212	3.21	3.75
MP30214	3.46	4.00
MP30216	3.71	4.25
MP30218	3.96	4.50
MP30220	4.21	4.75
MP30222	4.46	5.00

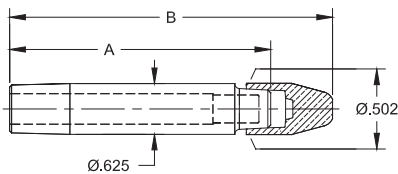

**BENT OFFSET SHANKS FOR FEMALE CAPS WITH #5 RW TAPERS**

Part No.	A	B	C
MP3029-08	2.58	3.20	0.50
MP3029-12	2.60	3.12	0.75
MP30212-12	2.77	3.44	0.75
MP30212-16	2.33	3.00	1.00
MP30214-12	3.00	3.66	0.75
MP30214-16	2.81	3.48	1.00
MP30216-16	2.83	3.49	1.00
MP30216-20	2.77	3.43	1.25

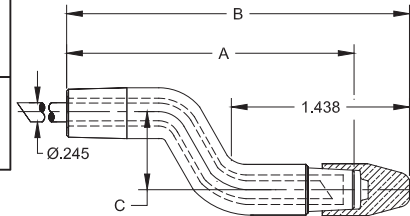


Bent Dimensions for Reference Only




**SHANKS FOR FEMALE CAPS WITH #6 RW TAPERS**

Part No.	A	B
MP3044	1.64	2.25
MP3045	1.89	2.50
MP3046	2.14	2.75
MP3047	2.39	3.00
MP3048	2.64	3.25
MP3049	2.89	3.50
MP30412	3.14	3.75
MP30414	3.39	4.00
MP30416	3.64	4.25
MP30418	3.89	4.50
MP30420	4.14	4.75
MP30422	4.39	5.00

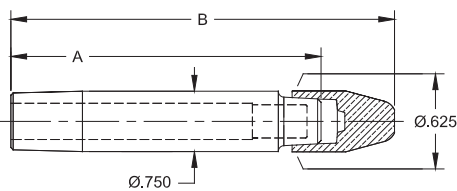

**BENT OFFSET SHANKS FOR FEMALE CAPS WITH #6 RW TAPERS**

Part No.	A	B	C
MP3049-08	2.69	3.30	0.50
MP30412-12	2.81	3.42	0.75
MP30414-12	2.94	3.55	0.75
MP30416-16	3.06	3.67	1.00
MP30420-20	3.25	3.86	1.25

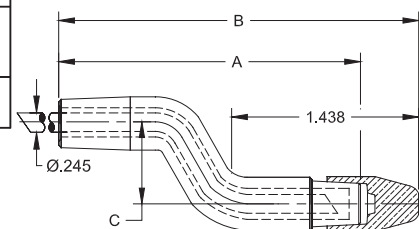

Bent Dimensions for Reference Only



CMW shanks are precision manufactured from CMW®3 class 2 material to provide a high quality mount for cap type electrodes. They are designed for high strength and electrical conductivity.


**SHANKS FOR MALE CAP ELECTRODES**

- See pages 8 & 9 for CMW standard nose and GCAP® electrode caps




SHANKS FOR MALE CAPS WITH #4 RW TAPERS

Part No.	A	B
3012	1.25	1.88
3013	1.50	2.12
3014	1.75	2.38
3015	2.00	2.62
3016	2.25	2.88
3017	2.50	3.12
3018	2.75	3.38
3019	3.00	3.62
30112	3.25	3.88
30114	3.50	4.12
30116	3.75	4.38
30118	4.00	4.62

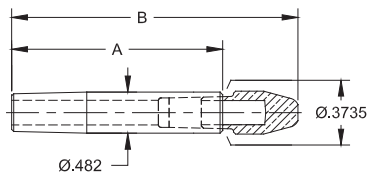

BENT OFFSET SHANKS FOR MALE CAPS WITH #4 RW TAPERS

Part No.	A	B	C
3019-08	2.62	3.37	0.50
3019-12	2.56	3.31	0.75
30112-12	2.81	3.56	0.75
30112-16	2.37	3.12	1.00
30116-16	2.87	3.62	1.00
30116-20	2.62	3.37	1.25




Bent Dimensions for Reference Only




SHANKS FOR MALE CAPS WITH #5 RW TAPERS

Part No.	A	B
3022	1.25	2.00
3023	1.50	2.25
3024	1.75	2.50
3025	2.00	2.75
3026	2.25	3.00
3027	2.50	3.25
3028	2.75	3.50
3029	3.00	3.75
30212	3.25	4.00
30214	3.50	4.25
30216	3.75	4.50
30218	4.00	4.75
30220	4.25	5.00
30222	4.50	5.25

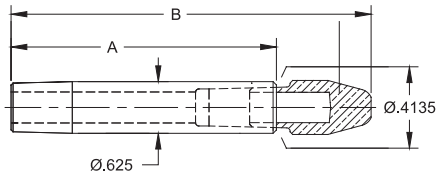

BENT OFFSET SHANKS FOR MALE CAPS WITH #5 RW TAPERS

Part No.	A	B	C
3028-08	2.37	3.12	0.50
3028-12	2.31	3.06	0.75
30212-12	2.81	3.56	0.75
30212-16	2.37	3.12	1.00
30214-12	3.06	3.81	0.75
30214-16	2.62	3.37	1.00
30214-20	2.37	3.12	1.25
30216-16	2.87	3.62	1.00
30216-20	2.62	3.37	1.25

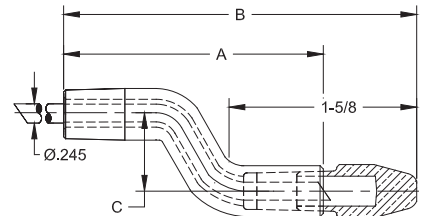


Bent Dimensions for Reference Only




SHANKS FOR MALE CAPS WITH #6 RW TAPERS

Part No.	A	B
3043	1.50	2.62
3044	1.75	2.88
3045	2.00	3.12
3046	2.25	3.38
3047	2.50	3.62
3048	2.75	3.88
3049	3.00	4.12
30412	3.25	4.38
30414	3.50	4.62
30416	3.75	4.88
30418	4.00	5.12
30420	4.25	5.38
30422	4.50	5.62

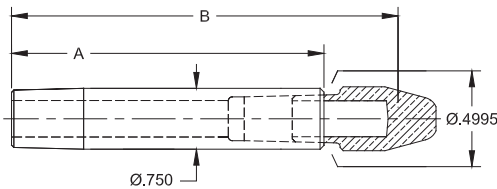

BENT OFFSET SHANKS FOR MALE CAPS WITH #6 RW TAPERS

Part No.	A	B	C
30412-08	2.62	3.75	0.50
30412-12	2.56	3.69	0.75
30414-12	2.75	3.88	0.75
30416-16	2.87	4.00	1.00
30420-20	3.12	4.25	1.25

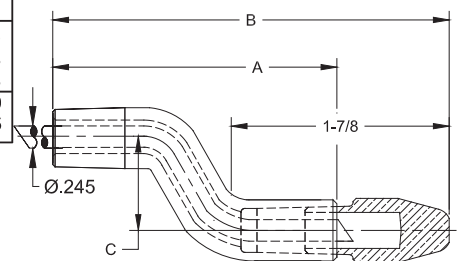


Bent Dimensions for Reference Only




## STRAIGHT ELECTRODES



DOME NOSE (B)

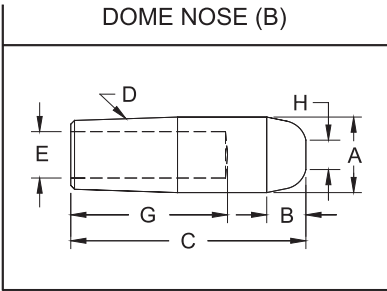

POINTED NOSE (A)

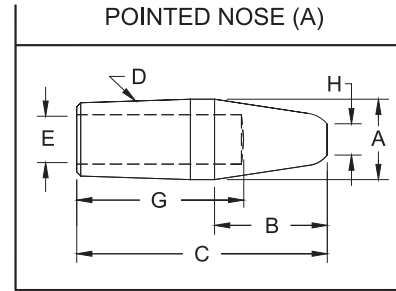

4 RW TAPER (D)			
CMW <sup>®</sup> 28	CMW <sup>®</sup> 3	CMW <sup>®</sup> 100	Nose Length B
Class 1	Class 2	Class 3	
1111	3111	5111	13/64
1112	3112	5112	1/4
1113	3113	5113	1/4
1114	3114	5114	1/4
1115	3115	5115	
1116	3116	5116	
1117	3117	5117	1/4
1118	3118	5118	
1119	3119	5119	
11112	31112	51112	1/4
11114	31114	51114	
11116	31116	51116	
11118	31118	51118	

COMMON DIMENSIONS				
Face Dia. H	Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
3/16	.482	9/32	1	5/8
			1-1/4	3/4
			1-1/2	1
			1-3/4	1-1/4
			2	1-1/2
			2-1/4	1-3/4
			2-1/2	2
			2-3/4	2-1/4
			3	2-1/2
			3-1/4	2-3/4
			3-1/2	3
			3-3/4	3-1/4
4	3-1/2			

4 RW TAPER (D)			
CMW <sup>®</sup> 28	CMW <sup>®</sup> 3	CMW <sup>®</sup> 100	Nose Length B
Class 1	Class 2	Class 3	
1211	3211	5211	3/8
1212	3212	5212	3/8
1213	3213	5213	5/8
1214	3214	5214	3/4
1215	3215	5215	
1216	3216	5216	
1217	3217	5217	3/4
1218	3218	5218	
1219	3219	5219	
12112	32112	52112	3/4
12114	32114	52114	
12116	32116	52116	
12118	32118	52118	

5 RW TAPER (D)			
CMW <sup>®</sup> 28	CMW <sup>®</sup> 3	CMW <sup>®</sup> 100	Nose Length B
Class 1	Class 2	Class 3	
1122	3122	5122	3/8
1123	3123	5123	
1124	3124	5124	
1125	3125	5125	
1126	3126	5126	
1127	3127	5127	
1128	3128	5128	
1129	3129	5129	
11212	31212	51212	
11214	31214	51214	
11216	31216	51216	
11218	31218	51218	
11220	31220	51220	1-1/8
11222	31222	51222	

COMMON DIMENSIONS				
Face Dia. H	Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
1/4	.625	3/8	1-1/4	3/4
			1-1/2	3/4
			1-3/4	1
			2	1-1/4
			2-1/4	1-1/2
			2-1/2	1-3/4
			2-3/4	2
			3	2-1/4
			3-1/4	2-1/2
			3-1/2	2-3/4
			3-3/4	3
			4	3-1/4
4-1/4	3-1/2			
4-1/2	3-3/4			



5 RW TAPER (D)			
CMW <sup>®</sup> 28	CMW <sup>®</sup> 3	CMW <sup>®</sup> 100	Nose Length B
Class 1	Class 2	Class 3	
1222	3222	5222	1/2
1223	3223	5223	3/4
1224	3224	5224	3/4
1225	3225	5225	1-1/8
1226	3226	5226	
1227	3227	5227	
1228	3228	5228	1-1/8
1229	3229	5229	
12212	32212	52212	
12214	32214	52214	1-1/8
12216	32216	52216	
12218	32218	52218	
12220	32220	52220	
12222	32222	52222	1-1/8

\*Electrodes of other tapers and alloys available upon request.





## STRAIGHT ELECTRODES

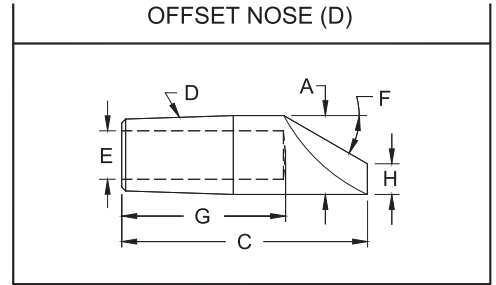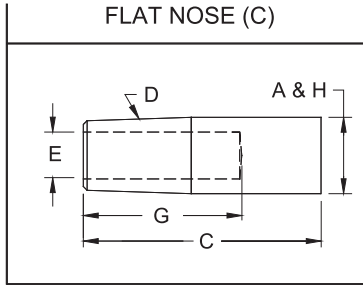

4 RW TAPER (D)			
CMW® 28	CMW® 3	CMW® 100	Face Dia. H
Class 1	Class 2	Class 3	
1311	3311	5311	.482
1312	3312	5312	
1313	3313	5313	
1314	3314	5314	
1315	3315	5315	
1316	3316	5316	
1317	3317	5317	
1318	3318	5318	
1319	3319	5319	
13112	33112	53112	
13114	33114	53114	
13116	33116	53116	
13118	33118	53118	

COMMON DIMENSIONS			
Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
.482	9/32	1	5/8
		1-1/4	3/4
		1-1/2	1
		1-3/4	1-1/4
		2	1-1/2
		2-1/4	1-3/4
		2-1/2	2
		2-3/4	2-1/4
		3	2-1/2
		3-1/4	2-3/4
		3-1/2	3
		3-3/4	3-1/4
		4	3-1/2

4 RW TAPER (D)				
CMW® 28	CMW® 3	CMW® 100	Nose Angle F	Face Dia. H
Class 1	Class 2	Class 3		
1411	3411	5411	45°	3/16
1412	3412	5412	40°	
1413	3413	5413	30°	
1414	3414	5414	30°	
1415	3415	5415		
1416	3416	5416		
1417	3417	5417	30°	
1418	3418	5418		
1419	3419	5419		
14112	34112	54112	30°	
14114	34114	54114		
14116	34116	54116		
14118	34118	54118		

5 RW TAPER (D)			
1322	3322	5322	5/8
1323	3323	5323	
1324	3324	5324	
1325	3325	5325	
1326	3326	5326	
1327	3327	5327	
1328	3328	5328	
1329	3329	5329	
13212	33212	53212	
13214	33214	53214	
13216	33216	53216	
13218	33218	53218	
13220	33220	53220	
13222	33222	53222	

COMMON DIMENSIONS			
Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
.625	3/8	1-1/4	3/4
		1-1/2	3/4
		1-3/4	1
		2	1-1/4
		2-1/4	1-1/2
		2-1/2	1-3/4
		2-3/4	2
		3	2-1/4
		3-1/4	2-1/2
		3-1/2	2-3/4
		3	3-3/4
		4	3-1/4
		4-1/4	3-1/2
		4-1/2	3-3/4


5 RW TAPER (D)				
1422	3422	5422	40°	1/4
1423	3423	5423	40°	
1424	3424	5424	30°	
1425	3425	5425	30°	
1426	3426	5426		
1427	3427	5427		
1428	3428	5428	30°	
1429	3429	5429		
14212	34212	54212		
14214	34214	54214	30°	
14216	34216	54216		
14218	34218	54218		
14220	34220	54220		
14222	34222	54222	30°	

\*Electrodes of other tapers and alloys available upon request.



**STRAIGHT ELECTRODES**


TRUNCATED (E)								
CMW® 28	CMW® 3	CMW® 100	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
Class 1	Class 2	Class 3						
1712	3712	5712	.482	1-1/4	4RW	3/4	3/16	9/32
1713	3713	5713		1-1/2		1		
1715	3715	5715		2		1-1/2		
1717	3717	5717		2-1/2		2		
1718	3718	5718		2-3/4		2-1/4		
1723	3723	5723	.625	1-1/2	5RW	3/4	1/4	3/8
1725	3725	5725		2		1-1/4		
1727	3727	5727		2-1/2		1-3/4		
1729	3729	5729		3		2-1/4		
17218	37218	57218		4		3-1/4		



TRUNCATED NOSE (E)




RADIUS (F)								
CMW® 28	CMW® 3	CMW® 100	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Spherical Radius R	Water Hole Dia. E
Class 1	Class 2	Class 3						
1523	3523	5523	.625	1-1/2	5RW	3/4	2	3/8
1525	3525	5525		2		1-1/4		
1527	3527	5527		2-1/2		1-3/4		
1529	3529	5529		3		2-1/4	10	
15218	35218	55218		4		3-1/4		
1623	3623	5623		1-1/2		3/4		
1625	3625	5625		2		1-1/4	3	
1627	3627	5627		2-1/2		1-3/4		
1629	3629	5629		3		2-1/4		
16218	36218	56218		4		3-1/4	4	
1825	3825	5825		2		1-1/4		
1829	3829	5829		3		2-1/4		
1925	3925	5925	2	1-1/4	4			
1929	3929	5929	3	2-1/4				



RADIUS NOSE (F)



30° OFFSET								
CMW® 28	CMW® 3	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E	
Class 1	Class 2							
16-2491	16-2494	.482	2	4RW	1-1/2	1/4	9/32	
16-2492	16-2495	.625	2-1/2	5RW	2	3/8	3/8	
16-2493	16-2496	.875	3	7RW	2-1/4	1/2	1/2	



30° OFFSET NOSE




- See page 6 for Metric conversions, & See page 7 for Taper dimensions

**ELKONITE® AND ELKON® FACED STRAIGHT ELECTRODES**

ELKONITE® AND ELKON® DOME NOSE									
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
611050	811050	911050	.482	3/16	2	4RW	1-1/2	1/8	9/32
612050	812050	912050	.625	1/4	2	5RW	1-1/2	1/8	3/8

DOME NOSE




DOME NOSE



ELKONITE® AND ELKON® FLAT NOSE											
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E		
631050	831050	931050	.482	3/16	2	4RW	1-1/2	.482	9/32		
632030	832050	932050	.625	1/4	2	5RW	1	5/8	3/8		
632050										2	1-1/2
632070										2	2-1/2
16-1353											
633050	833050	933050	.875	1/4	2	7RW	1-1/2	7/8	1/2		

FLAT NOSE




FLAT NOSE



ELKON® CENTERED INSERT NOSE									
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
871050	971050		.482	3/8	2	4RW	1-1/2	3/16	9/32
872050	972050		.625	3/8	2	5RW	1-1/4	1/4	3/8

INSERT NOSE



INSERT NOSE




- Electrodes of other tapers and alloys available upon request. For other ELKONITE® and ELKON® materials see page 5 and for other recommended uses see the chart on page 76. Electrodes faced with material other than those shown on this page are available to special order.



CMW<sup>®</sup>3 single bend electrodes are cold formed from full hard straight electrodes, and have properties superior to those obtained by casting or hot forging methods. Cooling tubes are bent in place, if requested, to provide water flow as near to the welding face as in the case of straight electrodes. These extra values assure you a more efficient, less costly electrode for gun welders and special offset welding applications.



Furnished with water tubes as specials to your order. Other nose types available to order. For dimensions not shown here see straight electrode (round water hole) measurements on page 14, 15, & 16. CMW<sup>®</sup>28 material available on special order.

### SINGLE BEND ELECTRODES

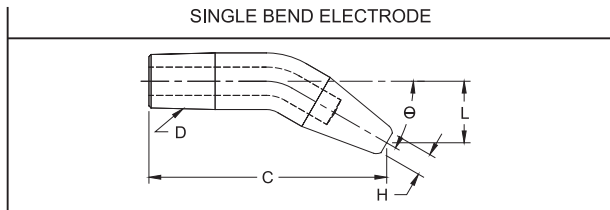

PART No.	Reference Length to $\phi$ of Face C	Taper D	Offset $\phi$ of Taper to $\phi$ of Face L	Bend Angle $\theta$	Bend Weld Face Dia. H
3214-04-15	1-11/16	4 RW	1/4	15°	3/16
3219-04-15	2-15/16		1/4		
32118-13-15	3-7/8		13/16		
3225-04-15	1-7/8	5 RW	1/4		1/4
3229-04-15	2-7/8		1/4		
32218-10-15	3-13/16		5/8		
3215-07-30	1-7/8	4 RW	7/16	30°	3/16
3219-07-30	2-7/8		7/16		
32118-23-30	3-5/8		1-7/16		
3226-09-30	2-1/16	5 RW	9/16		1/4
32212-09-30	3-1/16		9/16		
32220-24-30	3-13/16		1-1/2		
3215-10-45	1-11/16	4 RW	5/8	45°	3/16
32112-12-45	2-7/8		3/4		
32118-33-45	3-1/8		2-1/16		
3228-17-45	2-1/4	5 RW	1-1/16		1/4
32214-17-45	3		1-1/16		
32220-33-45	3-3/8		2-1/16		
3218-23-60	2	4 RW	1-7/16	60°	3/16
32116-23-60	3		1-7/16		
32118-40-60	2-5/8		2-1/2		
32212-25-60	2-3/8	5 RW	1-9/16		1/4
32218-25-60	3-1/8		1-9/16		
32220-38-60	3		2-3/8		
32216-35-75	2-5/16	5 RW	2-3/16	75°	
32220-37-75	2-11/16		2-5/16		
32220-43-75	2-3/8		2-11/16		

Bend dimensions are for reference only

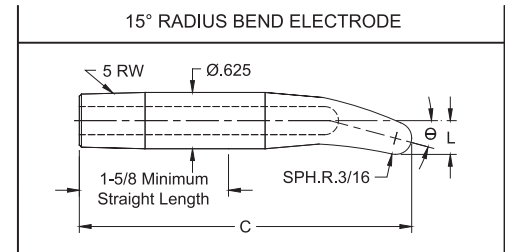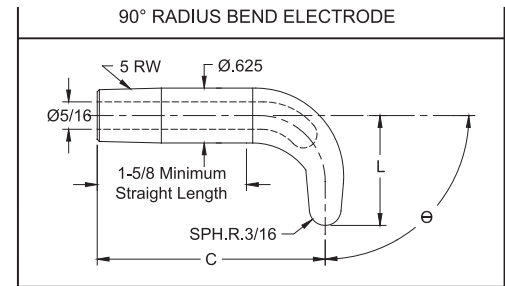


PART No.	O.A.L. C	Offset $\phi$ of Taper to Top of Radius L	Bend Angle $\theta$
16-26015	3-11/16	3/8	15°
16-26030	3-5/8	33/64	30°
16-26045	3-1/2	43/64	45°
16-26060	3-3/8	27/32	60°
16-26075	3-7/64	1-1/32	75°
16-26090	2-13/16	1-1/4	90°

Radius bend electrodes are designed for use with 18-768 & 18-784 straight universal adapters shown on page 46.

- See page 6 for Metric Conversion
- See page 7 for Taper Dimensions

Original Electrode "A" Offset 1/16 Increments "B" Bend In Degrees




04 = 1/4	26 = 1-5/8	15 = 15° Bend
06 = 3/8	28 = 1-3/4	30 = 30° Bend
08 = 1/2	30 = 1-7/8	45 = 45° Bend
10 = 5/8	32 = 2	60 = 60° Bend
12 = 3/4	34 = 2-1/8	75 = 75° Bend
14 = 7/8	36 = 2-1/4	90 = 90° Bend
16 = 1	38 = 2-3/8	
18 = 1-1/8	40 = 2-1/2	
20 = 1-1/4	42 = 2-5/8	
22 = 1-3/8	44 = 2-3/4	
24 = 1-1/2	46 = 2-7/8	

Example:  
3319-08-15  
= 1/2 Offset  
= 15° Bend

### SINGLE BEND ELECTRODE CODING SYSTEM

For electrodes not listed

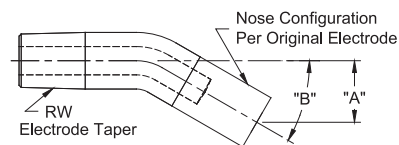






Offset D	Taper Size	Nose End		Taper End		Dome, Pointed & Flat, O.A.L. C	Pointed Nose Part No.
		N	T	N	T		
1/2	4 RW	3/4	7/8	2	2	321-0832-23	
		3/4	7/8	2-1/2	2	321-0840-23	
		2	7/8	3-1/4	2	321-0852-93	
	5 RW	1	1	2-1/2	1	322-0840-44	
3/4	4 RW	3/4	7/8	2	2	321-1232-23	
		3/4	7/8	2-1/2	2	321-1240-23	
		2	7/8	3-1/2	2	321-1256-93	
	5 RW	1	1	2-3/4	1	322-1244-44	
1	4 RW	3/4	7/8	2-1/4	2	321-1636-23	
		3/4	7/8	2-3/4	2	321-1644-23	
		1-3/4	7/8	3-1/4	2	321-1652-83	
		3/4	7/8	3-1/2	2	321-1656-23	
1-1/4	5 RW	1	1	2-3/4	1	322-1644-44	
		1	1	3	1	322-1648-44	
		1	1	3-1/2	1	322-1656-44	
		1-3/4	1	3-1/2	1	322-1656-84	
1-1/2	4 RW	3/4	7/8	2-1/2	2	321-2040-23	
		3/4	7/8	3	2	321-2048-23	
		1-1/2	7/8	3	2	321-2048-73	
		1	1	2-3/4	1	322-2044-44	
1-3/4	5 RW	1	1	3-1/4	1	322-2052-44	
		1	1	3-1/2	1	322-2056-44	
		1-1/2	1	3-1/2	1	322-2056-74	
		1-3/4	1	3-1/2	1	322-2056-84	
1-1/2	5 RW	1	1	2-3/4	1	322-2444-44	
1-3/4	5 RW	1-1/4	1	3	1	322-2448-64	
1-3/4	5 RW	1	1	2-3/4	1	322-2844-44	
		1-1/4	1	3	1	322-2848-64	

### DOUBLE BEND ELECTRODES

CMW double bend electrodes are cold formed from full hard straight electrodes, and have properties superior to those obtainable by casting or hot forging methods. Cooling tubes, unless otherwise specified are bent in place to provide coolant flow near the welding face as in the case of straight electrodes. These extra values assure you of longer electrode life, longer runs between dressings, and highest weld quality. CMW®3 material is standard for these electrodes. CMW®28, CMW®100, available on special order.

DOUBLE BEND POINTED NOSE

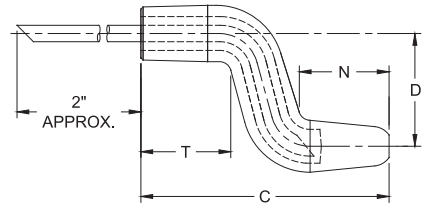


Bent dimensions are for reference only





Water Tube Sizes:  
4RW = .182 O.D.  
5RW = .245 O.D.

### DOUBLE BEND ELECTRODE CODING SYSTEM

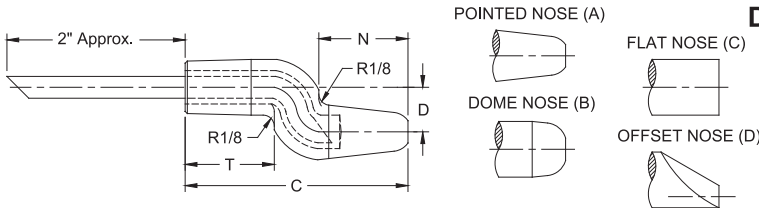


EXAMPLE:

322-0840-44

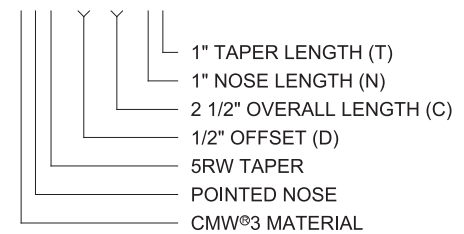

BENT DIMENSIONS REFERENCE ONLY

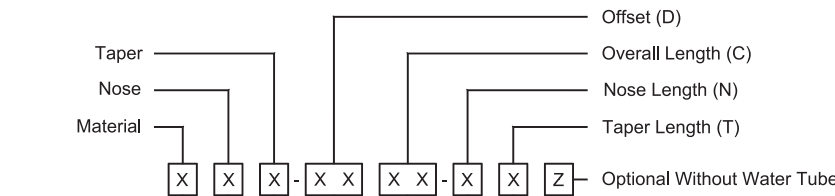

1= CMW®28
3= *CMW®3
5= CMW®100
*Standard

1= DOME
2= *POINTED
3= FLAT
4= OFFSET

1= 4RW 1MT
2= 5RW 2MT

08= 1/2"
12= 3/4"
16= 1"
20= 1 1/4"
24= 1 1/2"
28= 1 3/4"

Water Tube Sizes:  
4RW = .182 O.D.  
5RW = .245 O.D.

32= 2"
36= 2 1/4"
40= 2 1/2"
44= 2 3/4"
48= 3"
52= 3 1/4"
56= 3 1/2"
60= 3 3/4"

2= 3/4"
3= 7/8"
4= 1"
** 5= 1 1/8"
** 6= 1 1/4"
** 7= 1 1/2"
** 8= 1 3/4"
** 9= 2"

\*\*May not be a stock item  
Standard 4RW nose length = 3/4"  
Standard 4RW taper length = 7/8"  
Standard 5RW nose & taper length = 1"

- See Page 6 for Metric Conversion  
- See Page 7 for Taper Dimensions



**FEATURES AND SPECIFICATIONS**

- Very strong bend electrodes for higher force applications

- Bent & Offset electrodes are for hard to reach locations

- Long lasting heavy duty electrodes

- Works with all industry standard holders


- Use with 4 & 5 R.W.M.A Holders

- Bent dimensions are for reference only


- Electrical conductivity up to 85% IACS for cold formed crank electrodes

- Rockwell hardness up to 83 HRB for cold formed crank electrodes


**CRANK ELECTRODES - COLD FORMED**




16-38661 CMW<sup>®</sup>3  
COLD FORMED\*




16-3866 CMW<sup>®</sup>3  
COLD FORMED\*

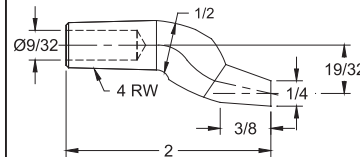


16-3870 CMW<sup>®</sup>3  
COLD FORMED\*

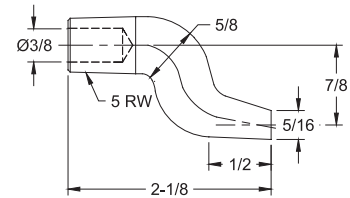


16-3871 CMW<sup>®</sup>3  
COLD FORMED\*

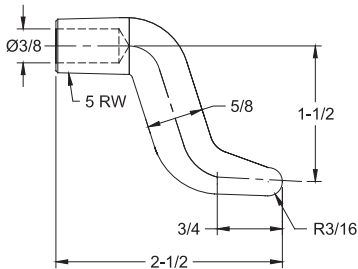


16-38351 CMW<sup>®</sup>3  
COLD FORMED\*

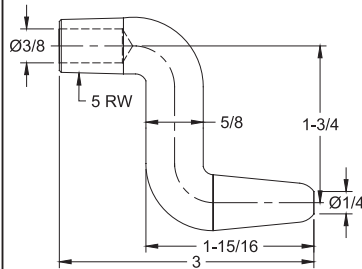

16-38352 CMW<sup>®</sup>3  
COLD FORMED\*



16-38353 CMW<sup>®</sup>3  
COLD FORMED\*



\*Optional materials CMW<sup>®</sup>28 and CMW<sup>®</sup>100 available on special order




**FEATURES AND SPECIFICATIONS**

- Very strong bend electrodes for higher force applications
- Offset electrodes are for hard to reach locations
- Long lasting heavy duty electrodes


- Can be used in many job shop applications
- Works with all industry standard holders
- Use with 4 & 5 R.W.M.A Holders

- Electrical conductivity up to 80% IACS for castings & forged crank electrodes
- Rockwell hardness up to 70 HRB for castings & forged crank electrodes


**CRANK ELECTRODES - CASTING, FORGED**

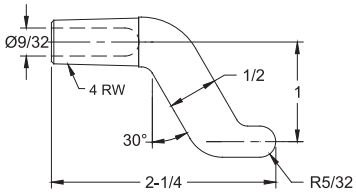


16-3835 CMW<sup>®</sup>3  
CASTING




16-3836 CMW<sup>®</sup>3  
CASTING




16-3837 CMW<sup>®</sup>3  
CASTING




16-3838 CMW<sup>®</sup>3  
CASTING

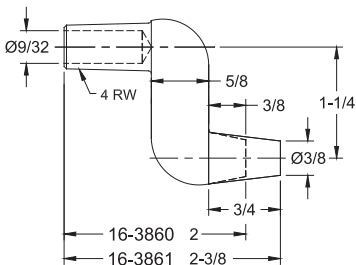


CMW<sup>®</sup>3  
FORGED

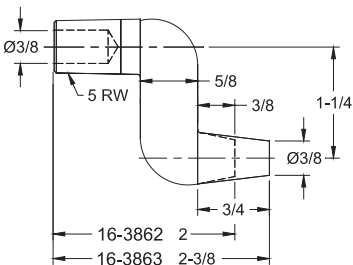

CMW<sup>®</sup>3  
FORGED



16-3873 CMW<sup>®</sup>3  
CASTING



16-3874 CMW<sup>®</sup>3  
CASTING




- See page 6 for  
Metric Conversions  
- See page 7 for  
Taper Dimensions


**SPADE ELECTRODES**




Bent Dimensions for Reference Only

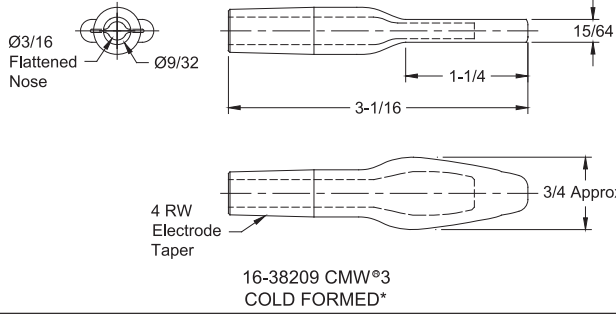


Bent Dimensions for Reference Only

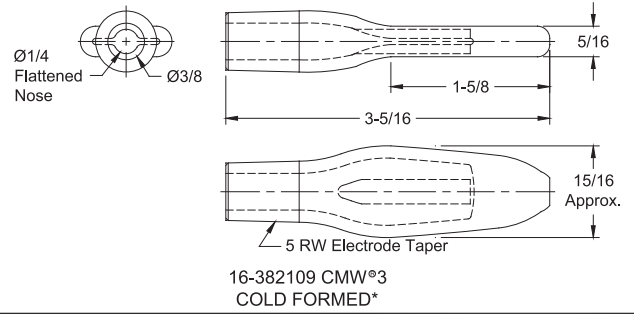


Bent Dimensions for Reference Only

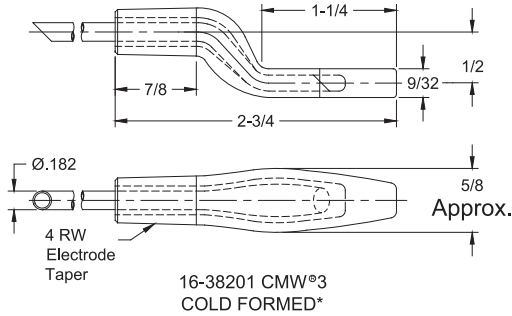


Bent Dimensions for Reference Only

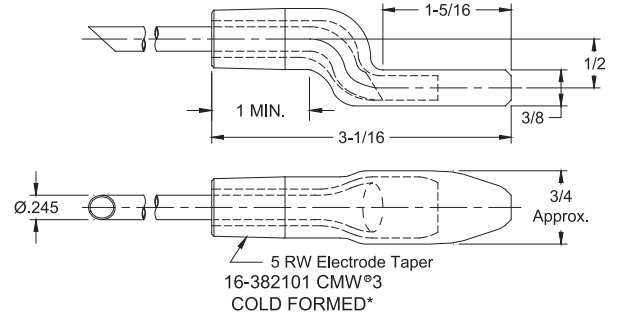

Bent Dimensions for Reference Only

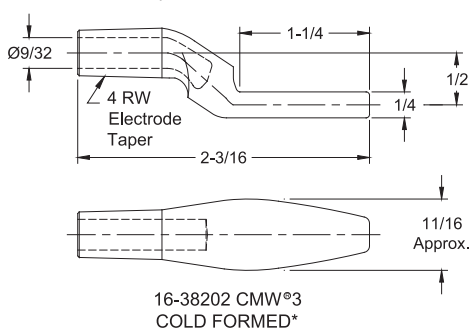

Bent Dimensions for Reference Only

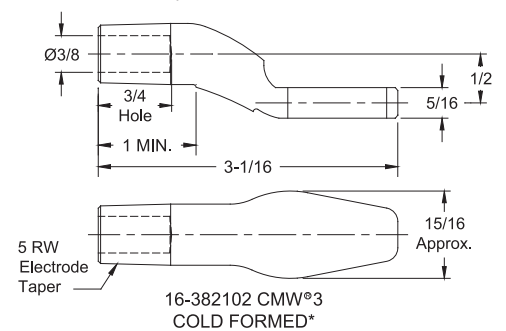


\*Optional material available on special order: CMW<sup>®</sup>28 & CMW<sup>®</sup>100






**GUN ELECTRODES**

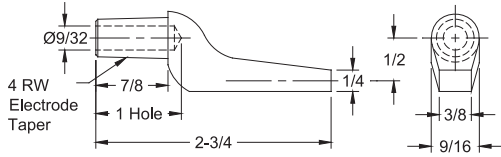


16-3820 CMW<sup>®</sup>3  
CASTING

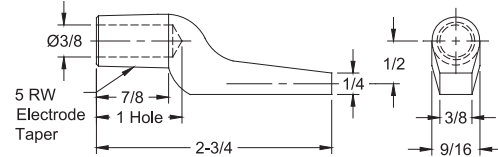

16-3821 CMW<sup>®</sup>3  
CASTING




Bent Dimensions for Reference Only

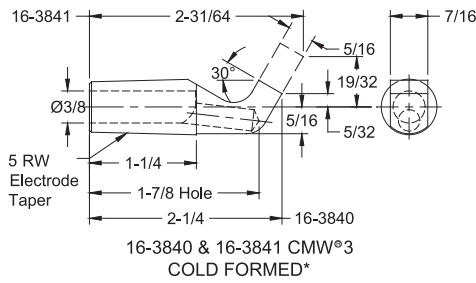


16-3840 & 16-3841 CMW<sup>®</sup>3  
COLD FORMED\*

Bent Dimensions for Reference Only

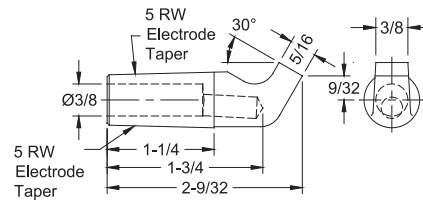

16-3847 CMW<sup>®</sup>3  
COLD FORMED\*

\*Optional material CMW<sup>®</sup>28 & CMW<sup>®</sup>100 available on special order.


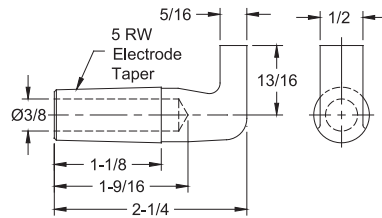


16-382120 CMW<sup>®</sup>3  
CASTING



- See page 6 for  
Metric Conversions  
- See page 7 for  
Taper Dimensions





**CHAMELEON/MAX-LIFE™ NUT WELDING ELECTRODES**

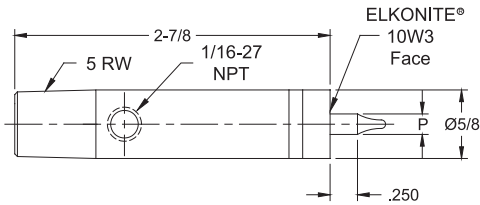


Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37725-04	#4	.142	16-37325	16-950078-01	16-950064-04	16-37725-C04
16-37725-05	#5	.158	16-37325	16-950078-01	16-950064-05	16-37725-C05
16-37725-06	#6	.173	16-37325	16-950078-01	16-950064-06	16-37725-C06
16-37725-M4	4MM	.187	16-37325	16-950078-01	16-950064-M4S	16-37725-CM4
16-37725-08	#8	.198	16-37325	16-950078-01	16-950064-08	16-37725-C08
16-37725-10	#10	.220	16-37325	16-950078-01	16-950064-10	16-37725-C10
16-37725-M5	5MM	.226	16-37325	16-950078-01	16-950064-M5S	16-37725-CM5
16-37725-12	#12	.250	16-37325	16-950078-01	16-950064-12	16-37725-C12
16-37725-M6	6MM	.266	16-37325	16-950078-01	16-950064-M6S	16-37725-CM6
16-37725-25	.250	.283	16-37325	16-950078-01	16-950064-25	16-37725-C25

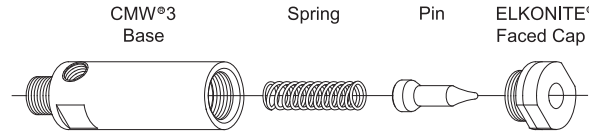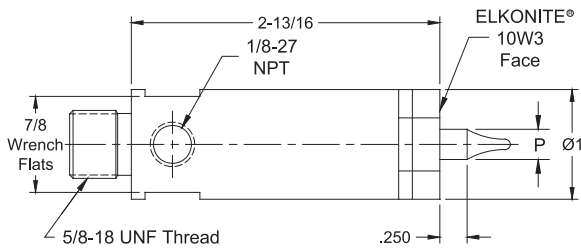

Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37825-M4	4MM	.187	16-37825	16-950065-01	16-950064-M4	16-37825-CM4
16-37825-M5	5MM	.226	16-37825	16-950065-01	16-950064-M5	16-37825-CM5
16-37825-M6	6MM	.266	16-37825	16-950065-01	16-950064-M6	16-37825-CM6
16-37825-M7	7MM	.305	16-37825	16-950065-01	16-950064-M7	16-37825-CM7
16-37825-M8	8MM	.344	16-37825	16-950065-01	16-950064-M8	16-37825-CM8
16-37825-M9	9MM	.384	16-37825	16-950065-01	16-950064-M9	16-37825-CM9

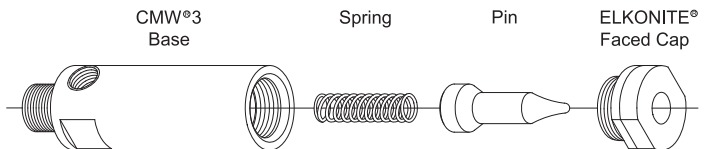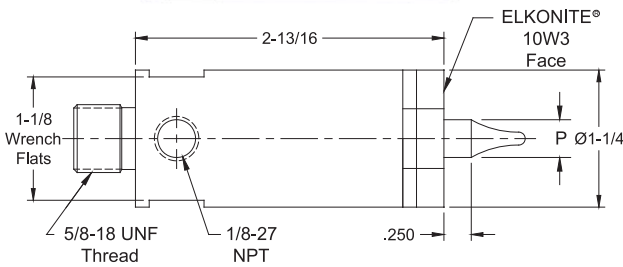


Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37826-M10	10MM	.423	16-37826	16-950065-01	16-950064-M10	16-37826-CM10
16-37826-M11	11MM	.463	16-37826	16-950065-01	16-950064-M11	16-37826-CM11
16-37826-M12	12MM	.502	16-37826	16-950065-01	16-950064-M12	16-37826-CM12
16-37826-M14	14MM	.581	16-37826	16-950065-01	16-950064-M14	16-37826-CM14



External Electrode Cooling Chamber

Electrode Dia.	Cooling Chamber Part No.	Tapered Adapter Part No.
5/8	18-1340	--
1	18-1342	18-7741
1-1/4	18-1343	18-7742



Tapered Adapter



All dimensions are in inches unless otherwise noted

- Electrode Assemblies 16-37825-XX and 16-37826-XXX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171, shown on page 32



- Electrode Assemblies 16-37825-XX and 16-37826-XXX may be used with Platen Mounted holders (page 61) by using adapter 18-7743 shown on page 31





**CHAMELEON/MAX-LIFE™ STUD WELDING ELECTRODES**

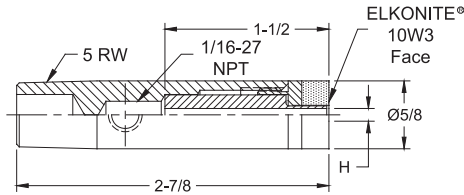


Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW®3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE® Faced Cap
16-37325-116	#4	.116	16-37325	16-953116	16-37325-C116
16-37325-132	#5	.132	16-37325	16-953132	16-37325-C132
16-37325-140	#6	.140	16-37325	16-953140	16-37325-C140
16-37325-169	#8	.169	16-37325	16-953169	16-37325-C169
16-37325-169	4MM	.169	16-37325	16-953169	16-37325-C169
16-37325-191	#10	.191	16-37325	16-953191	16-37325-C191
16-37325-204	5MM	.204	16-37325	16-953204	16-37325-C204
16-37325-220	#12	.220	16-37325	16-953220	16-37325-C220
16-37325-243	6MM	.243	16-37325	16-953243S	16-37325-C243
16-37325-254	.250	.254	16-37325	16-953254S	16-37325-C254

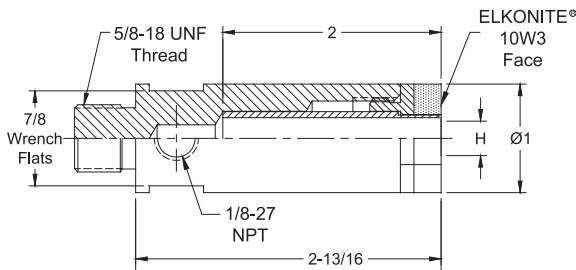

Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW®3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE® Faced Cap
16-37525-243	6MM	.243	16-37825	16-953243	16-37525-C243
16-37525-254	.250	.254	16-37825	16-953254	16-37525-C254
16-37525-320	.312	.320	16-37825	16-953320	16-37525-C320
16-37525-320	8MM	.320	16-37825	16-953320	16-37525-C320
16-37525-380	.375	.380	16-37825	16-953380	16-37525-C380

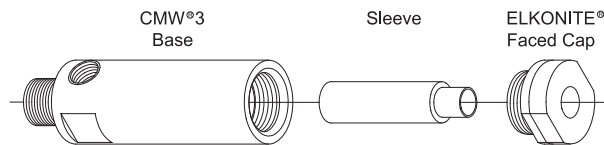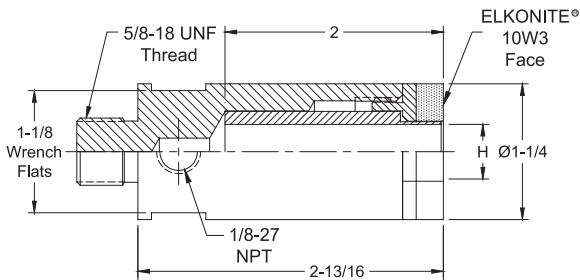


Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW®3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE® Faced Cap
16-37526-399	10MM	.399	16-37526	16-953399	16-37526-C399
16-37526-444	.438	.444	16-37526	16-953444	16-37526-C444
16-37526-477	12MM	.477	16-37526	16-953477	16-37526-C477
16-37526-502	.500	.502	16-37526	16-953502	16-37526-C502
16-37526-630	.625	.630	16-37526	16-953630	16-37526-C630



External Electrode Cooling Chamber

Electrode Dia.	Cooling Chamber Part No.	Tapered Adapter Part No.
5/8	18-1340	--
1	18-1342	18-7741
1-1/4	18-1343	18-7742



Tapered Adapter

- Electrode Assemblies 16-37525-XXX and 16-37526-XXX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171, shown on page 32


- Electrode Assemblies 16-37525-XXX and 16-37526-XXX may be used with Platen Mounted holders (page 61) by using adapter 18-7743 shown on page 31




**SELF-PILOTING NUT WELDING ELECTRODES**




PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3764-04	5 RW	.082	#4	.093
16-3764-05		.093	#5	
16-3764-06		.100	#6	
16-3764-M3.5		.107	3.5 MM	
16-3764-M4	5 RW	.123	4.0 MM	.156
16-3764-08		.129	#8	
16-3764-10		.143	#10	
16-3764-M5		.156	5.0 MM	



PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3765-12	5 RW	.166	#12	.375
16-3765-M6		.189	6.0 MM	
16-3765-25		.192	1/4	
16-3765-M7		.223	7.0 MM	
16-3765-M8	5 RW	.252	8.0 MM	.375
16-3765-31		.257	5/16	
16-3765-M9		.291	9.0 MM	




PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3766-38	5 RW	.306	3/8	.375
16-3766-M10		.320	10 MM	
16-3766-M11		.359	11 MM	
16-3766-44		.361	7/16	
16-3766-M12	5 RW	.388	12 MM	.375
16-3766-50		.415	1/2	
16-3766-M14		.455	14 MM	



**FEATURES AND SPECIFICATIONS**

- ELKONITE®10W3 faced CMW® 3 material
- Insulated pin made of anodized aluminum
- Pins are treated to 55 HRC for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes

**TYPICAL SET-UP FOR SELF PILOTING NUTS**

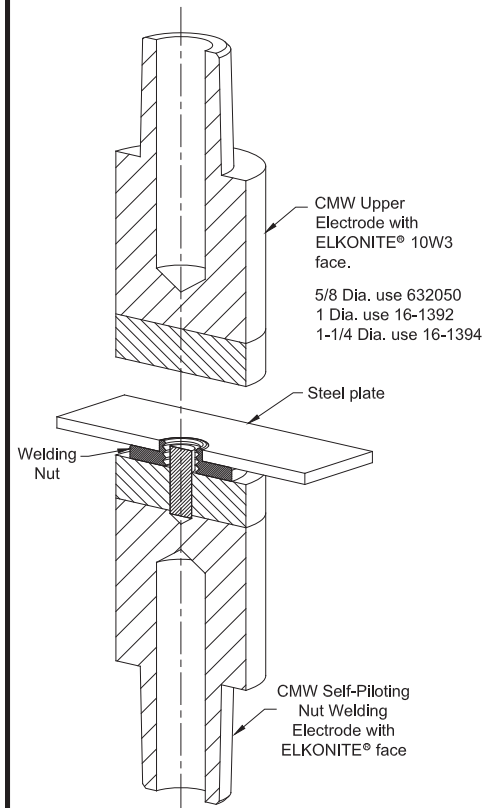

- See page 6 for Metric conversions
- See page 7 for Taper dimensions







**NON-PILOTING NUT WELDING ELECTRODES**




PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3774-04		.082		.142	#4	16-950001-04
16-3774-05		.093		.158	#5	16-950001-05
16-3774-06		.100		.173	#6	16-950001-06
16-3774-08	5RW	.129	.312	.198	#8	16-950001-08
16-3774-10		.143		.220	#10	16-950001-10
16-3774-M6		.186		.250	6MM	16-950001-M6

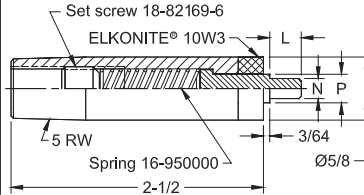


PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3775-12		.166		.250	#12	16-950001-12
16-3775-M6		.186		.250	6MM	16-950001-M6
16-3775-25		.192		.283	1/4	16-950001-25
16-3775-M8	5RW	.252	.312	.283	8MM	16-950001-M8
16-3775-31		.257		.345	5/16	16-950001-31
16-3775-M10		.322		.347	10MM	16-950001-M10

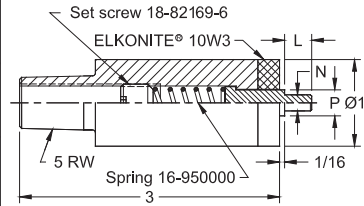

PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3785-12	5/8-18	.166		.250	#12	16-950002-12
16-3785-M6		.186		.269	6MM	16-950002-M6
16-3785-25		.192		.283	1/4	16-950002-25
16-3785-M8		.252		.348	8MM	16-950002-M8
16-3785-31		.257		.345	5/16	16-950002-31
16-3785-M10		.320		.427	10MM	16-950002-M10
16-3785-M11		.359		.466	11MM	16-950002-M11
16-3785-M12		.388		.470	12MM	16-950002-M12

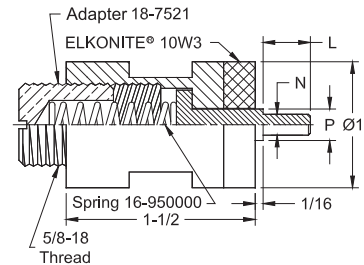


PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3786-12	5/8-18	.166		.250	#12	16-950002-12
16-3786-M6		.186		.269	6MM	16-950002-M6
16-3786-25		.192		.283	1/4	16-950002-25
16-3786-M8		.252		.348	8MM	16-950002-M8
16-3786-31		.257		.345	5/16	16-950002-31
16-3786-38		.306		.408	3/8	16-950002-38
16-3786-M10		.320		.427	10MM	16-950002-M10
16-3786-M11		.359		.466	11MM	16-950002-M11
16-3786-44		.361		.470	7/16	16-950002-44
16-3786-M12		.388		.470	12MM	16-950002-M12
16-3786-50		.415		.533	1/2	16-950002-50

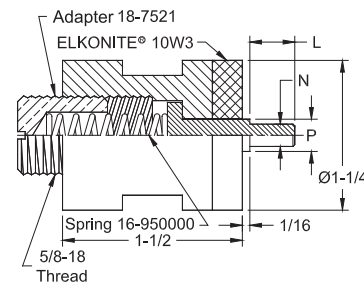

**FEATURES AND SPECIFICATIONS**

- ELKONITE® 10W3 faced CMW® 3 material
- Insulated pin made of anodized aluminum
- Insulated pins are treated to 55 HRC for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes
- Accepts external cooling chambers

**TYPICAL SET-UP FOR NON PILOTING NUTS**

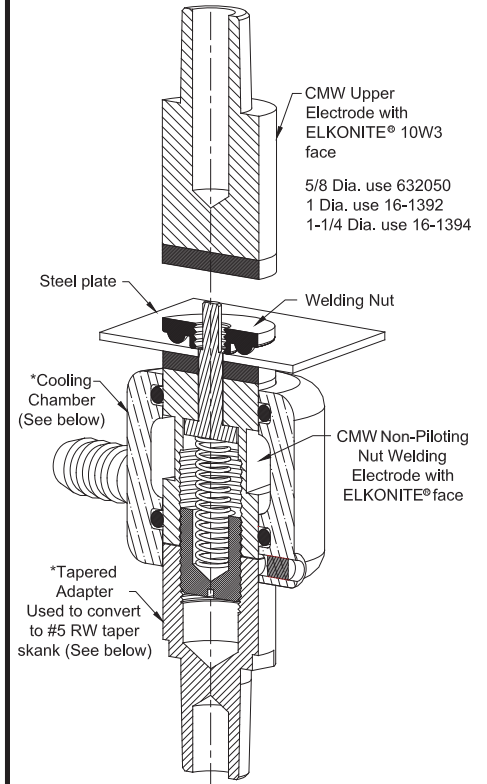

\*For additional information on cooling chamber and tapered adapter see page 27

Electrode assemblies 18-3785-XX and 18-3786-XX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171



**FEATURES AND SPECIFICATIONS**


- Cooling Chamber recommended for additional cooling capacity on internally cooled applications
- Cooling Chamber is designed to provide supplementary cooling in special, hard to cool applications

- Securely sealed and locked in position with allen head set screw
- Tapered Adapter converts 5/8-18 thread to 5 RW tapers
- Use with Stud/Nut welding applications


**WELDING ELECTRODE ACCESSORIES**






TAPERED ADAPTER			
Part No.	To Fit Dia. Electrode A	Taper	Overall Length C
18-7741	1	5 RW	1-3/4
18-7742	1-1/4	5 RW	1-3/4



**TAPERED ADAPTER CONVERSION FROM 5/8-18 THREAD TO 5 RW TAPER**

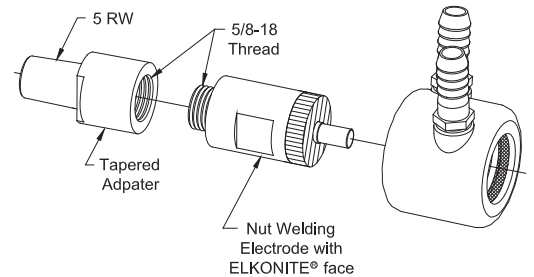

COOLING CHAMBER			
Part No.	To Fit Dia. Electrode A	O.D. B	Overall Length C
18-1340	5/8	1-1/4	1-1/2
18-1341	7/8	1-1/2	1-1/2
18-1342	1	1-3/4	1-1/2
18-1343	1-1/4	2	1-7/8

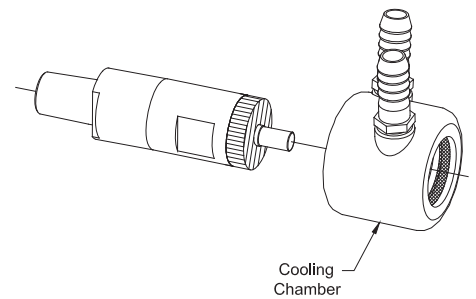


ASSEMBLED CONVERSION



**STUD WELDING ELECTRODES**



Assembled Electrode Part Number			Insulation I.D. H	Screw Thread Size
Depth B				
.375	.750	1.125	.116 .132	#4 #5
16-3724-1161	16-3724-1162	16-3724-1163		
16-3724-1321	16-3724-1322	16-3724-1323		
.500	1.000	1.500	.140 .150 .157 .169	#6 -- -- #8
16-3724-1401	16-3724-1402	16-3724-1403		
16-3724-1501	16-3724-1502	16-3724-1503		
16-3724-1571	16-3724-1572	16-3724-1573		
16-3724-1691	16-3724-1692	16-3724-1693		
.750	1.500	--	.191 .220 .254	#10 #12 #20
16-3724-1911	16-3724-1912			
16-3724-2201	16-3724-2202			
16-3724-2541	16-3724-2542			




**FEATURES AND SPECIFICATIONS**


- ELKONITE® 10W3 faced CMW\*3 material
- Insulated sleeve made of anodized aluminum
- Insulated sleeve are treated to 55 HRC both I.D. & O.D. for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes
- Accepts external Cooling Chambers




Assembled Electrode Part Number		Insulation I.D. H	Screw Thread Size
Depth B			
.750	1.500	.254	.250
16-3725-2541	16-3725-2542		
1.000	2.000	.277 .317 (8MM) .339 .365 .380	-- .312 -- -- -- .375
16-3725-2771	16-3725-2772		
16-3725-3171	16-3725-3172		
16-3725-3391	16-3725-3392		
16-3725-3651	16-3725-3652		
16-3725-3801	16-3725-3802		

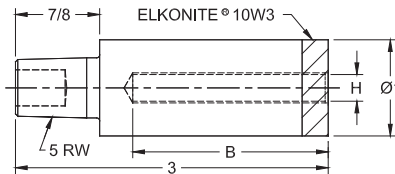

**TYPICAL SET-UP FOR STUD WELDING**

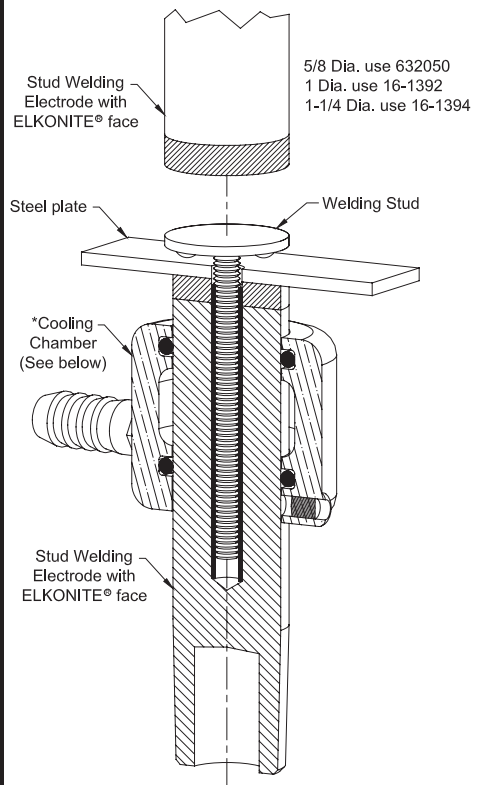

Assembled Electrode Part Number		Insulation I.D. H	Screw Thread Size
Depth B			
1.000	2.000	.401 .427 .444 .502	-- -- .437 .500
16-3726-4011	16-3726-4012		
16-3726-4271	16-3726-4272		
16-3726-4441	16-3726-4442		
16-3726-5021	16-3726-5022		
1.000	2.000	.552 .630 .676 .801	-- .625 -- --
16-3726-5521	16-3726-5522		
16-3726-6301	16-3726-6302		
16-3726-6761	16-3726-6762		
16-3726-8011	16-3726-8012		

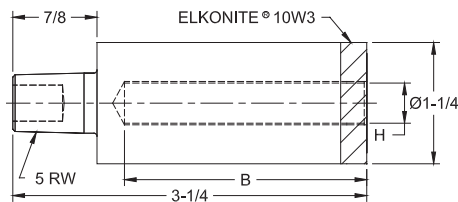

\*For additional information on cooling chamber see page 27


Electrode Dia.	Cooling Chamber
5/8	18-1340
1	18-1342
1-1/4	18-1343




**SWIVEL HEAD BACK-UP ELECTRODES**

Standard material: Shank - CMW®3  
Cap - CMW®3  
Optional material available on special order:  
Cap-CMW®100, ELKONITE® & ELKON® facing


PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-2304	4 RW	9/32	7/8	Thru hole with "O" ring
16-2305	5 RW	3/8	7/8	
16-2302	4 RW	9/32	1	
16-2303	5 RW	3/8	1	
16-2300	4 RW	9/32	1-1/4	
16-2301	5 RW	3/8	1-1/4	
16-2306	5 RW	3/8	1-1/2	

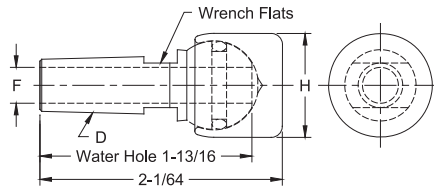

PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-2314	4 RW	9/32	7/8	Blind hole
16-2315	5 RW	3/8	7/8	
16-2312	4 RW	9/32	1	
16-2313	5 RW	3/8	1	
16-2310	4 RW	9/32	1-1/4	
16-2311	5 RW	3/8	1-1/4	
16-2316	5 RW	3/8	1-1/2	

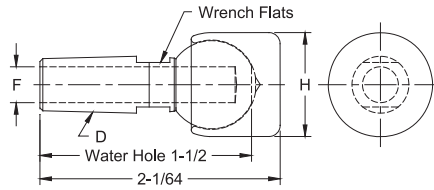


PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-23129	4 RW	9/32	1	Blind hole with spring and ball
16-23139	5 RW	3/8	1	
16-23109	4 RW	9/32	1-1/4	
16-23119	5 RW	3/8	1-1/4	
16-23169	4 RW	9/32	1-1/2	
16-23179	5 RW	3/8	1-1/2	

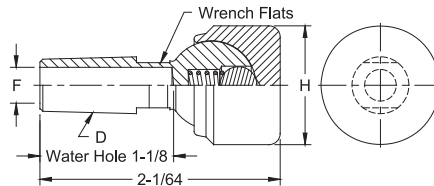


**LARGE DIAMETER FLAT FACED BACK-UP ELECTRODES**


PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-3012	CMW®3	1-1/4	4 RW	9/32	7/8	3/4
16-3010						1
16-3030						1-1/4

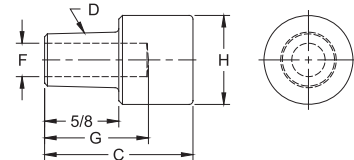

PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-3021	CMW®3	1-1/2	5 RW	3/8	1-1/8	7/8
16-3020						1
16-3040						1-1/4
16-3050						1-1/2

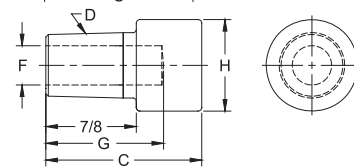


PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-1392	ELKONITE® 10W3	2	5 RW	3/8	1-1/2	1
16-1393						5/8
16-1394						1-1/4
16-1395						5/8

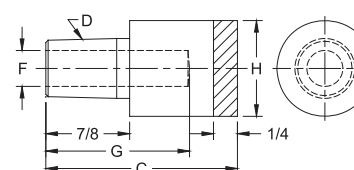


**SQUARE & RECTANGULAR FACED BACK-UP ELECTRODES**

PART No.	Weld Face Material	O.A.L. C	Taper D	Shank Length E	Water Hole Dia. F	Weld Face Lgth. A	Weld Face Width B
16-3111	2						
16-382160	1-1/2						
16-3121	2						

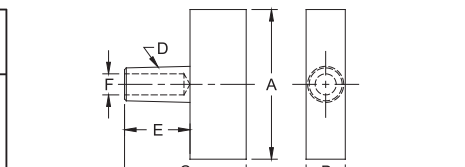

PART No.	Weld Face Material	O.A.L. C	Taper D	Shank Length E	Water Hole Dia. F	Weld Face Lgth. A	Weld Face Width B
16-3120	5/8						
16-384110	1/2						




Other tapers and alloys available to special order






**THREADED ELECTRODES**




FEMALE FLAT




FEMALE TRUNCATED

**CMW<sup>®</sup>3 FEMALE THREADED ELECTRODES**

CMW <sup>®</sup> 3 PART No.	Type	O.A.L.	Thread	Major Dia.	Thread Depth	Water Hole Depth	Water Hole Dia.	Over Wrench Flats	Wrench Flat Length	Welding Face Dia.
		C	D	A	E	G	F		K	H
336508	Female Flat	2	5/8-18	1	3/4	1-1/4	37/64	7/8	3/4	1
336510				1-1/4	3/4			1	3/4	1-1/4
336512				1-1/2	3/4			1-1/4	7/8	1-1/2
326508	Female Truncat.	2	5/8-18	1	3/4	1-1/4	37/64	7/8	3/4	3/8
326510				1-1/4	3/4			1	3/4	1/2
326512				1-1/2	3/4			1-1/4	7/8	5/8




MALE FLAT




MALE TRUNCATED

**CMW<sup>®</sup>3 MALE THREADED ELECTRODES**


CMW <sup>®</sup> 3 PART No.	Type	O.A.L.	Thread	Major Dia.	Thread Depth	Water Hole Depth	Water Hole Dia.	Over Wrench Flats	Wrench Flat Length	Welding Face Dia.
		C	D	A	E	G	F		K	H
330507	Male Flat	2	5/8-18	7/8	9/16	1-1/4	5/16	3/4	5/8	7/8
330508			5/8-18	1	9/16		5/16	7/8	5/8	1
335506			5/8-11	3/4	15/32		5/16	5/8	1/2	3/4
335507			5/8-11	7/8	15/32		5/16	3/4	3/4	7/8
335508			3/4-10	1	5/8		3/8	7/8	7/8	1
335510	Male Truncat.	2	3/4-10	1-1/4	5/8	1-1/4	3/8	3/4	3/4	1-1/4
325506			7/8-9	1-1/2	3/4		1/2	1-1/4	7/8	1-1/2
325507			5/8-11	7/8	15/32		5/16	3/4	5/8	5/16
325508	3/4-10	1	5/8	3/8	7/8	5/8	3/8	3/8		
325510	3/4-10	1-1/4	5/8	3/8	1	3/4	1/2			



ELKONITE<sup>®</sup> FACED FEMALE FLAT



ELKONITE<sup>®</sup> FACED FEMALE CENTERED



ELKONITE<sup>®</sup> FACED MALE CENTERED

**ELKONITE<sup>®</sup> FACED MALE & FEMALE THREADED ELECTRODES**


ELKONITE <sup>®</sup> 10W3 PART No.	Type	O.A.L.	Thread	Major Dia.	Thread Depth	Water Hole Depth	Water Hole Dia.	Over Wrench Flats	Wrench Flat Length	Welding Face Dia.	ELKONITE <sup>®</sup> Thickness				
		C	D	A	E	G	F		K	H	B				
636308	Female Flat	1-1/2	5/8-18	1	3/4	1	37/64	7/8	1/2	1	1/4				
636310				1-1/4	3/4			1	1/2	1-1/4					
636312				1-1/2	3/4			1-1/4	7/8	1-1/2					
626308	Female Centered	1-1/2	5/8-18	1	3/4	1	37/64	7/8	13/16	5/8	1/4				
626310				1-1/4	3/4			1	11/16	5/8					
620307	Male Centered	1-1/2	5/8-18	7/8	9/16	1	5/16	3/4	3/4	1/2	1/4				
625206				1-1/4	5/8-11			3/4	15/32	7/8		5/16	3/4	1/2	3/16
625308				1-5/8	3/4-10			1	5/8	1-3/16		3/8	7/8	7/8	5/8






**ADAPTERS**

MALE TAPER TO FEMALE TAPER ADAPTERS								
Adapter Part No.	Male Taper			Female Taper		Length Under Head M	Hex. Over Flats H	Overall Length C
	Size L	Minor Dia. J	Dia. at 1/2 K	Size D	Major Dia. A			
18-741	5 RW	.588	.613	4 RW	.463	7/8	7/8	1-3/16
18-742	7 RW	.819	.844	5 RW	.625	1-3/16	1	1-1/2
18-7414	6 RW	.706	.731	5 RW	.625	7/8	1	1-3/16
18-7415	4 RW	.438	.463	5 RW	.625	5/8	7/8	1-3/4
18-7416	5 RW	.588	.613	6 RW	.750	7/8	1	2-1/4




MALE PIPE THREAD TO FEMALE TAPER ADAPTERS						
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Head M	Hex. Over. Flats H	Overall Length C
		Size D	Major Dia. A			
18-746-07	1/2-14 pipe	4 RW	.463	5/8	1	7/8
18-747-07	1/2-14 pipe	5 RW	.625	5/8	1	7/8
18-7465-07	1/2-14 pipe	5 RW Male Cap	.414	9/16	7/8	7/8
18-748-06	5/8-14 pipe	4 RW	.463	9/16	1	3/4
18-749-06	5/8-14 pipe	5 RW	.625	9/16	1	3/4
18-756-09	3/4-14 pipe	4 RW	.463	7/8	1-1/4	1-1/8
18-757-09	3/4-14 pipe	5 RW	.625	7/8	1-1/4	1-1/8
18-7576-09	3/4-14 pipe	6 RW	.750	7/8	1-1/4	1-1/8




\*Adapters of longer lengths available in 1/8" increments upon request

MALE THREAD TO FEMALE TAPER ADAPTERS							
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Head M	Hex or Dia. Over. Flats H	Overall Length C	Sealing Ring Part No.
		Size D	Major Dia. A				
18-750	5/8-18	4 RW	.463	9/16	7/8 Hex	13/16	18-10060-11
18-751	5/8-18	5 RW	.625	9/16	1 Hex	1-11/16	18-10060-11
18-755*	3/4-10	5 RW	.625	9/16	1 Dia.	1-9/16	18-10060-12
18-770	7/8-14	4 RW	.463	5/8	1 Hex	13/16	18-76460
18-771	7/8-14	5 RW	.625	5/8	1 Hex	13/16	18-76460
18-7743	1-14	5/8-18 Thd.	-	5/8	1-1/4 Hex	1	18-10060-17
18-785	1-14	4 RW	.463	9/16	1-1/4 Hex	13/16	18-10060-17
18-786	1-14	5 RW	.625	9/16	1-1/4 Hex	13/16	18-10060-17
18-7863	1-14	6 RW	.750	3/4	1-1/4 Hex	1-3/4	18-10060-17
18-787	1-14	7 RW	.875	3/4	1-1/4 Hex	2-1/8	18-10060-17
18-7875	1-14	5 RW	.625	9/16	1-1/4 Dia.	11/16	18-10060-17
18-7876	1-14	6 RW	.750	5/8	1-1/4 Dia.	7/8	18-10060-17



\*This part has 3/4" wrench flats


FEMALE THREAD TO FEMALE TAPER ADAPTERS						
Adapter Part No.	Female Thd. Size L	Female Taper		Outside Dia. B	Over Wrench Flats H	Overall Length C
		Size D	Major Dia. A			
18-753	5/8-18	4 RW	.475	1	3/4	1-5/8
18-754	5/8-18	5 RW	.625	1	3/4	1-5/8
18-7591	3/4-10	4 RW	.463	1-1/4 Hex.	1-1/4	1-3/4
18-7592	3/4-10	5 RW	.625	1-1/4 Hex.	1-1/4	1-3/4

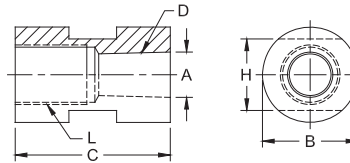



See page 6 for Metric Conversions  
See page 7 for Taper Dimensions  
See page 34 for ejector type adapters

**CONVERSION FROM 5/8-18 THREAD INTO 4, 5, 6, RW TAPER**



Part No. 18-752




Threaded adapter used with tapered adapter to convert holder to use tapered electrodes.



**CONVERSION FROM THREADED ADAPTER INTO 4, 5, 6, RW TAPER**




Part No. 18-82650






**100 SERIES (NON-EJECTOR) WATER COOLED ELECTRODE HOLDER**

100 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-101 18-102 18-103 18-104	.463	3/4 7/8 1 1-1/4	3	4 RW	1/2
18-106 18-107 18-108	.625	1 1-1/4 1-1/2		5 RW	
18-111 18-112 18-113 18-114	.463	3/4 7/8 1 1-1/4	8	4 RW	1/2
18-116 18-117 18-118	.625	1 1-1/4 1-1/2		5 RW	
18-119 18-120	.875	1-1/4 1-1/2	12	7 RW	1-1/8
18-131 18-132 18-133 18-134	.463	3/4 7/8 1 1-1/4		4 RW	
18-136 18-137 18-138	.625	1 1-1/4 1-1/2	12	5 RW	3/4

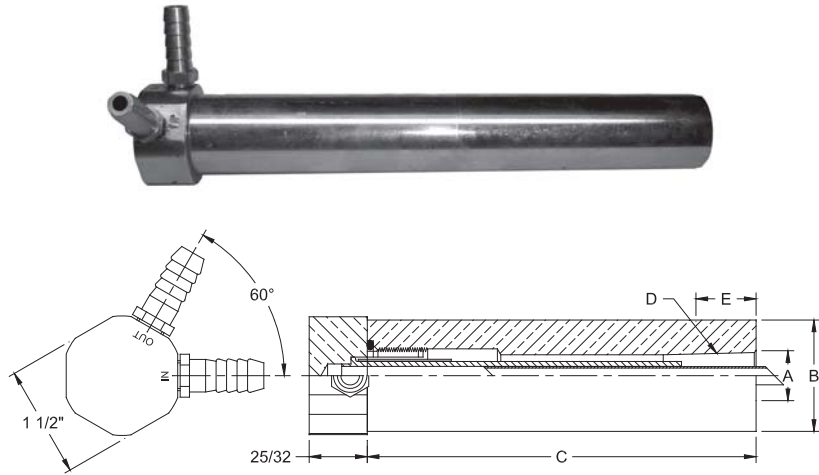



100 SERIES THREADED HOLDER				
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Electrode E
18-169 18-170 18-171	1 1-1/4 1-1/2	8	5/8-18	9/16
18-172 18-173 18-174	1 1-1/4 1-1/2		7/8-14	
18-175 18-176	1-1/4 1-1/2	8	1-14	3/4



See available adapters in table below.


**ADAPTERS USED WITH THREADED HOLDERS**

100 SERIES THREADED HOLDER ADAPTERS					
Holder Assembly No.		Adapter Part No.	Page No.	Attachment Description	
18-169 18-170 18-171	Use with	18-750	31	4 RW Female	May also be used with universal Adapters having 7/8-14 Male thread See page 46
		18-751	31	5 RW Female	
		18-752	31	5/8-18 M. Thread	
		18-811	48	#1 Size Nu-Twist®	
18-172 18-173 18-174	Use with	18-770	31	4 RW Female	May also be used with universal Adapters having 7/8-14 Male thread See page 46
		18-771	31	5 RW Female	
18-175 18-176	Use with	18-785	31	4 RW Female	May also be used with universal Adapters having 1-14 Male thread See page 46
		18-786	31	5 RW Female	
		18-7863	31	6 RW Female	
		18-787	31	7 RW Female	
		18-812	48	#2 Size Nu-Twist®	

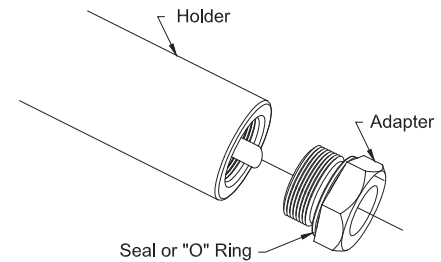



**100 SERIES (NON-EJECTOR) WATER COOLED ELECTRODE HOLDER**

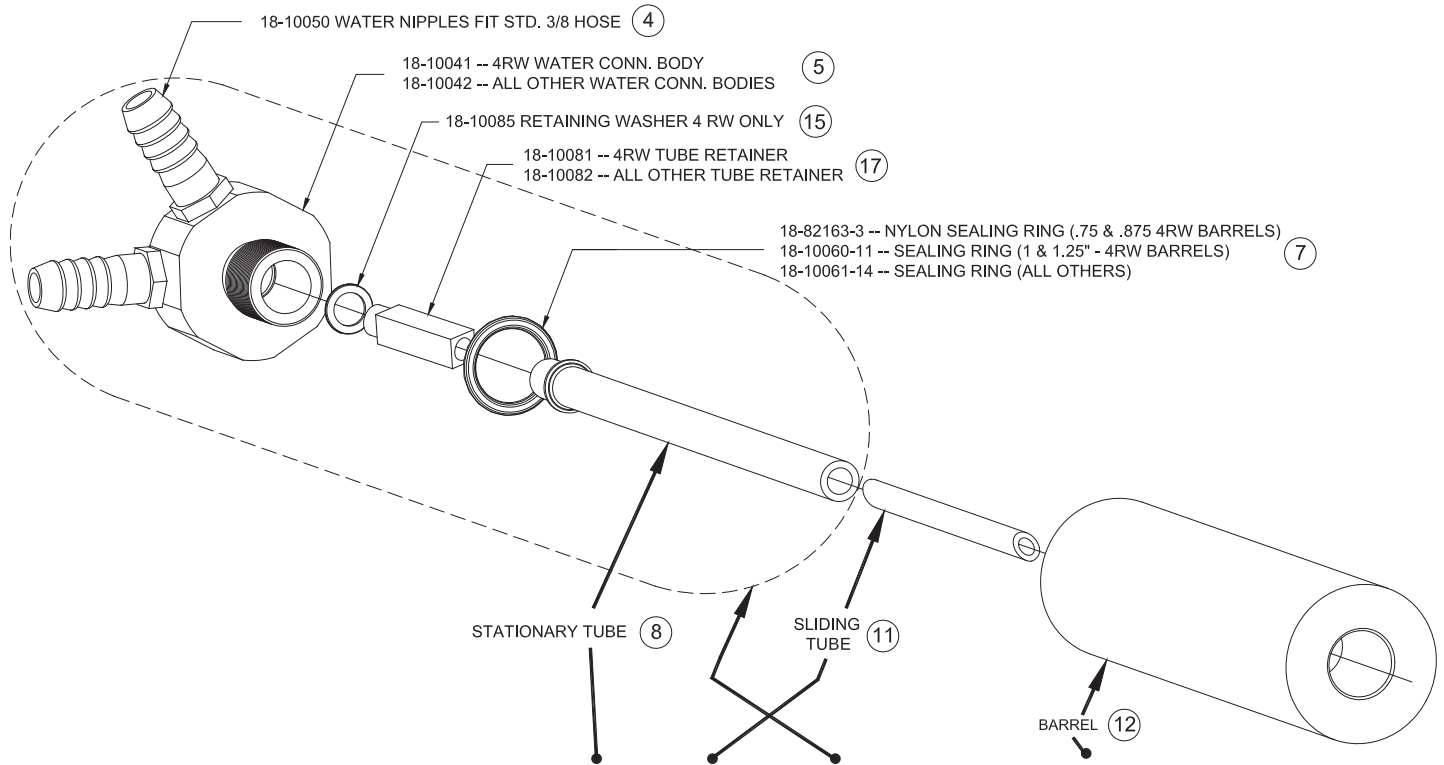

Part No. Holder Assy.	Thread Or Taper	Barrel Length	Stationary Tube	Sliding Tube	Water Conn. HD. Sub-Assy. Include Parts: 4 5 7 8 15 17	Barrel Diameter	Barrel
18-101 18-102 18-103 18-104	4 RW	3	18-10044-3	18-10046-3	18-10091-3	3/4 7/8 1 1-1/4	18-11110-3 18-11210-3 18-11310-3 18-11410-3
18-106 18-107 18-108	5 RW	3	18-10045-3	18-10047-3	18-10092-3	1 1-1/4 1-1/2	18-11610-3 18-11710-3 18-11810-3
18-111 18-112 18-113 18-114	4 RW	8	18-10044-8	18-10046-8	18-10091-8	3/4 7/8 1 1-1/4	18-11110-8 18-11210-8 18-11310-8 18-11410-8
18-116 18-117 18-118	5 RW	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-11610-8 18-11710-8 18-11810-8
18-119 18-120	7 RW	8	18-10045-8	18-10047-8	18-10092-8	1-1/4 1-1/2	18-11910-8 18-12010-8
18-131 18-132 18-133 18-134	4 RW	12	18-10044-12	18-10046-8	18-10091-12	3/4 7/8 1 1-1/4	18-11110-12 18-11210-12 18-11310-12 18-11410-12
18-136 18-137 18-138	5 RW	12	18-10045-12	18-10047-8	18-10092-12	1 1-1/4 1-1/2	18-11610-12 18-11710-12 18-11810-12
18-169 18-170 18-171	5/8-18	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-16910-8 18-17010-8 18-17110-8
18-172 18-173 18-174	7/8-14	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-17210-8 18-17310-8 18-17410-8
18-175 18-176	1-14	8	18-10045-8	18-10047-8	18-10092-8	1-1/4 1-1/2	18-17510-8 18-17610-8






**200 SERIES (EJECTOR) WATER COOLED ELECTRODE HOLDER**



200 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-201	.463	3/4	3	4 RW	1/2
18-202		7/8			
18-203		1			
18-204		1-1/4			
18-206	.625	1	8	5 RW	3/4
18-207		1-1/4			
18-208		1-1/2			
18-211	.463	3/4	12	4 RW	1/2
18-212		7/8			
18-213		1			
18-214		1-1/4			
18-216	.625	1	8	5 RW	3/4
18-217		1-1/4			
18-218		1-1/2			
18-219*	.875	1-1/4	18	5 RW	1-1/8
18-220*		1-1/2			
18-231	.463	3/4	12	4 RW	1/2
18-232		7/8			
18-233		1			
18-234		1-1/4			
18-236	.625	1	8	5 RW	3/4
18-237		1-1/4			
18-238		1-1/2			
18-236-18	.625	1	18	5 RW	3/4
18-237-18		1-1/4			
18-238-18		1-1/2			

\*Must use knockout adapter 18-20033

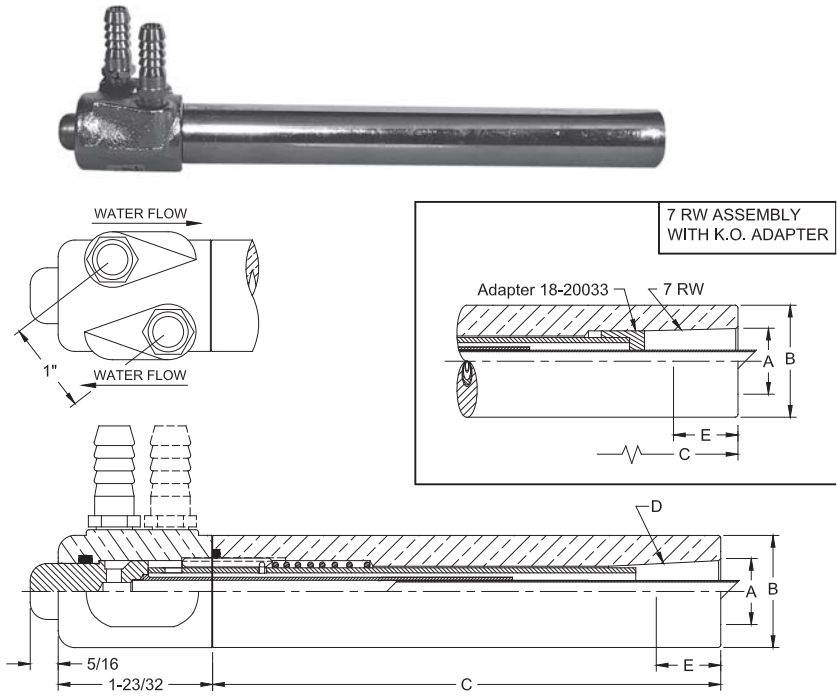

200 SERIES THREADED HOLDER				
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Elect. E
18-272	1	8	7/8-14	9/16
18-273	1-1/4			
18-274	1-1/2			
18-275	1-1/4	1-14	1-14	3/4
18-276	1-1/2			

200 Series Threaded Holder can use Male Threaded to Female Taper Universal Adapters on page 46.

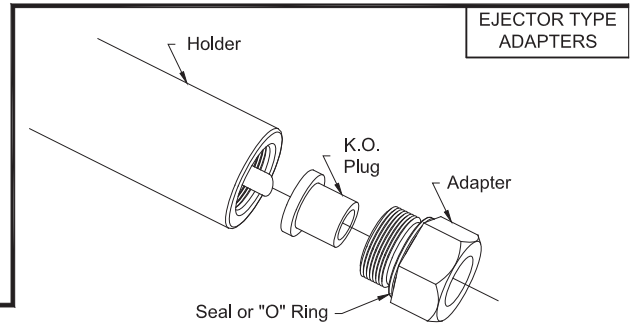


**EJECTOR TYPE ADAPTERS**

EJECTOR TYPE ADAPTERS 7/8-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia. A					
18-7702	7/8-14	4 RW	.463	5/8	1	13/16	18-76460	18-78501
18-7712	7/8-14	5 RW	.625	1/2	1	1-1/16	18-76460	18-7712-3

Use with Threaded Ejector Holder to make Replaceable Taper Holders

Part No.	Female Thd. Size	Barrel Dia.
18-272	7/8-14	1
18-273	7/8-14	1-1/4
18-274	7/8-14	1-1/2

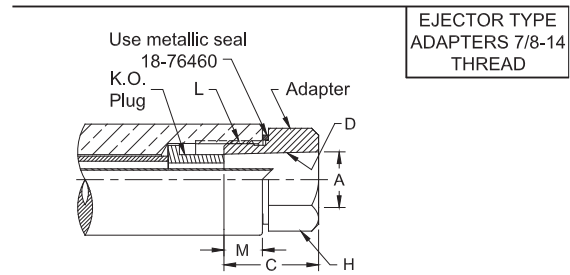


EJECTOR TYPE ADAPTERS 7/8-14 THREAD

EJECTOR TYPE ADAPTERS 1-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia. A					
18-7852	1-14	4 RW	.463	9/16	1-1/4	13/16	18-10060-17	18-78501
18-7862	1-14	5 RW	.625	7/16	1-1/4	1-1/16	18-10060-17	18-7712-3
18-7864	1-14	6 RW	.750	3/4	1-1/4	1-3/4	18-10060-17	18-78650
18-7872	1-14	7 RW	.875	3/4	1-1/4	2-1/8	18-10060-17	18-78701

Use with Threaded Ejector Holder to make Replaceable Taper Holders


Part No.	Female Thd. Size	Barrel Dia.
18-275	1-14	1-1/4
18-276	1-14	1-1/2

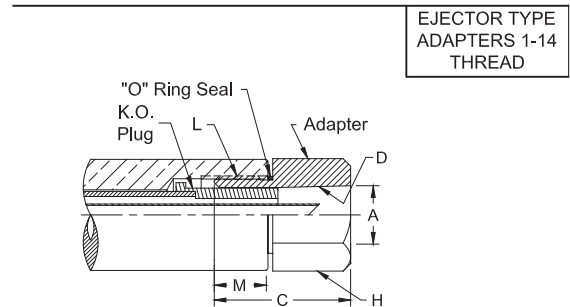

EJECTOR TYPE ADAPTERS 1-14 THREAD



**200 SERIES (EJECTOR) WATER COOLED ELECTRODE HOLDER**

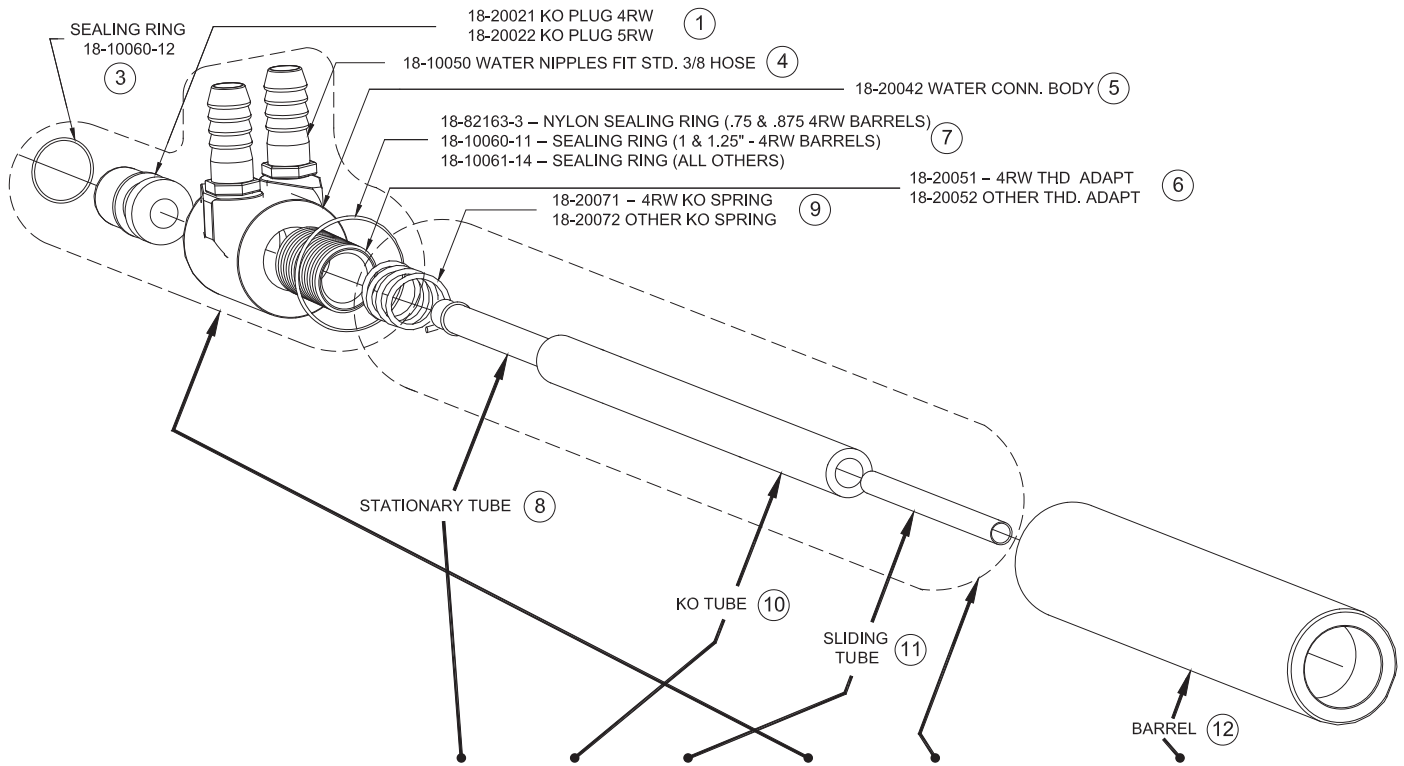

Part No. Holder Assy.	Thread Or Taper	Barrel Length	Stationary Tube 8	K.O. Tube 10	Sliding Tube 11	Water Conn. HD. Sub-Assy. Include Parts: 1 3 4 5 6 7	K.O. Tube Sub-Assy. Include Parts: 8 9 10 11	Barrel Diameter	Barrel 12
18-201 18-202 18-203 18-204	4 RW	3	18-10044-3	18-20031-3	18-10046-3	18-20091	18-20095-3	3/4 7/8 1 1-1/4	18-11110-3 18-11210-3 18-11310-3 18-11410-3
18-206 18-207 18-208	5 RW	3	18-10045-3	18-20032-3	18-10047-3	18-20092	18-20096-3	1 1-1/4 1-1/2	18-11610-3 18-11710-3 18-11810-3
18-211 18-212 18-213 18-214	4 RW	8	18-10044-8	18-20031-8	18-10046-8	18-20091	18-20095-8	3/4 7/8 1 1-1/4	18-11110-8 18-11210-8 18-11310-8 18-11410-8
18-216 18-217 18-218	5 RW	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4 1-1/2	18-11610-8 18-11710-8 18-11810-8
18-219* 18-220*	7 RW	8	18-10045-8	18-20032-58 & 18-20033*	18-10047-8	18-20092	18-20096-58	1-1/4 1-1/2	18-11910-8 18-12010-8
18-231 18-232 18-233 18-234	4 RW	12	18-10044-12	18-20031-12	18-10046-8	18-20091	18-20095-12	3/4 7/8 1 1-1/4	18-11110-12 18-11210-12 18-11310-12 18-11410-12
18-236 18-237 18-238	5 RW	12	18-10045-12	18-20032-12	18-10047-8	18-20092	18-20096-12	1 1-1/4 1-1/2	18-11610-12 18-11710-12 18-11810-12
18-236-18 18-237-18 18-238-18	5 RW	18	18-10045-12	18-20032-18	18-10047-29	18-20092	18-20096-18	1 1-1/4 1-1/2	18-11610-18 18-11710-18 18-11810-18
18-272 18-273 18-274	7/8-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4 1-1/2	18-17210-8 18-17310-8 18-17410-8
18-275 18-276	1-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-17510-8 18-17610-8

\*Must use knockout adapter 18-20033






**300 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDER**

CMW Premium holder barrels are made from high strength CMW<sup>®</sup>3 material, centerless ground within .002" tolerance on diameter and nickel plated to resist wear and assure uniform contact resistance of a low magnitude





300 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-317 18-318	.625	1-1/4 1-1/2	8	5 RW	3/4
18-319* 18-320*	.875	1-1/4 1-1/2		7 RW	1-1/8
18-337 18-338	.625	1-1/4 1-1/2	12	5 RW	3/4
18-339* 18-340*	.875	1-1/4 1-1/2		7 RW	1-1/8

\*Must use knockout adapter 18-20033

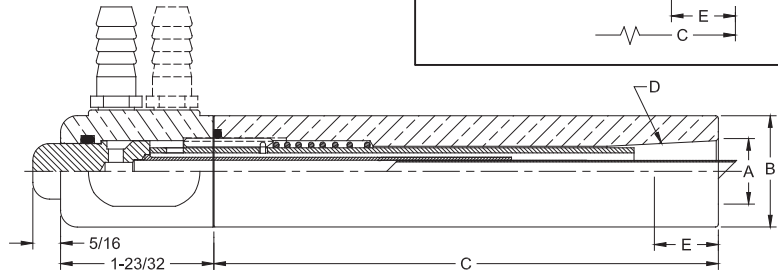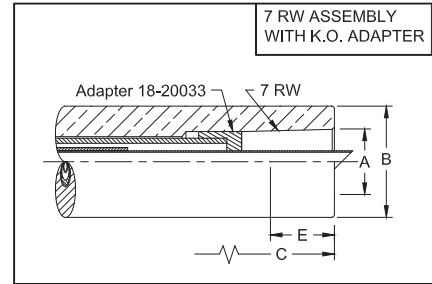

300 SERIES THREADED HOLDER				
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Elect. E
18-372 18-373	1 1-1/4	8	7/8-14	9/16
18-375 18-376	1-1/4 1-1/2		1-14	3/4

300 Series Threaded Holder can use Male Threaded to Female Taper Universal Adapters on page 46.

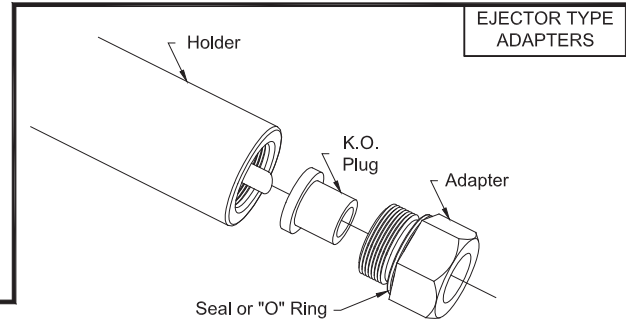


Note: These threaded holder barrels are the same as on 600 series holders on page 44.

**EJECTOR TYPE ADAPTERS**

EJECTOR TYPE ADAPTERS 7/8-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia.					
18-7702	7/8-14	4 RW	.463	5/8	1	13/16	18-76460	18-78501
18-7712	7/8-14	5 RW	.625	1/2	1	1-1/16	18-76460	18-7712-3

Use with Threaded Ejector Holder to make Replaceable Taper Holders


Part No.	Female Thd. Size	Barrel Dia.
18-372	7/8-14	1
18-373	7/8-14	1-1/4

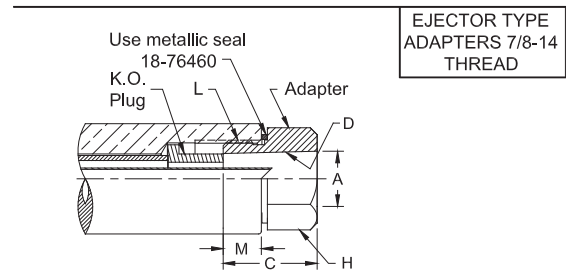

EJECTOR TYPE ADAPTERS 1-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia.					
18-7852	1-14	4 RW	.463	9/16	1-1/4	13/16	18-10060-17	18-78501
18-7862	1-14	5 RW	.625	7/16	1-1/4	1-1/16	18-10060-17	18-7712-3
18-7864	1-14	6 RW	.750	3/4	1-1/4	1-3/4	18-10060-17	18-78650
18-7872	1-14	7 RW	.875	3/4	1-1/4	2-1/8	18-10060-17	18-78701


Use with Threaded Ejector Holder to make Replaceable Taper Holders

Part No.	Female Thd. Size	Barrel Dia.
18-375	1-14	1-1/4
18-376	1-14	1-1/2

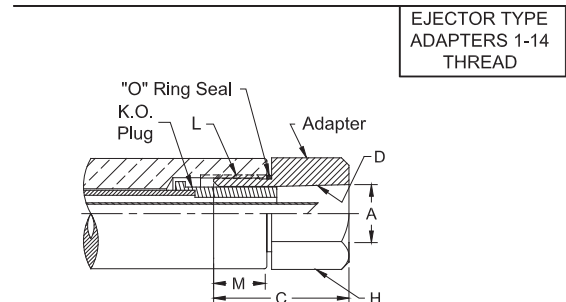



**300 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDER**

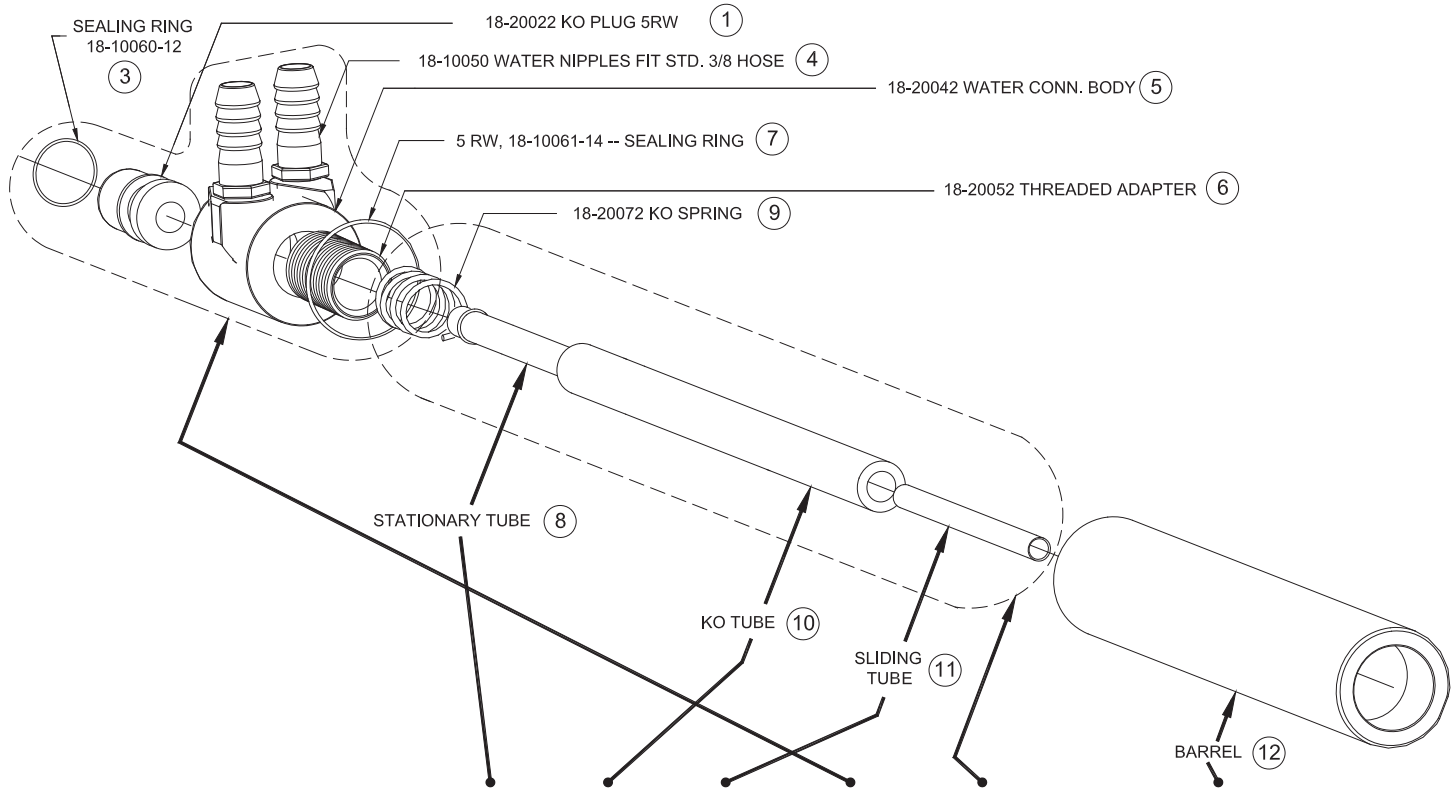

Part No. Holder Assy.	Thread Or Taper	O.A.L	Stationary Tube 8	K.O. Tube 10	Sliding Tube 11	Water Conn. HD. Sub-Assy. Include Parts: 1 3 4 5 6 7	K.O. Tube Sub-Assy. Include Parts: 8 9 10 11	Barrel Diameter	Barrel 12
18-317 18-318	5 RW	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-31710-8 18-31810-8
18-319* 18-320*	7 RW	8	18-10045-8	18-20032-58 & 18-20033*	18-10047-8	18-20092	18-20096-58	1-1/4 1-1/2	18-31910-8 18-32010-8
18-337 18-338	5 RW	12	18-10045-12	18-20032-12	18-10047-8	18-20092	18-20096-12	1-1/4 1-1/2	18-31710-12 18-31810-12
18-339* 18-340*	7 RW	12	18-10045-12	18-20032-62 & 18-20033*	18-10047-8	18-20092	18-20096-62	1-1/4 1-1/2	18-31910-12 18-32010-12
18-372 18-373	7/8-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4	18-37210-8 18-37310-8
18-375 18-376	1-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-37510-8 18-37610-8


\*Must use knockout adapter 18-20033






**COMBINATIONS OF CMW  
HOLDERS, ADAPTERS AND  
ELECTRODES CAN  
PERFORM MOST RESISTANCE  
WELDING APPLICATIONS**

Many of these combinations make possible welding operations that could have been done heretofore only by the use of "expensive and special" holders and electrodes. A few ideas of the many possible combinations are shown for your guidance.

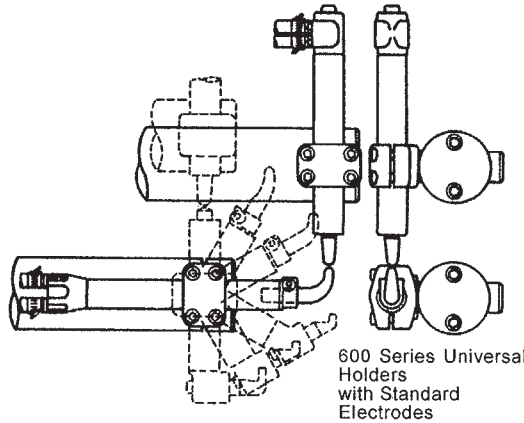


600 Series Universal Holders with Standard Electrodes

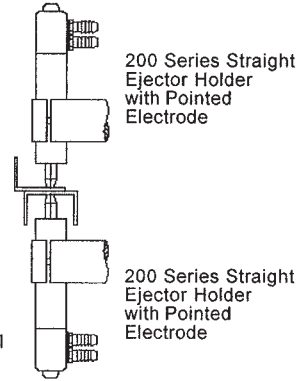


200 Series Straight Ejector Holder with Pointed Electrode


200 Series Straight Ejector Holder with Pointed Electrode




950 Series Paddle Holder with Socket Offset Electrode



950 Series Paddle Holder with Socket Truncated Cone Electrode

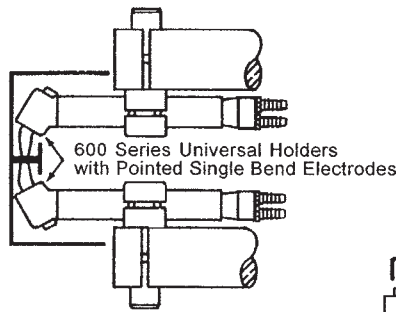


600 Series Universal Holders with Pointed Single Bend Electrodes

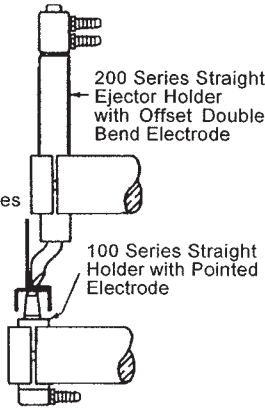


200 Series Straight Ejector Holder with Offset Double Bend Electrode

100 Series Straight Holder with Pointed Electrode

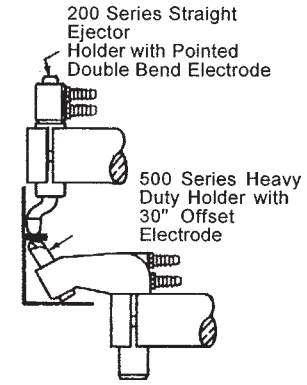


200 Series Straight Ejector Holder with Pointed Double Bend Electrode

500 Series Heavy Duty Holder with 30" Offset Electrode

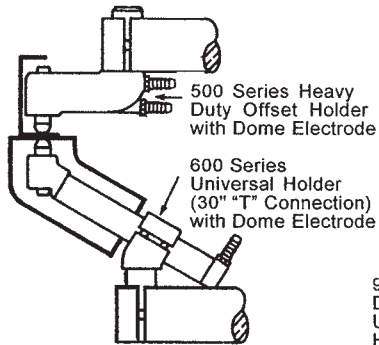


500 Series Heavy Duty Offset Holder with Dome Electrode

600 Series Universal Holder (30" "T" Connection) with Dome Electrode

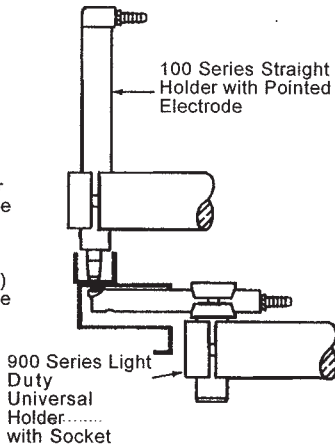


100 Series Straight Holder with Pointed Electrode

900 Series Light Duty Universal Holder..... with Socket




400 Series Light Duty Offset Holders with Pointed Electrodes

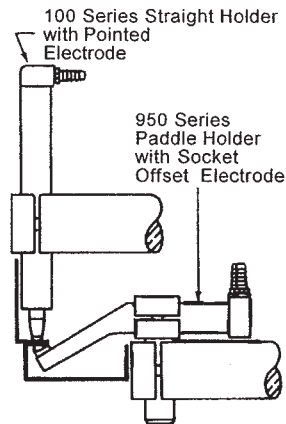


100 Series Straight Holder with Pointed Electrode

950 Series Paddle Holder with Socket Offset Electrode

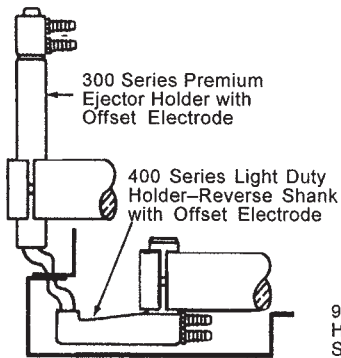


300 Series Premium Ejector Holder with Offset Electrode

400 Series Light Duty Holder-Reverse Shank with Offset Electrode




600 Series Universal Holder with Pointed Electrode

950 Series Paddle Holder with Socket Radius Electrode

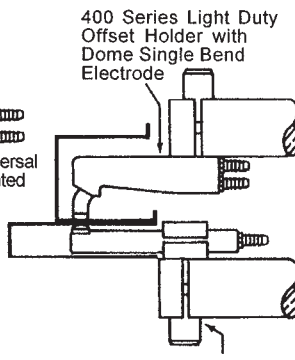

400 Series Light Duty Offset Holder with Dome Single Bend Electrode

900 Series Light Duty Universal Holder with Socket Radius Electrode




100 Series Straight Holder with Pointed Electrode

600 Series Universal Holder with Single Bend Electrode



**400 SERIES OFFSET (NON-EJECTOR) WATER COOLED ELECTRODE HOLDERS**

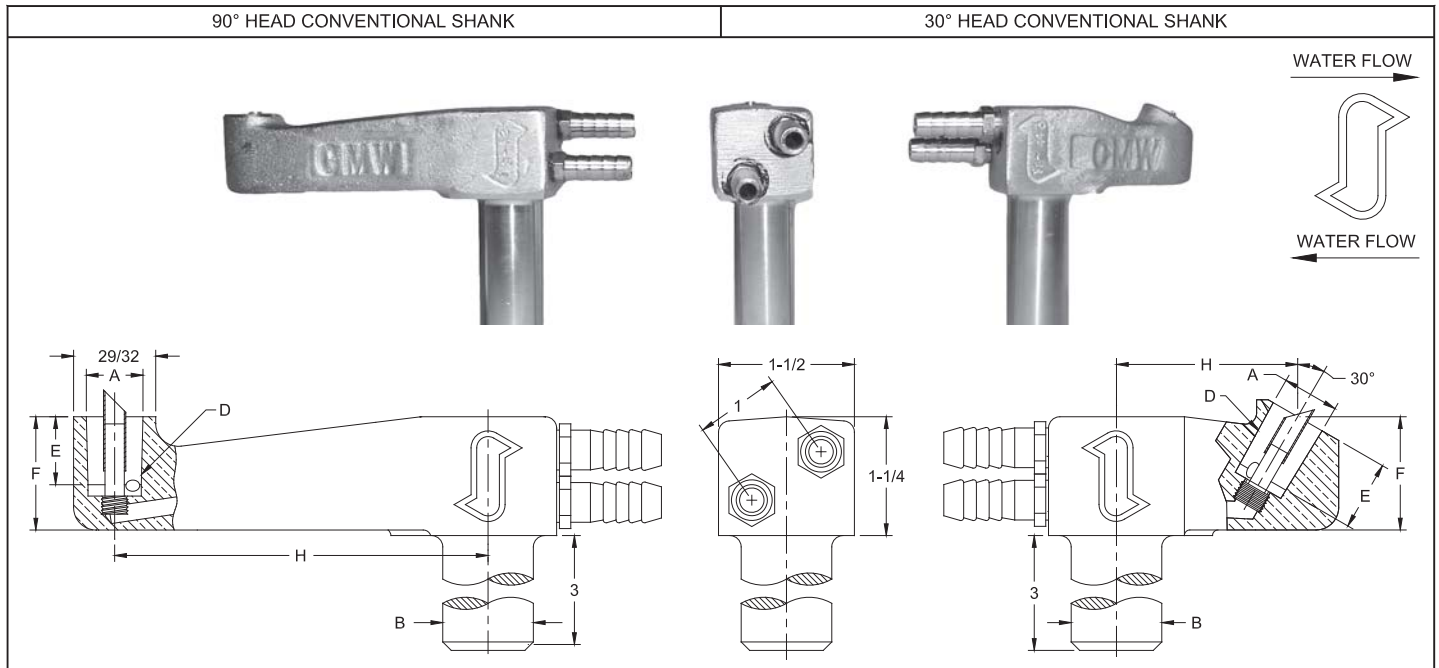

400 SERIES OFFSET HOLDER (CONVENTIONAL SHANK 90°)

Part No. Holder Assy.	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Offset H
18-402 18-403 18-404	.463	7/8 1 1-1/4	4 RW	1/2	1-1/16	2
18-407 18-408 18-409	.625	7/8 1 1-1/4	5 RW	3/4	1-1/4	2
18-422 18-423 18-424	.463	7/8 1 1-1/4	4 RW	1/2	1-1/16	4
18-428 18-429	.625	1 1-1/4	5 RW	3/4	1-1/4	4

\*Other shank diameters and lengths or tapers available on special order


400 SERIES OFFSET HOLDER (CONVENTIONAL SHANK 30°)

Part No. Holder Assy.	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Offset H
18-442 18-443 18-444	.463	7/8 1 1-1/4	4 RW	1/2	1	2
18-448 18-449	.625	1 1-1/4	5 RW	3/4	1-1/4	2
18-462 18-463 18-464	.463	7/8 1 1-1/4	4 RW	1/2	1	4
18-468 18-469	.625	1 1-1/4	5 RW	3/4	1-1/4	4

\*Other shank diameters and lengths or tapers available on special order

**400 SERIES OFFSET (NON-EJECTOR) WATER COOLED ELECTRODE HOLDERS**

90° HEAD REVERSE SHANK

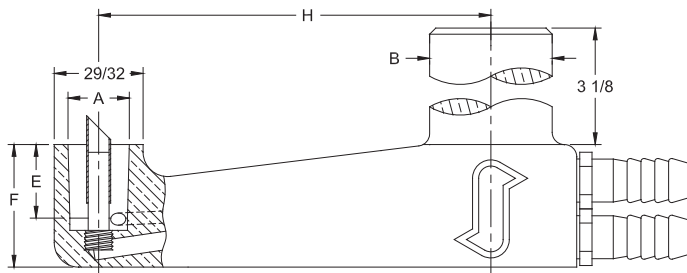

400 SERIES OFFSET HOLDER (REVERSE SHANK 90°)


Part No. Holder Assy.	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Offset H
18-433	.463	1	4 RW	1/2	1-1/16	4
18-439	.625	1-1/4	5 RW	3/4	1-1/4	4

\*Other shank diameters and lengths or tapers available on special order





**400 SERIES OFFSET (NON-EJECTOR) REPLACEMENT PARTS**

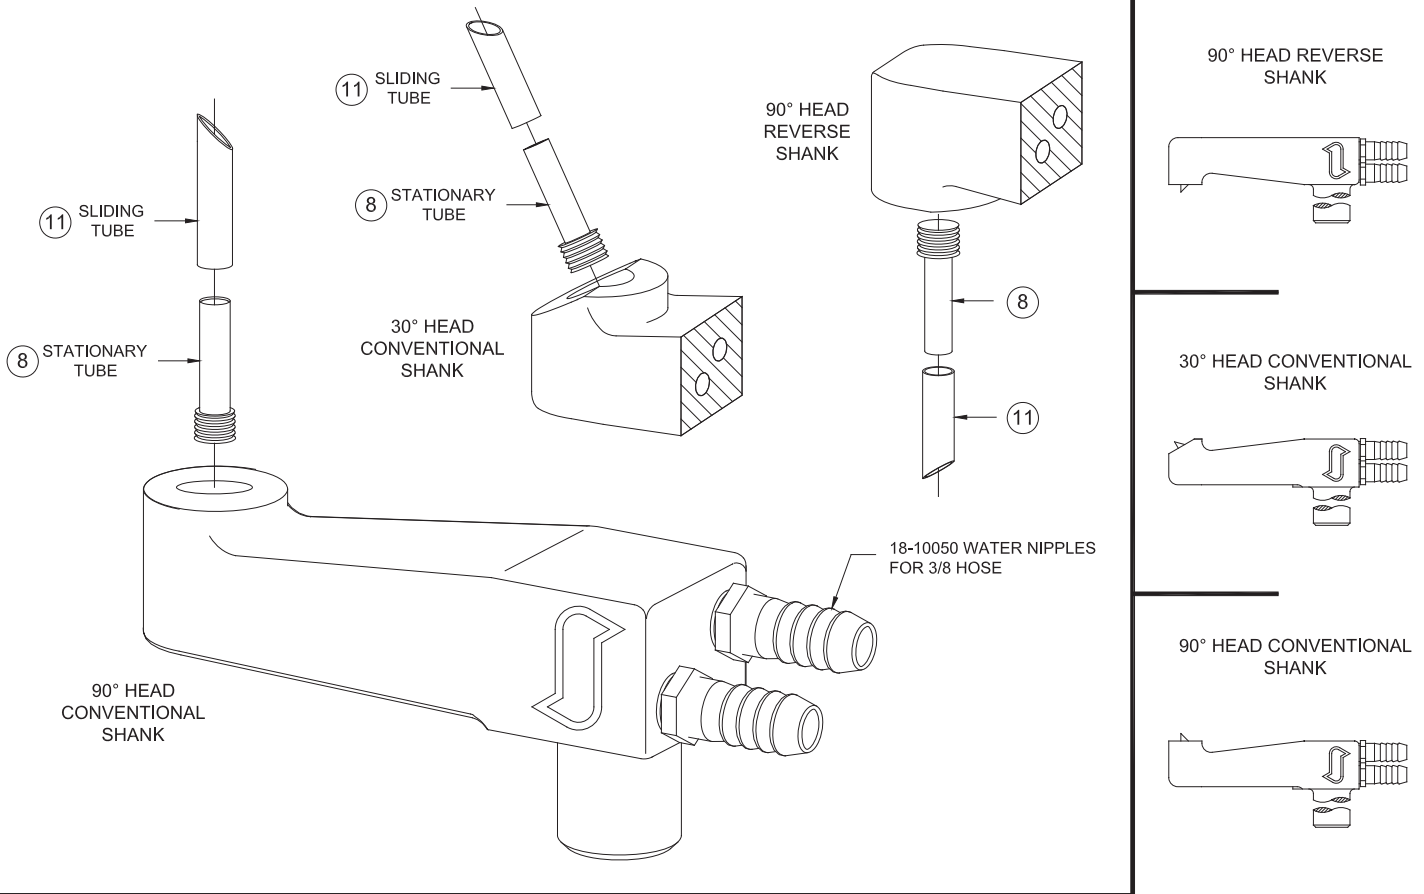


Part No. Holder Assy.	Taper	Angle Of Head	Stationary Tube 8	Sliding Tube 11	Shank Dia.
18-402	4 RW	90°	18-40041-1	18-40043-1	7/8
18-403					1
18-404					1-1/4
18-407	5 RW	90°	18-40041-1	18-40043-2	7/8
18-408					1
18-409					1-1/4
18-422	4 RW	90°	18-40041-1	18-40043-1	7/8
18-423					1
18-424					1-1/4
18-433*					1
18-428	5 RW	90°	18-40041-1	18-40043-2	1
18-429					1-1/4
18-439*					1-1/4
18-442	4 RW	30°	18-40041-1	18-40043-1	7/8
18-443					1
18-444					1-1/4
18-448	5 RW	30°	18-40041-1	18-40043-2	1
18-449					1-1/4
18-462	4 RW	30°	18-40041-1	18-40043-1	7/8
18-463					1
18-464					1-1/4
18-468	5 RW	30°	18-40041-1	18-40043-2	1
18-469					1-1/4

\*Reverse shank



**500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS**

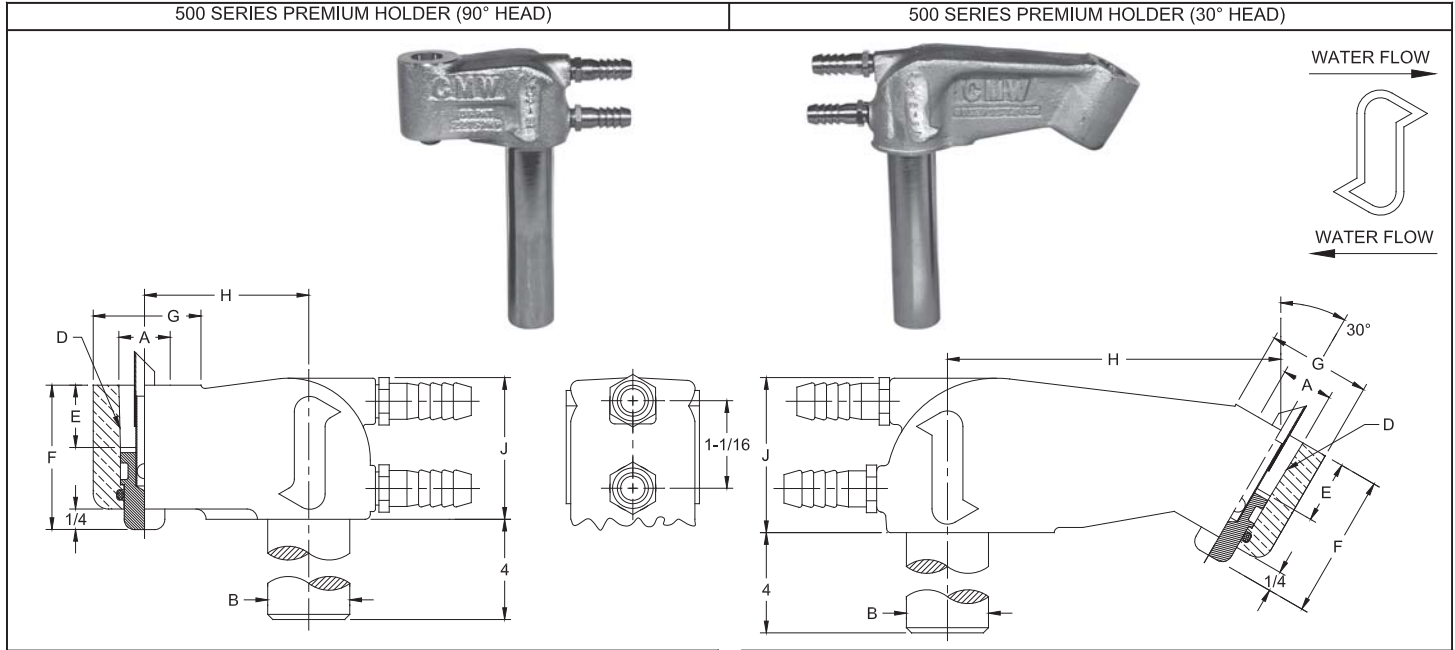

500 SERIES PREMIUM HOLDER (90° HEAD)								
Part No. Holder Assy.	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Head Dia. G	Offset H	Head Thickness J
18-502 18-503 18-504	.625	1 1-1/4 1-1/2	5 RW	3/4	1-13/16	1-1/4	2	1-23/32
18-505 18-506	.875	1-1/4 1-1/2	7 RW	1-1/8	2-7/32	1-1/2	2	1-23/32
18-522 18-523 18-524	.625	1 1-1/4 1-1/2	5 RW	3/4	1-13/16	1-1/4	4	1-7/8
18-525 18-526	.875	1-1/4 1-1/2	7 RW	1-1/8	2-7/32	1-1/2	4	1-7/8

500 SERIES PREMIUM HOLDER (30° HEAD)								
Part No. Holder Assy.	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Head Dia. G	Offset H	Head Thickness J
18-562 18-563 18-564	.625	1 1-1/4 1-1/2	5 RW	3/4	1-13/16	1-5/16	4	1-7/8
18-565 18-566	.875	1-1/4 1-1/2	7 RW	1-1/8	2-7/32	1-9/16	4	1-7/8


\*Other shank diameters and lengths or tapers available on special order

\*Other shank diameters and lengths or tapers available on special order

**500 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDERS WITH THREADED ADAPTERS**

500 SERIES PREMIUM HOLDER WITH THREADED ADAPTERS										
Part No. Holder Assy.	Head Angle	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Head Dia. G	Offset H	Head Thickness J	Part No. Threaded Adapter
18-5035 18-5036	90°	.625 .750	1-1/4	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	2	1-23/32	18-7875 18-7876
18-5045 18-5046	90°	.625 .750	1-1/2	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	2	1-23/32	18-7875 18-7876
18-5235 18-5236	90°	.625 .750	1-1/4	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	4	1-7/8	18-7875 18-7876
18-5245 18-5246	90°	.625 .750	1-1/2	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	4	1-7/8	18-7875 18-7876
18-5635 18-5636	30°	.625 .750	1-1/4	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	4	1-7/8	18-7875 18-7876
18-5645 18-5646	30°	.625 .750	1-1/2	5 RW 6 RW	3/4 7/8	1-13/16 1-15/16	1-1/4	4	1-7/8	18-7875 18-7876


\*Other shank diameters and lengths or tapers available on special order

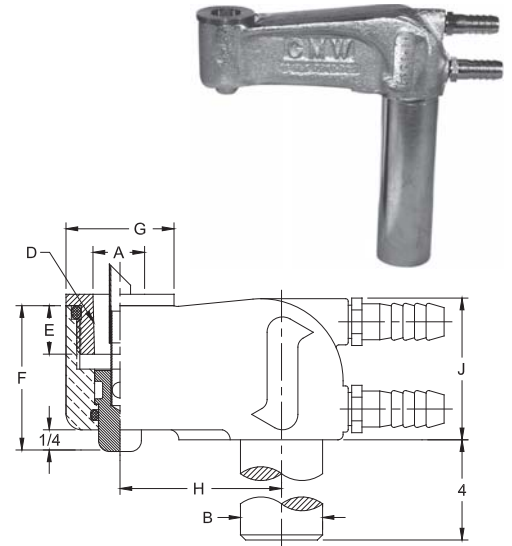






**500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS**

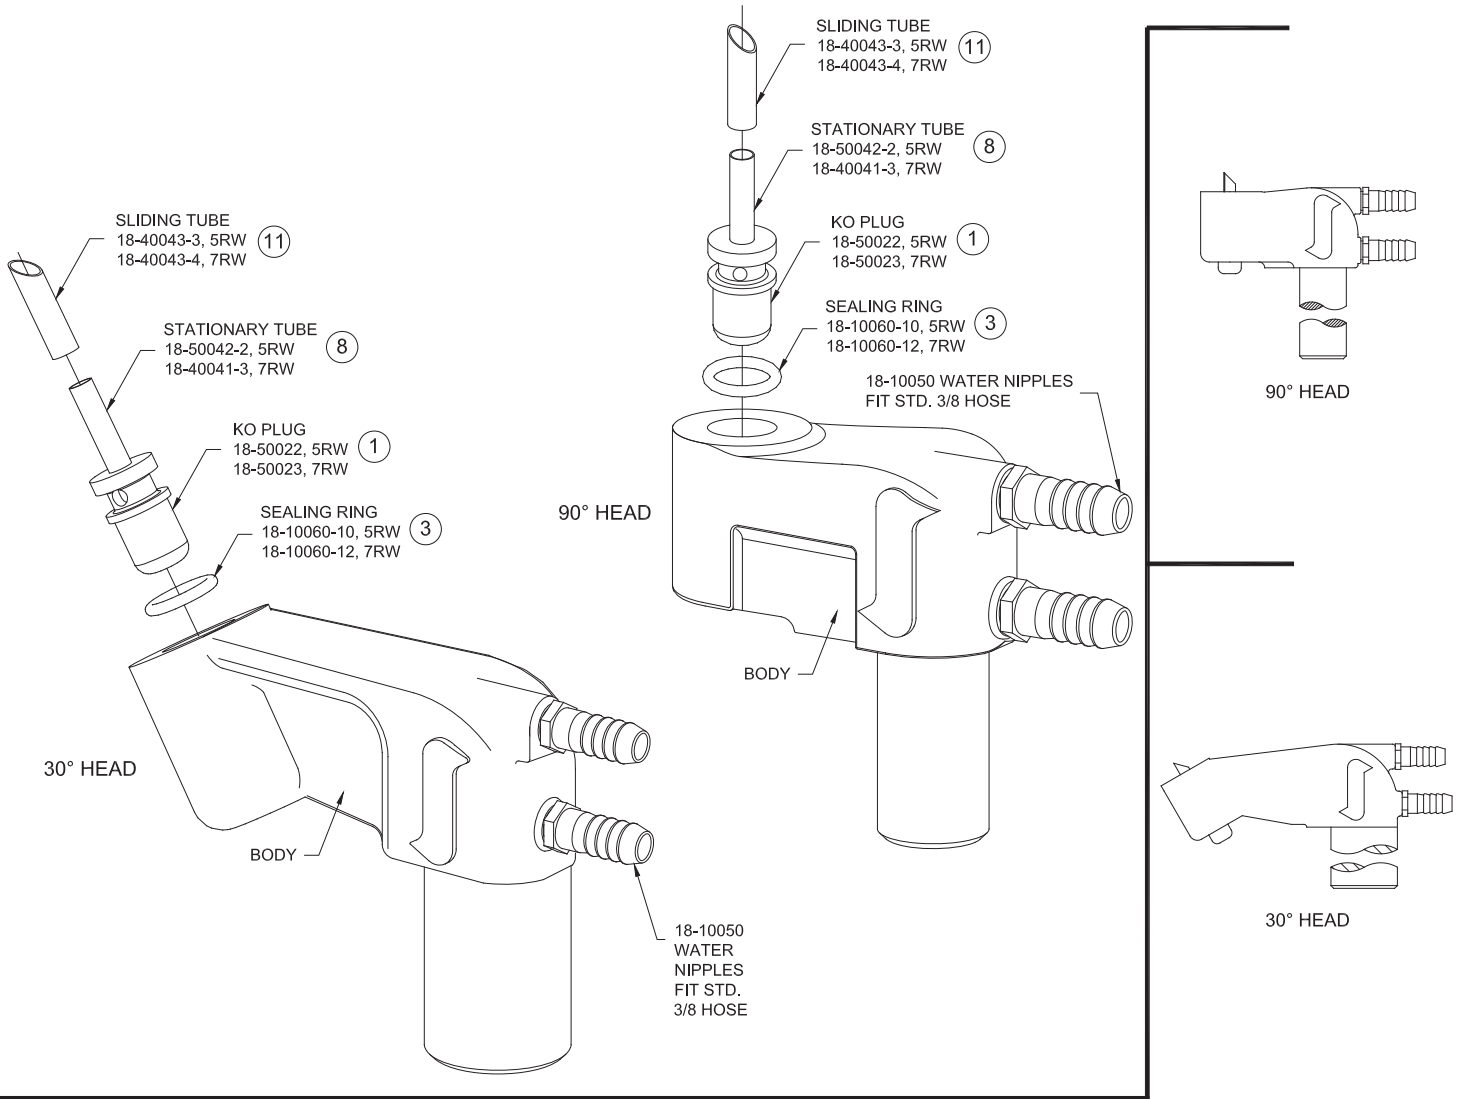

Part No. Holder Assy.	Taper	Angle Of Head	KO Plug 1	Sealing Ring 3	Stationary Tube 8	Sliding Tube 11	Shank Dia.
18-502 18-503 18-504	5 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1 1-1/4 1-1/2
18-505 18-506	7 RW	90°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4 1-1/2
18-522 18-523 18-524	5 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1 1-1/4 1-1/2
18-525 18-526	7 RW	90°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4 1-1/2
18-562 18-563 18-564	5 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1 1-1/4 1-1/2
18-565 18-566	7 RW	30°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4 1-1/2



**500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS WITH THREADED ADAPTER**

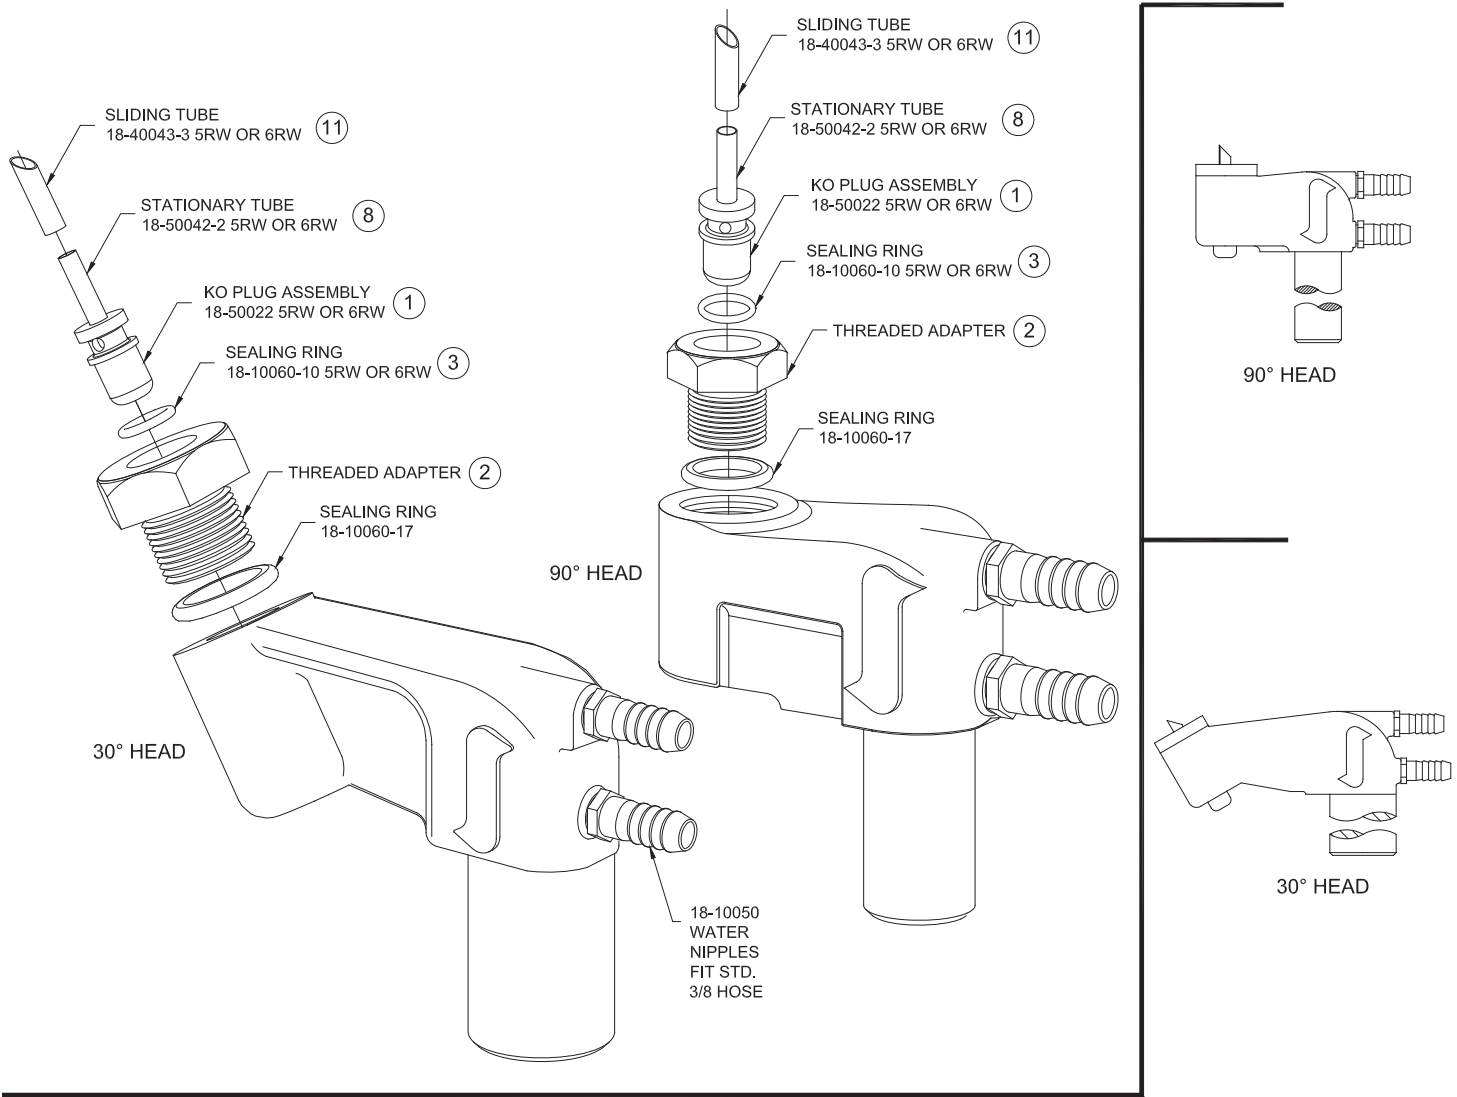

Part No. Holder Assy.	Taper	Angle Of Head	KO Plug ** 1	Sealing Ring 3	Stationary Tube 8	Sliding Tube 11	Shank Dia.	Threaded Adapter* 2
18-5035 18-5036	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5045 18-5046	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876
18-5235 18-5236	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5245 18-5246	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876
18-5635 18-5636	5 RW 6 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5645 18-5646	5 RW 6 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876




\* Threaded adapter includes sealing ring 18-10060-17

\*\* KO Plug assembly includes stationary tube 18-50042-2



**600 SERIES UNIVERSAL WATER COOLED ELECTRODE HOLDERS**

EXAMPLE: This is shown with standard 90° adapter head and 600 series water connector body 18-74001 "Type A"

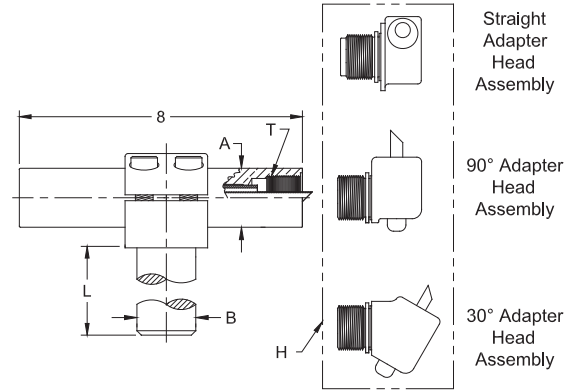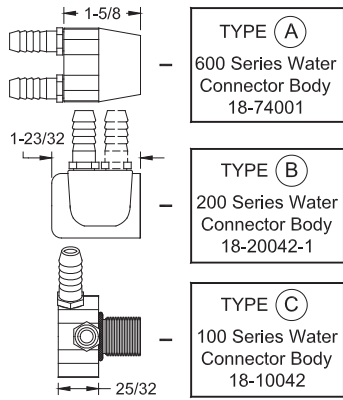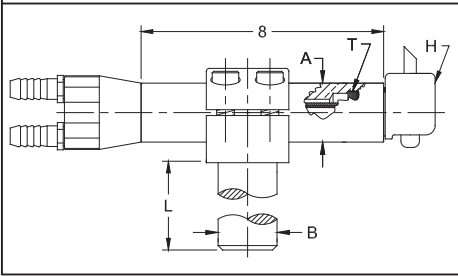

\*Standard holders include type "A" water connector, types "B" and "C" available on request  
See page 46 for adapter head details and page 47 for additional "T" connector information.

600 SERIES UNIVERSAL HOLDER (90° ADAPTER HEAD)							
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T	
18-601 18-603	4 RW	1	7/8	3	18-764	7/8-14	
18-605 18-607		1-1/4	1-1/4	3-1/2	18-764	7/8-14	
18-611 18-613	5 RW	1	7/8	3	18-766	7/8-14	
18-615 18-617		1-1/4	1-1/4	3-1/2	18-766	7/8-14	
18-651 18-657		1-1/4	1-1/4	3-1/2	18-780	1-14	
18-655 18-653		1-1/2	1-1/4	4	18-780	1-14	
18-661 18-665		7 RW	1-1/4	1-1/4	3-1/2	18-782	1-14
18-663			1-1/2	1-1/4	4		


600 SERIES UNIVERSAL HOLDER (STRAIGHT ADAPTER HEAD)						
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-621 18-622	4 RW	1	7/8	3	18-768	7/8-14
18-623 18-671		1-1/4	1-1/4	3-1/2	18-768	7/8-14
18-624 18-674	5 RW	1-1/4	1-1/2	4	18-768	7/8-14
18-672		1-1/2	1-1/2	4	18-784	1-14
18-673		1-1/2	1-1/4	4		



600 SERIES UNIVERSAL HOLDER (30° ADAPTER HEAD)							
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T	
18-602 18-604	4 RW	1	7/8	3	18-765	7/8-14	
18-606 18-608		1-1/4	1-1/4	3-1/2	18-765	7/8-14	
18-612 18-614	5 RW	1	7/8	3	18-767	7/8-14	
18-616 18-618		1-1/4	1-1/4	3-1/2	18-767	7/8-14	
18-652 18-658		1-1/4	1-1/4	3-1/2	18-781	1-14	
18-656 18-654		1-1/2	1-1/4	4	18-781	1-14	
18-662 18-666		7 RW	1-1/4	1-1/4	3-1/2	18-783	1-14
18-664			1-1/2	1-1/4	4		

**600 SERIES UNIVERSAL WATER COOLED ELECTRODE HOLDER (THREADED ADAPTER HEAD)**


600 SERIES UNIVERSAL HOLDER (THREADED ADAPTER HEAD)							
Part No. Holder Assy.*	Taper	Head Angle	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-6515 18-6535	5 RW	90°	1-1/4	1-1/4	3-1/2	18-7805	1-14
18-6525 18-6545		30°	1-1/4	1-1/4	3-1/2	18-7815	1-14
18-6516 18-6536	6 RW	90°	1-1/4	1-1/4	3-1/2	18-7806	1-14
18-6526 18-6546		30°	1-1/4	1-1/4	3-1/2	18-7816	1-14

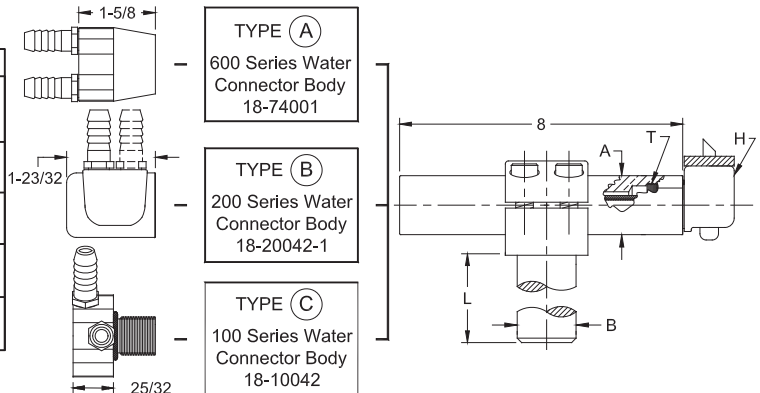

\*Standard holders include type "A" water connector, types "B" and "C" available on request



**600 SERIES UNIVERSAL WATER COOLED OFFSET HOLDERS**

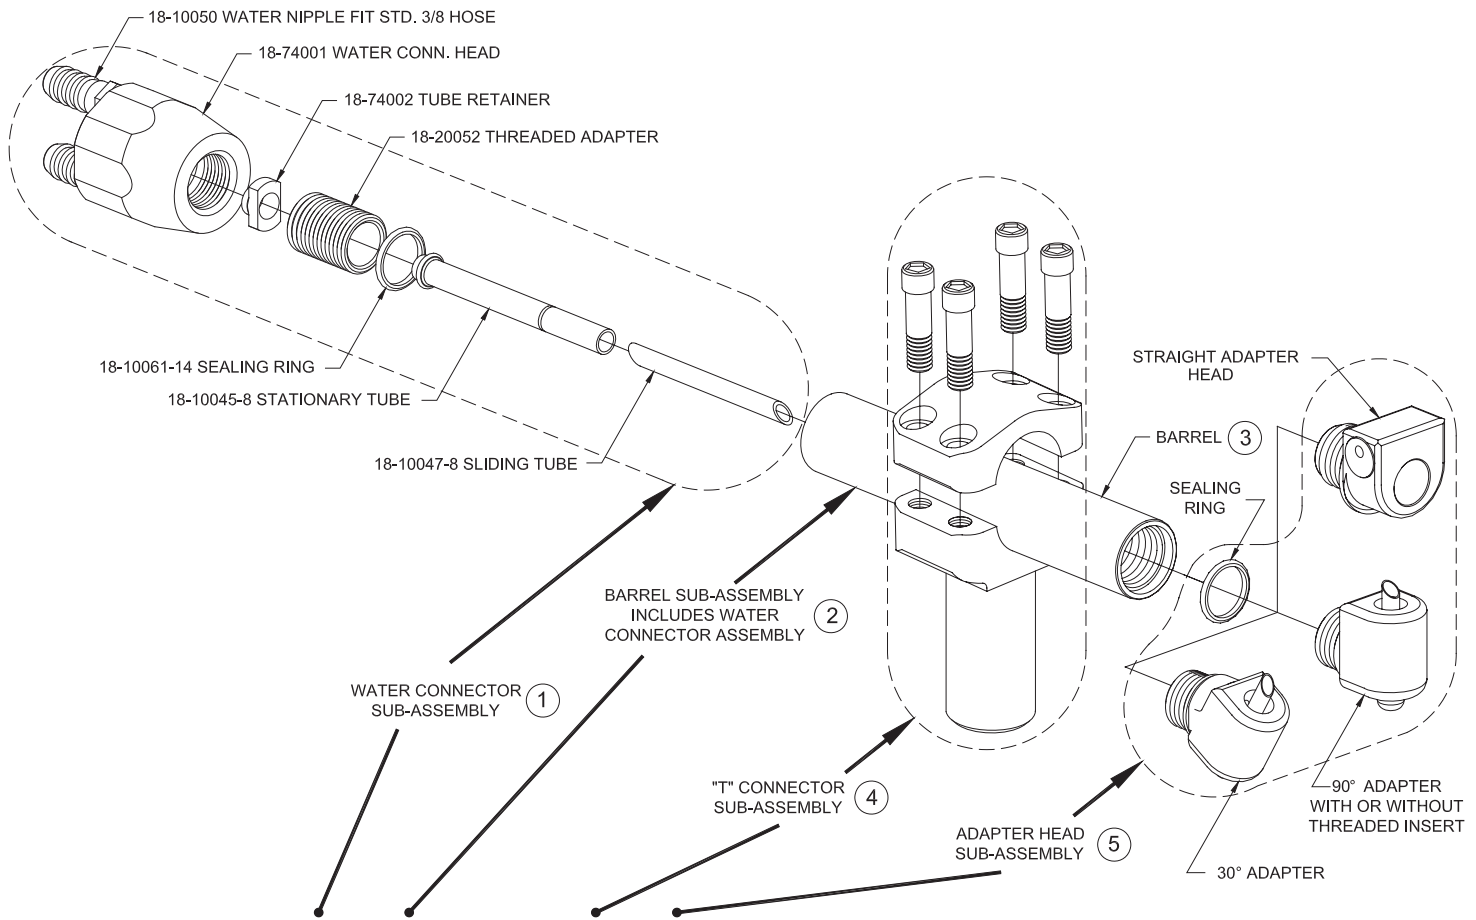

Part No. Holder Assy.	Taper	Angle Of Head	Water Conn. Assy. 1	Barrel Assy. 2	Barrel 3	"T" Conn. Assy. * 4	Adapter Head Assy.* 5
18-601 18-602	4 RW	90°	18-74000-8	18-701	18-37210-8	18-725	18-764 18-765
		30°					
18-603 18-604		90°	18-74000-8				
		30°					
18-605 18-606	5 RW	90°	18-74000-8	18-702	18-37310-8	18-727	18-764 18-765
		30°					
18-607 18-608		90°	18-74000-8				
		30°					
18-611 18-612	5 RW	90°	18-74000-8	18-701	18-37210-8	18-725	18-766 18-767
		30°					
18-613 18-614		90°	18-74000-8				
		30°					
18-615 18-616	5 RW	90°	18-74000-8	18-702	18-37310-8	18-727	18-766 18-767
		30°					
18-617 18-618		90°	18-74000-8				
		30°					
18-621 18-622	7 RW	STR. STR.	18-74000-8	18-701	18-37210-8	18-725 18-726	18-768
		STR. STR.					
18-623 18-624		STR. STR.	18-74000-8	18-702	18-37310-8	18-727 18-730	18-768
18-651 18-652		90°	18-74000-8	18-704	18-37510-8	18-727	18-780 18-781
	30°						
18-657 18-658	90°	18-74000-8			18-730	18-780 18-781	

Part No. Holder Assy.	Taper	Angle Of Head	Water Conn. Assy.* 1	Barrel Assy. 2	Barrel 3	"T" Conn. Assy. * 4	Adapter Head Assy.* 5
18-655 18-656	5 RW	90°	18-74000-8	18-705	18-37610-8	18-728	18-780 18-781
		30°					
18-653 18-654		90°	18-74000-8				
		30°					
18-671 18-672	5 RW THD.	STR. STR.	18-74000-8	18-704 18-705	18-37510-8 18-37610-8	18-727 18-729	18-784
		STR. STR.					
18-673 18-674		STR. STR.	18-74000-8	18-705 18-704	18-37610-8 18-37510-8	18-728 18-730	18-784
		STR. STR.					
18-6515 18-6525	6 RW THD.	90°	18-74000-8	18-704	18-37510-8	18-727	18-7805 18-7815
		30°					
18-6535 18-6545		90°	18-74000-8	18-705	18-37610-8	18-729	18-7805 18-7815
		30°					
18-6516 18-6526	6 RW THD.	90°	18-74000-8	18-704	18-37510-8	18-727	18-7806 18-7816
		30°					
18-6536 18-6546		90°	18-74000-8	18-705	18-37610-8	18-729	18-7806 18-7816
		30°					
18-661 18-662	7 RW	90°	18-74000-8	18-704	18-37510-8	18-727	18-782 18-783
		30°					
18-665 18-666		90°	18-74000-8	18-705	18-37610-8	18-728	18-782 18-783
		30°					
18-663 18-664	90°	18-74000-8	18-705	18-37610-8	18-729	18-782 18-783	
	30°						


\* See page 46 for adapter head details and page 47 for additional "T" connector information.






**MALE THREAD TO FEMALE TAPER UNIVERSAL ADAPTERS**


**MALE THREAD TO FEMALE TAPER 90° TYPE**

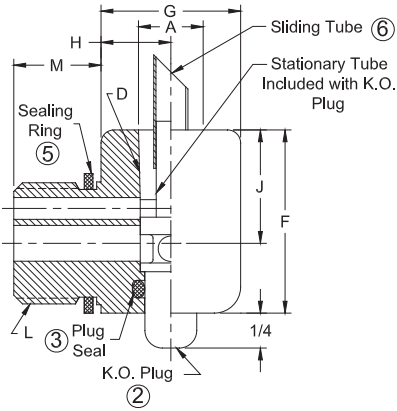


**MALE THREAD TO FEMALE TAPER 90° TYPE (ADAPT WITH INSERT)**

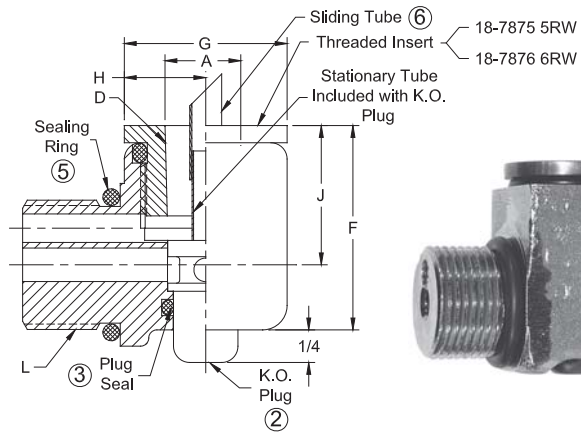

**MALE THREAD TO FEMALE TAPER 30° TYPE**

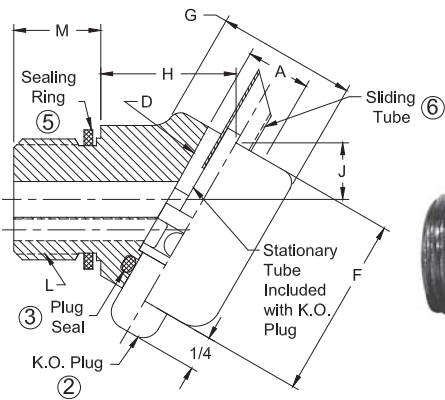

**MALE THREAD TO FEMALE TAPER STRAIGHT TYPE**

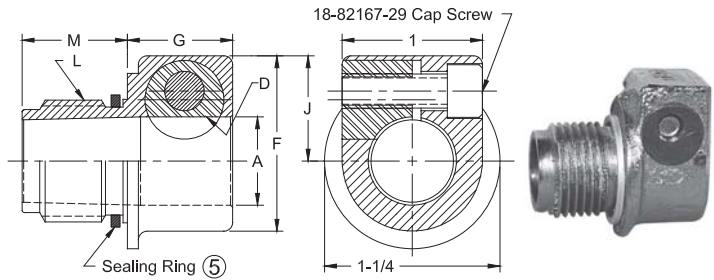

**MALE THREAD TO FEMALE TAPER UNIVERSAL ADAPTERS**

Adapter Part No.	Adapter Angle	Male Thread		Female Taper		Overall Head Height F	Head Diameter or Length G	End Barrel to C.L. of Taper H	C.L. Barrel to C.L. of Taper J	K.O. Plug Part No. 2	K.O. Plug Seal Ring Part No. 3	Sealing Ring Part No. 5	Sliding Tube Part No. 6
		Thread Size L	Length M	Taper Size D	Major Dia. A								
18-764	90°	7/8-14	9/16	4 RW	.463	1-9/16	1	19/32	13/16	18-50021	18-10060-8	18-76460	18-50041-1
18-765	30°	7/8-14	9/16	4 RW	.463	1-9/16	1	1-1/16	15/32	18-50021	18-10060-8	18-76460	18-50041-1
18-766	90°	7/8-14	9/16	5 RW	.625	1-13/16	1	19/32	1-1/16	18-50022	18-10060-10	18-76460	18-40043-3
18-767	30°	7/8-14	9/16	5 RW	.625	1-13/16	1-1/16	1-11/32	53/64	18-50022	18-10060-10	18-76460	18-40043-3
18-768	Str.	7/8-14	9/16	5 RW	.625	1-1/4	3/4	--	3/4	--	--	18-76460	--
18-780	90°	1-14	3/4	5 RW	.625	1-13/16	1-1/4	21/32	1-1/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-781	30°	1-14	3/4	5 RW	.625	1-13/16	1-5/16	1-3/8	13/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-784	Str.	1-14	3/4	5 RW	.625	1-1/4	3/4	--	3/4	--	--	18-10060-17	--
18-782	90°	1-14	3/4	7 RW	.875	2-3/16	1-1/2	25/32	1-3/16	18-50023	18-10060-12	18-10060-17	18-40043-4
18-783	30°	1-14	3/4	7 RW	.875	2-3/16	1-9/16	1-3/8	13/16	18-50023	18-10060-12	18-10060-17	18-40043-4
18-7805*	90°	1-14	3/4	5 RW	.625	1-13/16	1-1/4	21/32	1-1/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-7815*	30°	1-14	3/4	5 RW	.625	1-13/16	1-5/16	1-3/8	13/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-7806*	90°	1-14	3/4	6 RW	.750	1-15/16	1-1/4	21/32	1-3/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-7816*	30°	1-14	3/4	6 RW	.750	1-15/16	1-5/16	1-7/16	59/64	18-50022	18-10060-10	18-10060-17	18-40043-3


\*These adapters have threaded inserts 18-7875 (5RW) or 18-7876 (6RW) taper




**"T" CONNECTORS FOR HOLDERS**

90° HEAVY DUTY "T" CONNECTORS

30° HEAVY DUTY "T" CONNECTORS

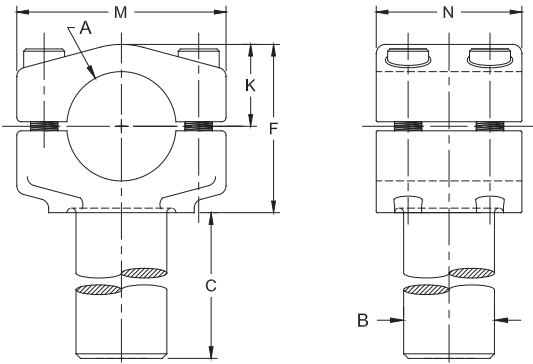

Available as cast  
CMW<sup>®</sup>353  
material

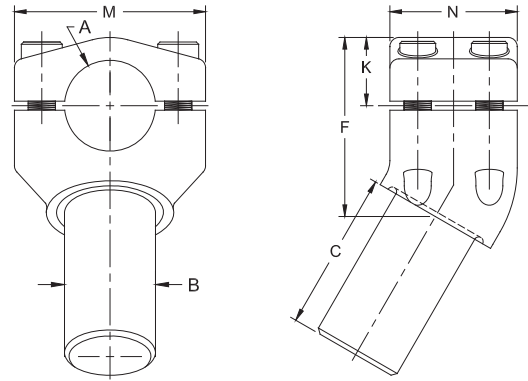

HEAVY DUTY 90° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B*	Shank Length C	Head Height F	Hole C.L. Over Top K	Length M	Width N	Number of Bolts
18-725 18-726	1	7/8 1	3	1-3/4	3/4	2-5/16	1-1/2	2 Bolt
18-727 18-728	1-1/4 1-1/2	1-1/4	3-1/2 4	2 2-5/16	15/16 1-1/8	2-5/8 2-7/8	1-3/4 2	4 Bolt
18-729 18-730	1-1/2 1-1/4	1-1/2	4	2-5/16	1-1/8	2-7/8	2	4 Bolt

HEAVY DUTY 30° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B	Shank Length C	Head Height F	Hole C.L. Over Top K	Length M	Width N	Number of Bolts
18-731 18-732	1	7/8 1	3	2	3/4	2-5/16	1-1/2	2 Bolt
18-733 18-734	1-1/4 1-1/2	1-1/4 1-1/2	3-1/2 4	2-13/32 2-47/64	15/16 1-1/8	2-5/8 2-7/8	1-3/4 2	4 Bolt

These 30° "T" Connectors may be interchanged with the 90° universal type "T" Connectors. See page 38 for suggested setups.


"T" Connectors of other shank diameters and lengths may be ordered upon request.

Available as cast CMW<sup>®</sup>3 material

SMALL BARREL 90° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B	Shank Length C	Head Height F	Hole C.L. Over Top K	Dia. M	Number of Bolts
18-720 18-721	3/4	3/4 7/8	3	1-1/4	5/8	1-1/2	1 Bolt
18-722 18-723 18-724		1 1-1/4 1-1/2					

"T" Connectors of other shank diameters and lengths may be ordered upon request.

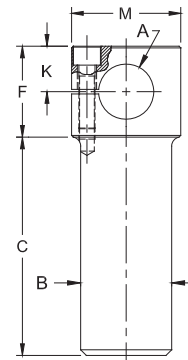




**800 SERIES "NU-TWIST"® ADAPTERS**

**CMW "NU-TWIST"® FEATURES**

1. Hex locking nut may be tightened or loosened effectively by hand or wrench for easy replacement of electrodes.
2. "O" ring seals provide water tight connections.
3. Double groove construction in bore or locking nut accurately aligns and locks the

4. Through use of baffles in adapters and in electrodes over 1" long efficient cooling is effectively achieved.
5. All components are of corrosion-resistant alloys.
6. Maintenance costs are unusually low.
7. Adapter bases are CMW®3 material.

**SURFACE MOUNTED ADAPTERS**

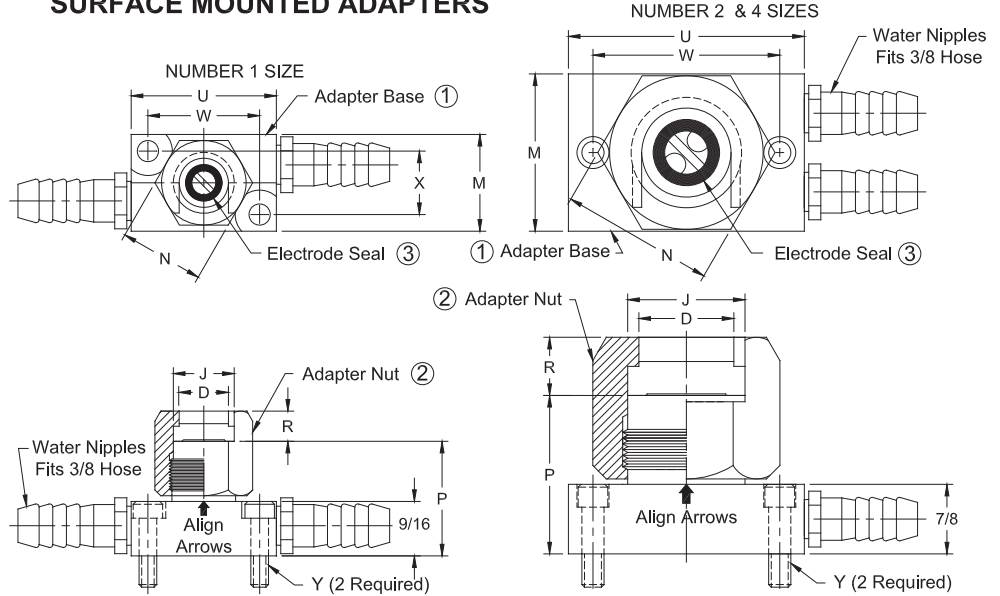

800 SERIES "NU-TWIST"® SURFACE MOUNTED											
Size	Adapter Part No.	Adapter Size									
		D	J	M	N	P	R	U	W	X	Y
1	18-801	1/2	5/8	1	7/8	1-1/4	1/4	1-1/2	1-5/32	21/32	No. 10-24 Scr.
2	18-802	15/16	1-1/8	1-1/2	1-1/2	1-13/16	7/16	2-1/2	2	--	No. 1/4-20 Scr.
4	18-804	1-7/16	1-5/8	2	2	1-13/16	7/16	3	2-3/8	--	No. 1/4-20 Scr.

REPLACEMENT PARTS				
Adapter Part No.	Water Nipples	Adapter Base 1	Adapter Nut 2	Electrode Seals 3
18-801		18-80110	18-80150	18-10060-5
18-802	18-10050	18-80210	18-80250	18-10060-1
18-804		18-80410	18-80450	18-10061-14

For replacement parts see page 49

**800 SERIES "NU-TWIST"® THREADED ADAPTERS & MOUNTING INFORMATION**

May use with 100, 200, and 300 series holders to make "NU-TWIST"® holders

**NUMBER 1 SIZE**

① Adapter Base    ② Adapter Nut    ③ Electrode Seal

**NUMBER 2 & 4 SIZES**

Mounting Seal    ① Adapter Base    ② Adapter Nut    ③ Electrode Seal

800 SERIES "NU-TWIST"® THREADED									
Size	Adapter Part No.	Adapter Size							
		D	J	M	N	P	R	S	T (Thread)
1	18-811	1/2	5/8	1	7/8	15/16	1/4	9/16	5/8-18
2	18-812	15/16	1-1/8	1-1/2	1-1/2	1-5/16	7/16	3/4	1-14
4	18-814	1-7/16	1-5/8	2	2	1-5/16	7/16	3/4	1-1/2-12

For replacement parts see page 49


**NUMBER 1 SIZE**

**NUMBER 2 & 4 SIZES**

MOUNTING INFORMATION FOR THREADED ADAPTERS							
Size	Thd. Adapter Assy. No.	C'bore Dia. A	C'bore Depth B	Thread Depth Min. C	Tube Height E	Tube Dia. F	Thread T
1	18-811	.750	.083	5/8	3/8	.244	5/8-18
2	18-812	1.126	.113	13/16	15/16	.244	1-14
4	18-814	1.626	.173	13/16	15/16	.375	1-1/2-12



800 SERIES "NU-TWIST"<sup>®</sup> THREADED ADAPTERS

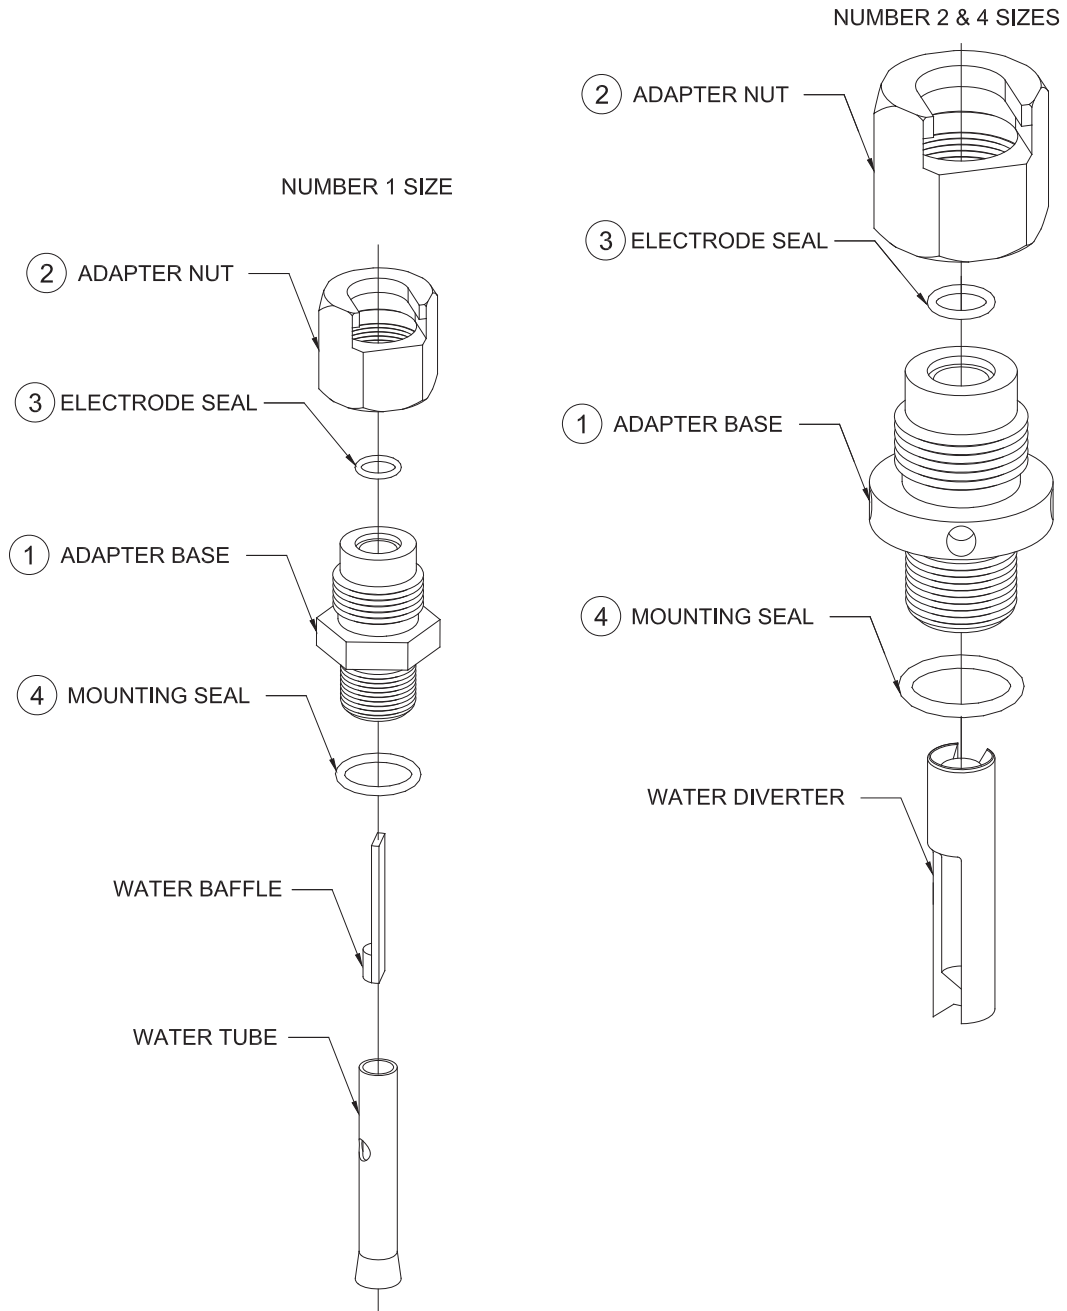


Adapter Assembly Part No.	Adapter Base* 1	Adapter Nut 2	Electrode Seal 3	Mounting Seal 4
18-811	18-81110	18-80150	18-10061-5	18-10060-11
18-812	18-81210	18-80250	18-10061-10	18-10060-17
18-814	18-81410	18-80450	18-10061-14	18-10060-25

\* Adapter base includes water tube & baffel or water diverter





**"NU-TWIST"® ELECTRODES**

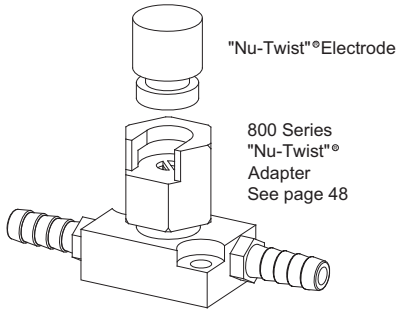

- No tapers or threads
- Can be extracted with a simple turn of hexagon locking nut
- Any contour in electrode face can be located or relocated in a given position
- Water circulated to end of electrode for maximum cooling
- Silver plated contact surfaces on electrode and base for maximum conductivity
- Provides a simple, low-cost electrode for most applications
- Electrodes shown can be modified with contours to provide faces required for most resistance welding applications

FLAT FACE "NU-TWIST"® ELECTRODE				TYPE 0 FLAT & 0 TRUNCATED "NU-TWIST"® ELECTRODE							
Size	Type	Electrode Part No.		Body Dia.	Weld Face Dia.	Overall Length	Adapter Clearance	Water Hole Dia.	Water Hole Depth	Electrode Seat Dia.	Elect. Ext. From Adapt.
		CMW°3	CMW°100	H	A	C	E	F	G	J	K
1	0 Flat	338750 338030	538750 538030	1/2 1/2	1/2 1/2	3/4 1-1/2	-- --	1/4 1/4	3/8 1-1/8	.625 .625	1/2 1-1/4
1	0 Trunc.	378750 378030	578750 578030	1/2 1/2	1/4 1/4	3/4 1-1/2	-- --	1/4 1/4	3/8 1-1/8	.625 .625	1/2 1-1/4
1	Flat	338751 338031	538751 538031	5/8 5/8	5/8 5/8	3/4 1-1/2	5/16 5/16	1/4 1/4	3/8 1-1/8	.625 .625	1/2 1-1/4
2	Flat	338012 338052	538012 538052	1-1/4 1-1/4	1-1/4 1-1/4	1 2	5/8 5/8	1/2 1/2	1/2 1-1/2	1.125 1.125	1/2 1-1/2
4	Flat	338014 338054	538014 538054	1-3/4 1-3/4	1-3/4 1-3/4	1 2	5/8 5/8	3/4 3/4	1/2 1-1/2	1.625 1.625	1/2 1-1/2

Special face contours, lengths and diameters available on special order

**THREADED SOCKET(OR BUTTON) ELECTRODES**

(USE WITH 900 AND 950 SERIES HOLDERS ON PAGE 51)

ALL DIMENSIONS WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

FLAT FACE	TRUNCATED FACE	RADIUS FACE	OFFSET FACE	30° OFFSET FACE
<p>CMW°28 18-970 CMW°3 18-980 CMW°100 18-990</p>	<p>CMW°28 18-971 CMW°3 18-981 CMW°100 18-991</p>	<p>CMW°28 18-972 CMW°3 18-982 CMW°100 18-992</p>	<p>CMW°28 18-973 CMW°3 18-983 CMW°100 18-993</p>	<p>CMW°28 18-974 CMW°3 18-984 CMW°100 18-994</p>



**MALE THREADED BUTTON ELECTRODES**

CMW shall supply a variety of nose configurations (examples shown below) made to your specifications. These electrodes are available in CMW°100, CMW°28 and CMW°3 materials to meet your various applications. Threads in both Unified (inch) or metric sizes can be supplied.






**900 SERIES LIGHT DUTY WATER COOLED UNIVERSAL HOLDER**

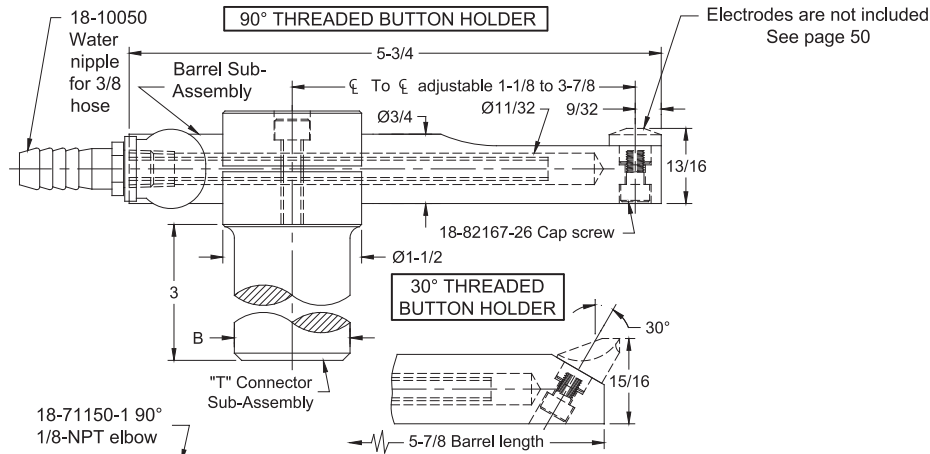


Holder Type	Holder Assembly Part No.	Holder Angle	Shank Dia. B	Barrel Sub-Assy.	Barrel	"T" Conn.
Threaded Button	18-901	90°	3/4	18-709	18-70910-1	18-720
	18-902	30°	3/4	18-710	18-71010-1	18-720
	18-903	90°	7/8	18-709	18-70910-1	18-721
	18-904	30°	7/8	18-710	18-71010-1	18-721
	18-905	90°	1	18-709	18-70910-1	18-722
	18-906	30°	1	18-710	18-71010-1	18-722
	18-907	90°	1-1/4	18-709	18-70910-1	18-723
	18-908	30°	1-1/4	18-710	18-71010-1	18-723
	18-909	90°	1-1/2	18-709	18-70910-1	18-724
	18-900	30°	1-1/2	18-710	18-71010-1	18-724

**950 SERIES WATER COOLED PADDLE HOLDERS FOR THREADED BUTTON ELECTRODES**

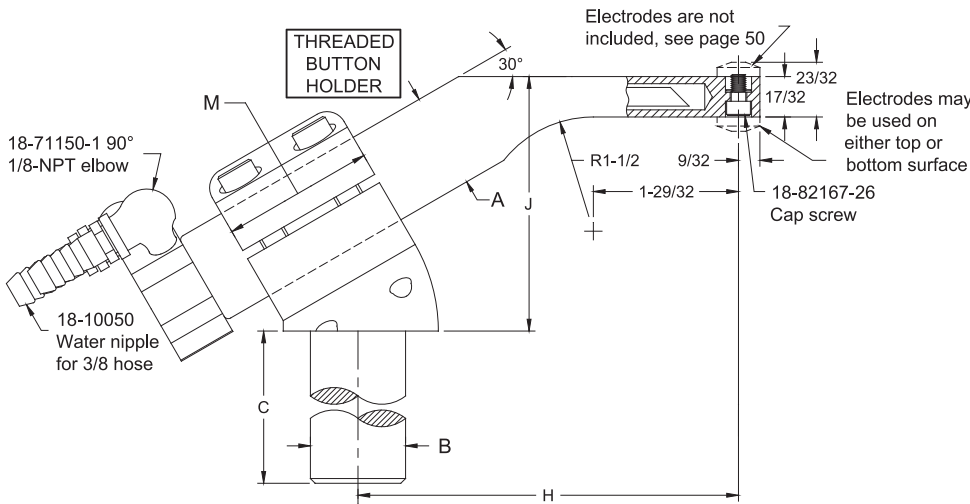

Holder Type	Holder Assembly Part No.	Barrel Dia. A	Shank Dia. B	Shank Length C	Offset Range H	Height Range J	Width M	Barrel Sub-Assy.	"T" Conn.
Threaded Button	18-952	1	7/8	3	3-3/8 to 5-3/32	2-1/16 to 3-1/16	1-1/2	18-713	18-731
	18-953	1	1	1				18-713	18-732
	18-954	1-1/4	1-1/4	3-1/2	4 to 5-23/32	2-3/4 to 3-3/4	1-3/4	18-714	18-733
	18-955	1-1/2	1-1/2	4	4-7/32 to 5-15/16	2-7/8 to 3-7/8	2	18-715	18-734

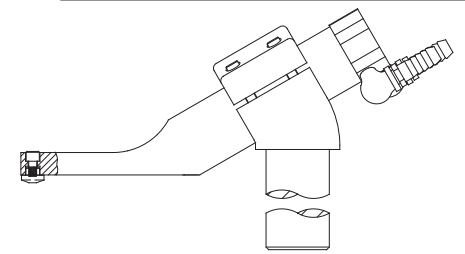



VIEW IS SHOWING BARREL SUB-ASSY AND ELECTRODE REVERSED IN SHANK




**HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES**

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

18-826 #1 SIZE UNIT WITH NU-TWIST® SHOWN

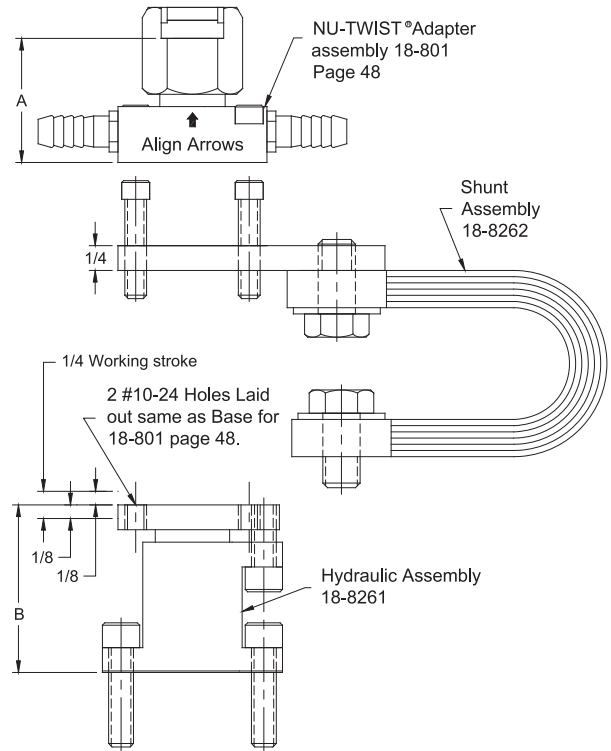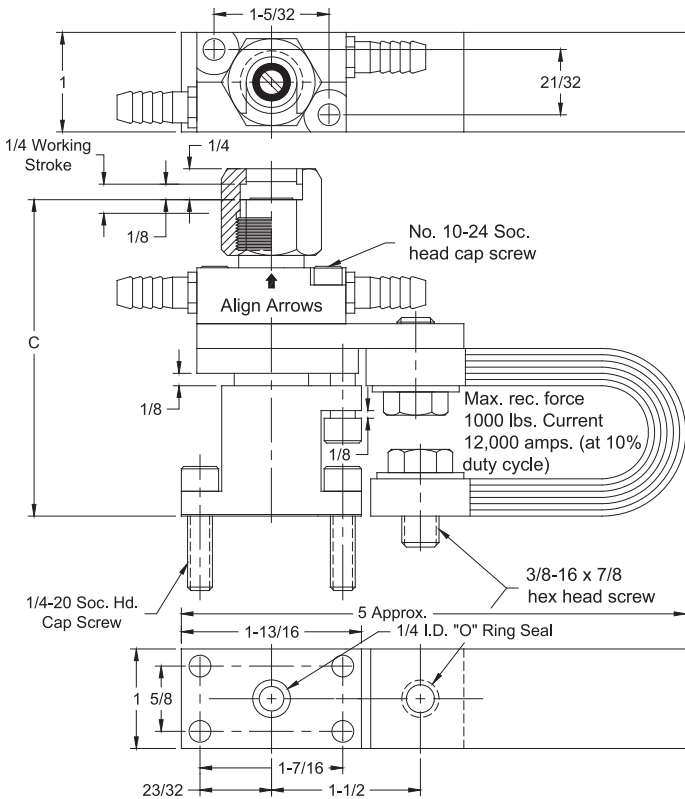



Complete Unit Part No.	Unit Size.	Electrode Attachment	Included Tapered Adapters	Height A	Mean Height B	Mean Electrode Engagement Height C
18-826	#1	NU-TWIST®	--	1-1/4		3-13/64
18-82650	#1	1/2-14 Pipe Thd.	--	1-1/2		3-29/64
18-82651	#1 with adapters	5 RW Male cap	18-7465-07	1-59/64	1-43/64	3-7/8
18-82652		4 RW	18-746-07	1-51/64		3-3/4
18-82653		5 RW	18-747-07	1-51/64		3-3/4

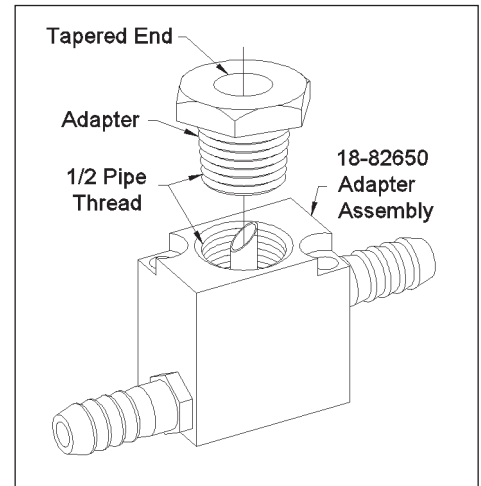



## HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES

18-826 COMPLETE #1 SIZE "NU-TWIST"® ASSEMBLY

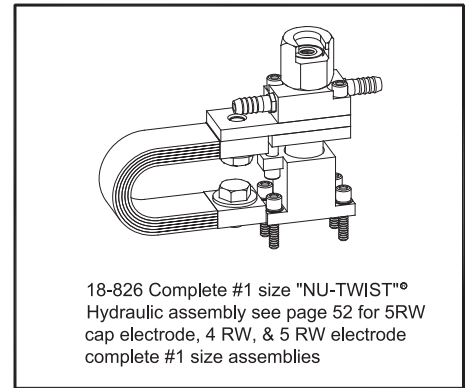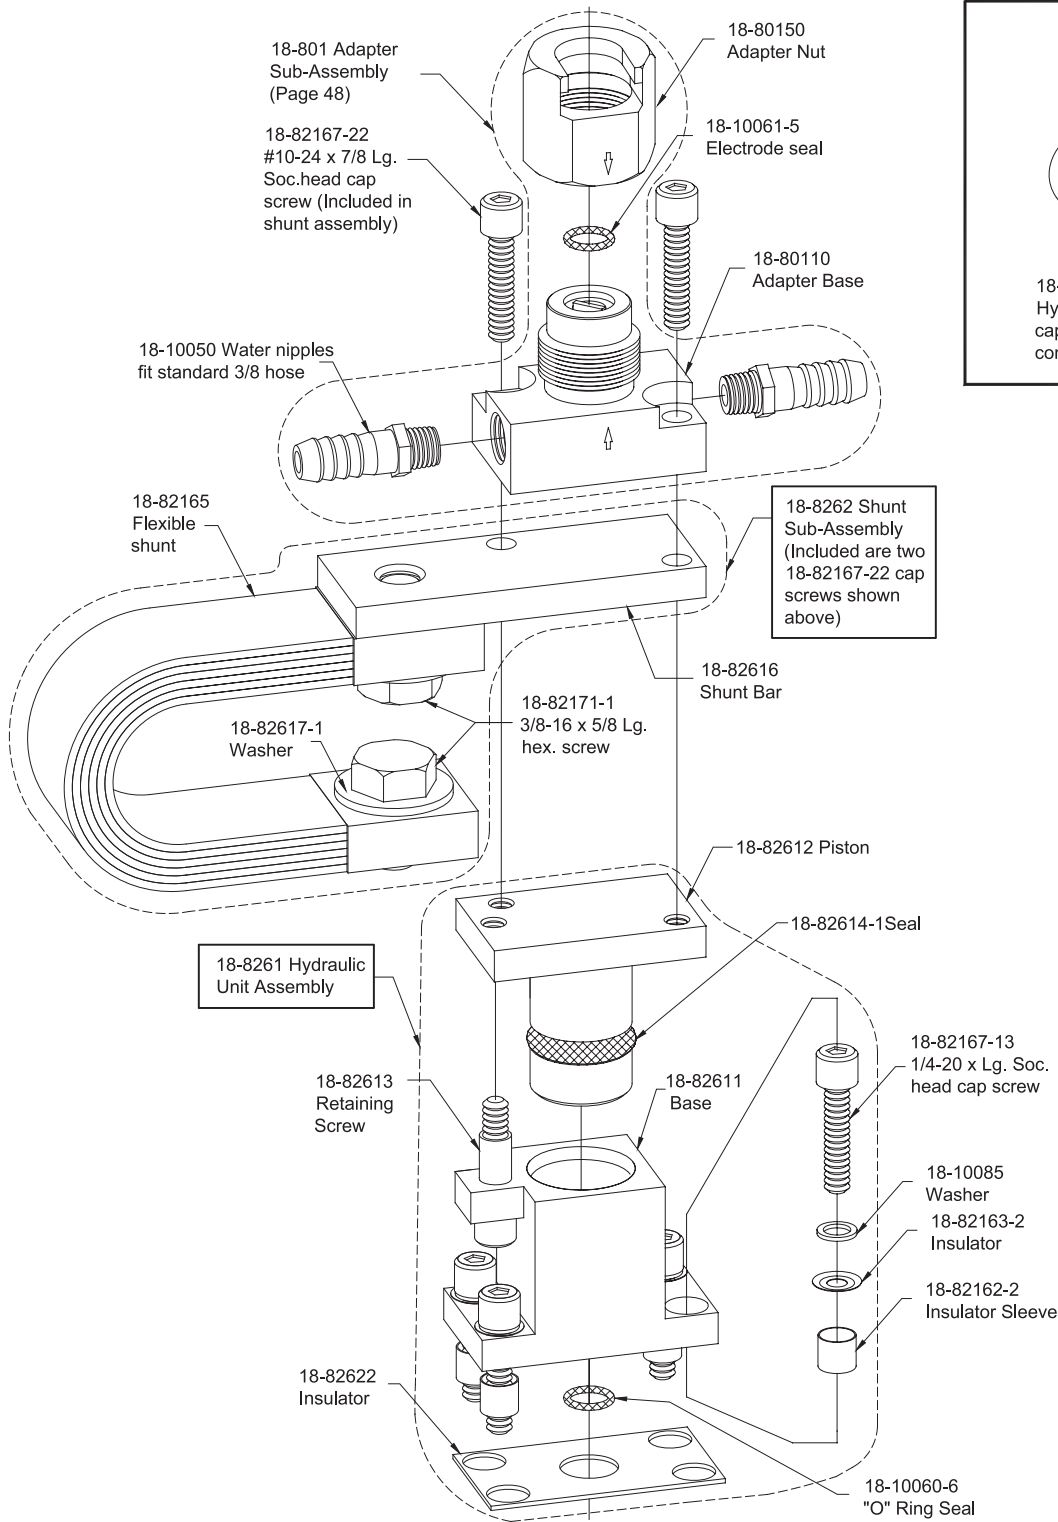







**HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES**

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

**18-827 #2 SIZE UNIT WITH "NU-TWIST"® SHOWN**

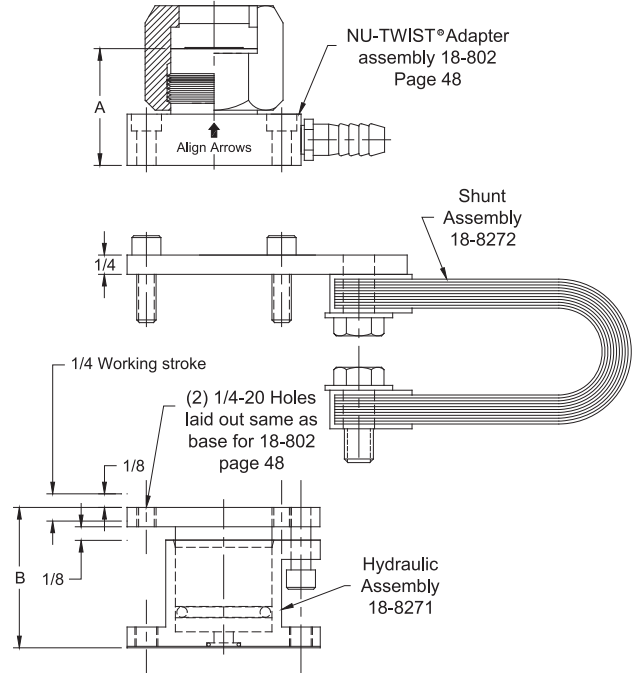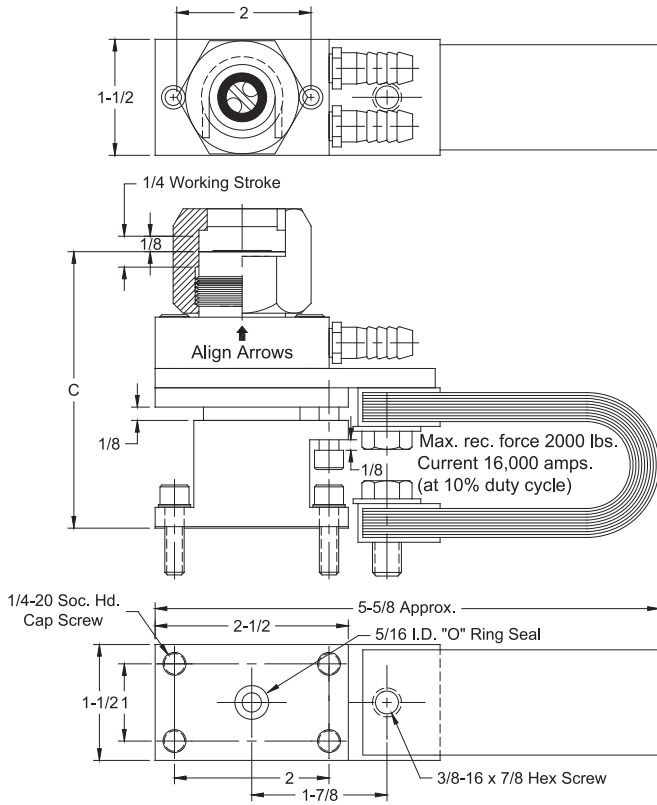


Complete Unit Part No.	Unit Size.	Electrode Attachment	Height A	Mean Height B	Mean Electrode Base Height C
18-827	#2	NU-TWIST	1-13/16	1-49/64	3-53/64



## HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES

18-827 COMPLETE #2 SIZE "NU-TWIST" ASSEMBLY

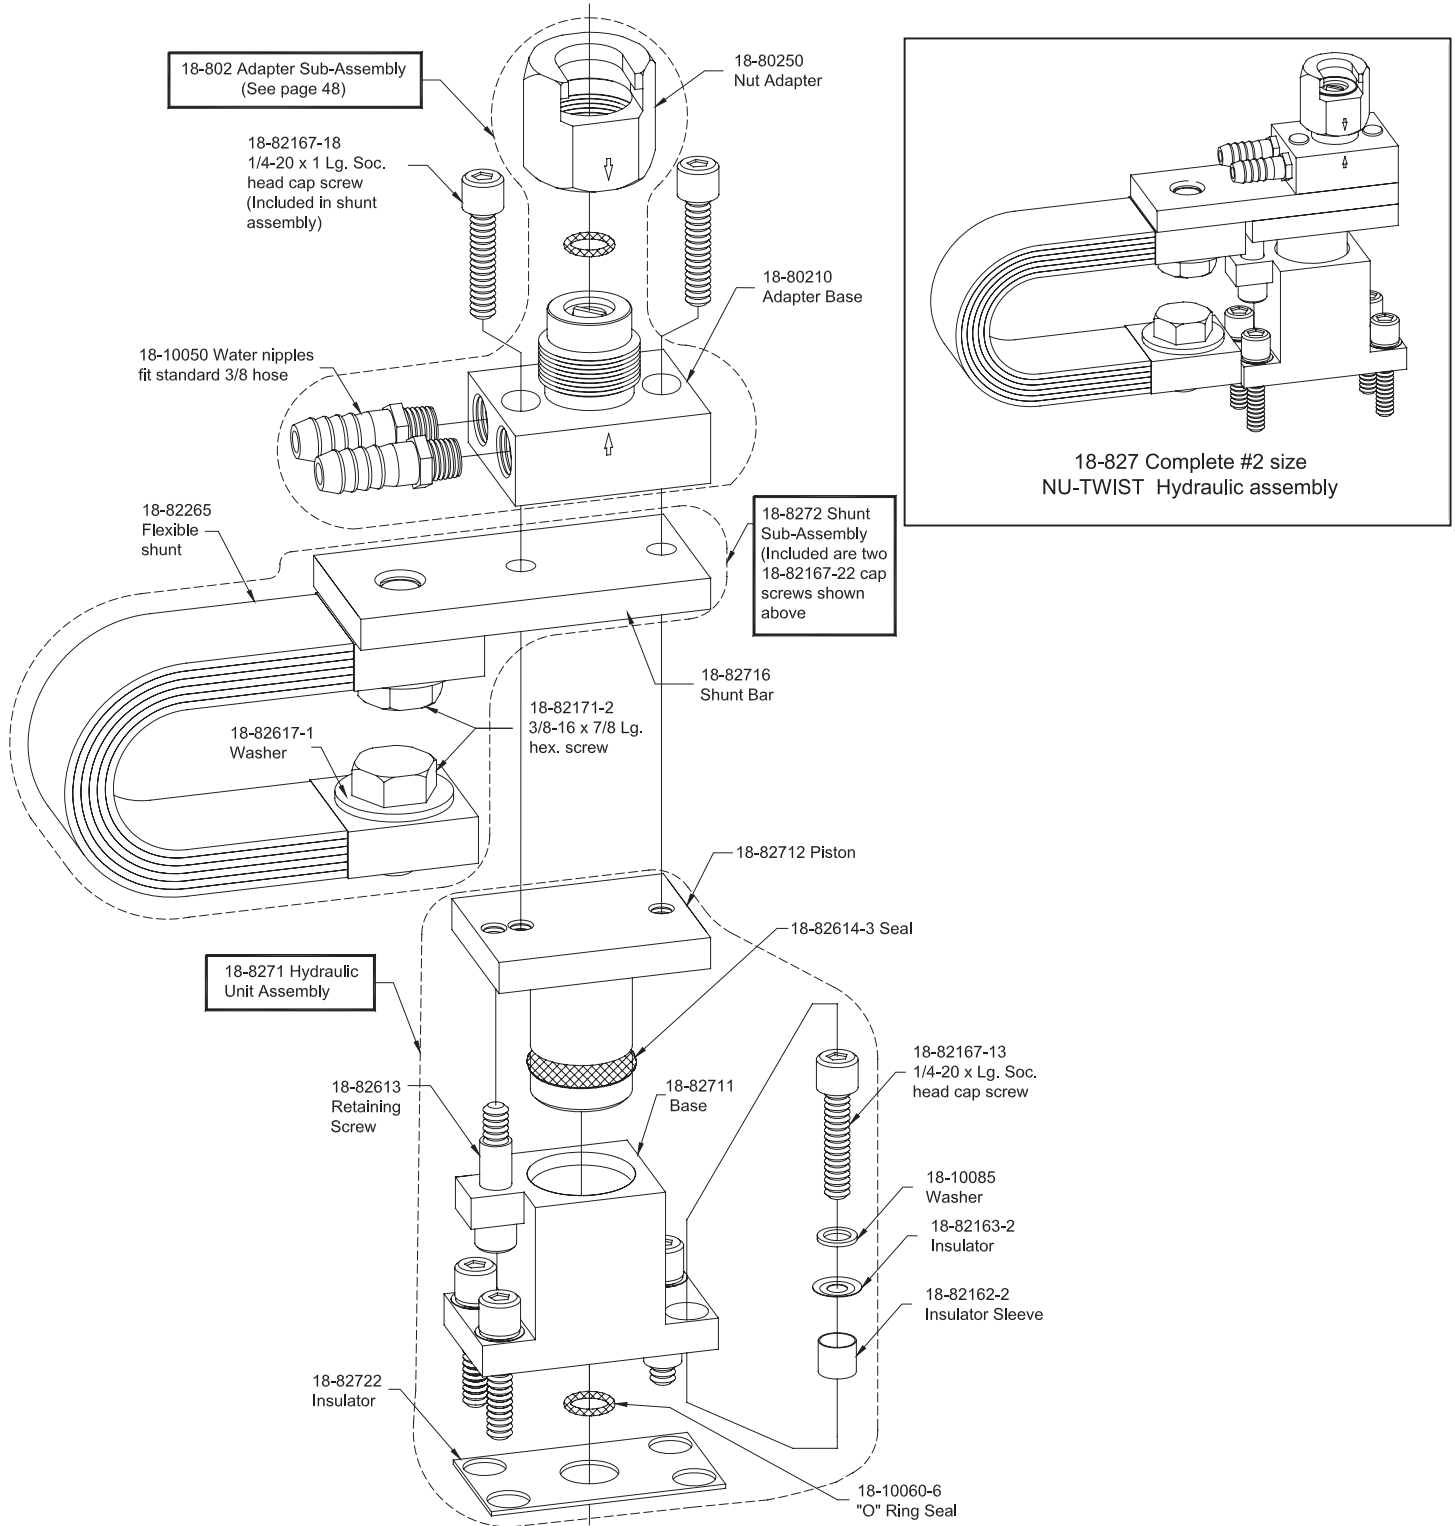




**FIXED UNIT HYDRAULIC EQUALIZING ASSEMBLIES**

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

TWO #1 OR #2 SIZE HYDRAULIC UNITS MOUNTED TO CUSTOMER'S DESIRED ELECTRODE SPACING.\*

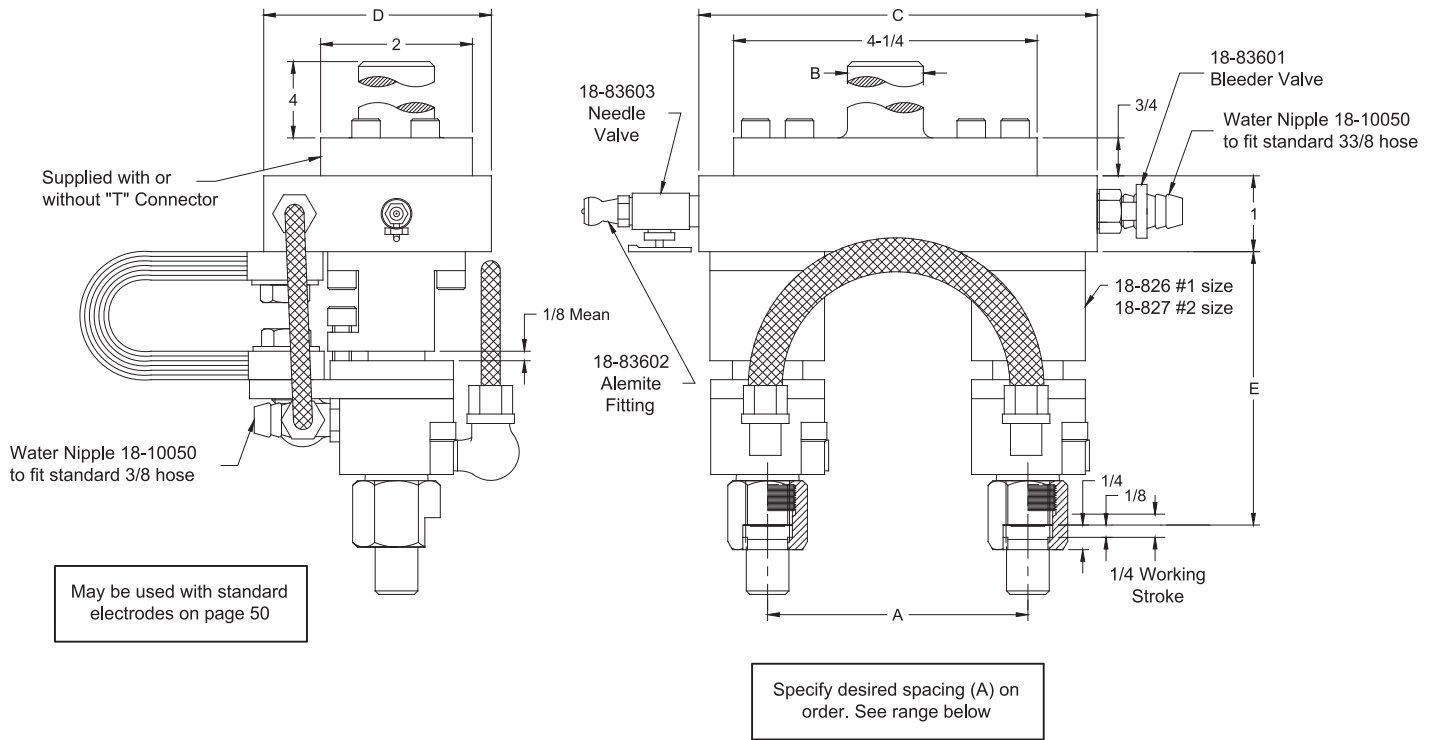

Assembly Unit Part No.	Unit Size	"T" Connector Shank Dia. B	Base Plate Length C	Base Plate Width D	Spacing* (Specify on Order) A	Max. Recommended Weld force Per Electrode LBS	Mean Height to Electrode Base E
18-846 18-84601-01	#1	None	6	3	1-1/32" to 5"	1000  (12,000 Amps @ 10% duty cycle)	3-13/64
18-84601-02 18-84601-03		1-1/4" 1-1/2"					
18-847 18-84701-01		#2					
18-84701-02 18-84701-03	1-1/4" 1-1/2"						


Note:

- Multiple units of 2-8 can also be supplied on custom designed base plates with or without "T" Connectors.
- Units may be modified with adapters for RW tapered caps and electrodes



**ADJUSTABLE HYDRAULIC EQUALIZING ASSEMBLY 18-836**

Part No. 18-836 (shown below) is a typical assembly using two 18-826 assemblies set up as a complete self-contained unit for making two spot welds at one time. **This unit is so arranged as to allow the center distances to be readily adjusted from 1-3/32" centers to 2-1/4" centers or by rearrangement of the same parts centers may be adjusted from 2-1/4" to 3-1/2"**. This setup also include facilities for filling and bleeding the hydraulic units. "T" Mounting 18-83614 is available to order for assembly 18-836. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

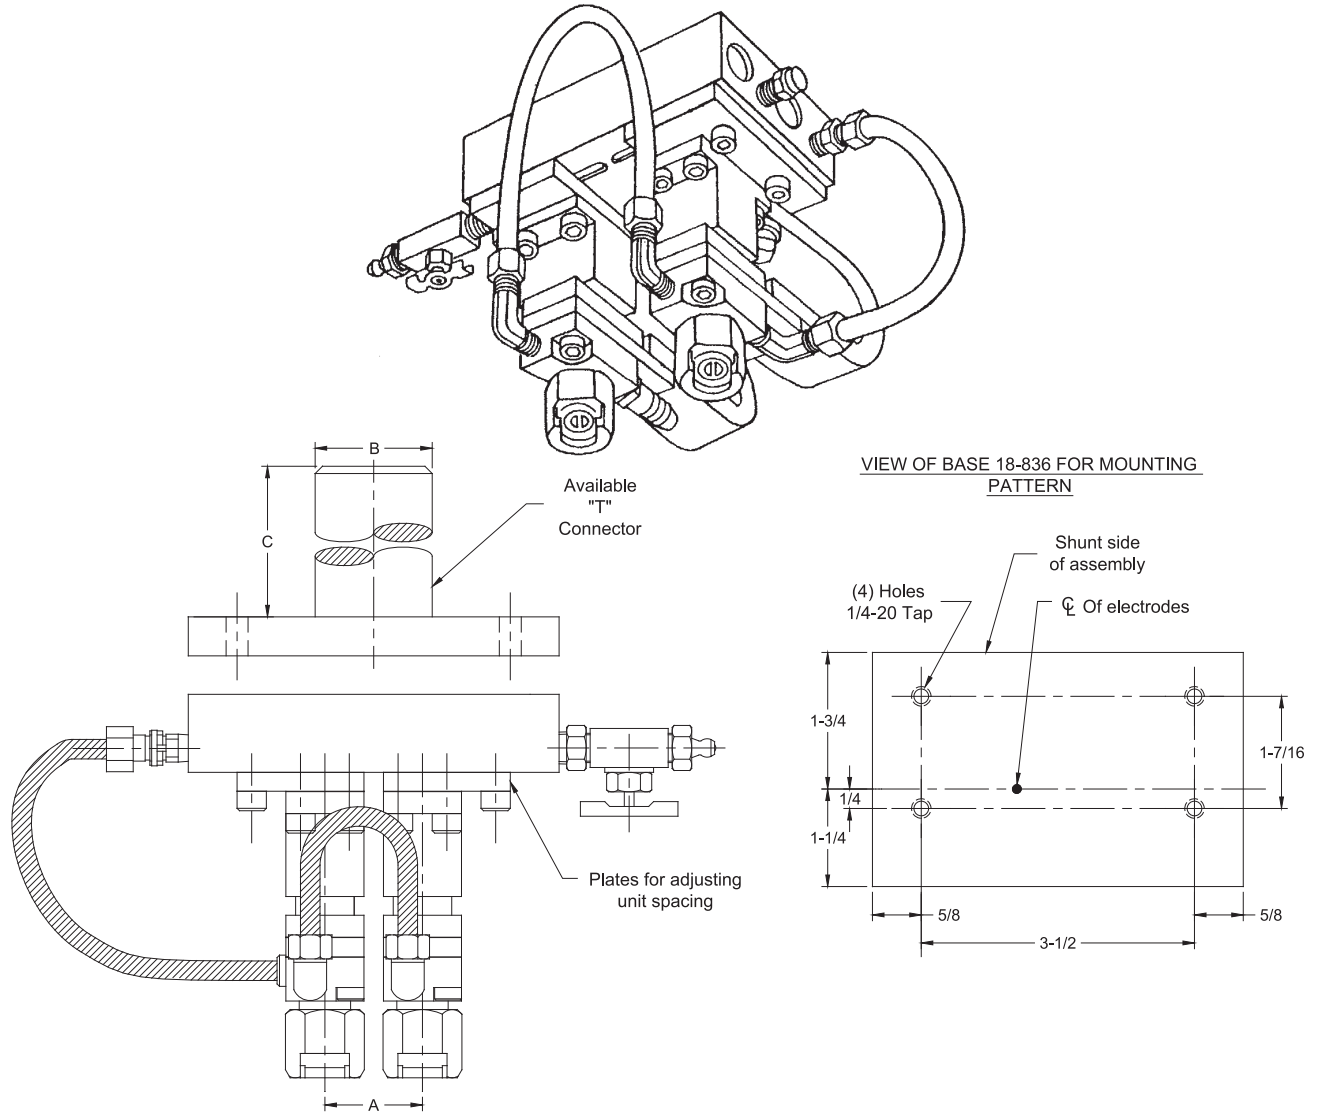

Assembly Part No.	Hydraulic Unit Size	Electrode Attachment ***	Adjustable Spacing Range A	"T" Connector	Max. Recommended Weld force Per Electrode LBS
18-836	#1	#1 NU-TWIST®	1-1/32 - 2-1/4 2-1/4 - 3-1/2*	NONE	1000 (12000 AMPS @ 10% Duty Cycle)

Available	Dia. B	Length C
18-83614-01	**	4
18-83614-03	**	**

\* Partial disassembly, rearrangement of plates, and bleeding of unit will be necessary to switch centerline ranges.


\*\* Customer must specify dimensions desired.

\*\*\* Other attachments available on request





**1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS**

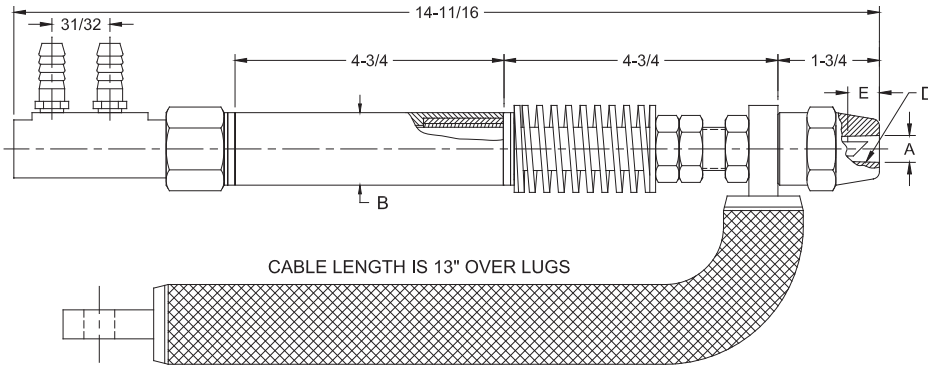

Like other low-inertia holders the heavy duty Adjust-A-Pressure Holders are used for multiple spot and projection welding, and are excellent for indirect welding when mounted in the Adjust-A-Angle Adapter.


Electrical current is conducted through heavy flexible cables and holder is installed to prevent any damaging effects to the spring mechanism. Light duty springs supplied to order.

Part No. Holder Assy.*	Major Taper Dia. A	Barrel Dia. B	Taper D	Standard Electrode Taper Engagement E	Pressure Range (Pounds)
18-1101	.463	1-1/4	4 RW	1/2	to 500
18-1102	.625		5 RW	3/4	
18-1103	.463	1-1/2	4 RW	1/2	
18-1104	.625		5 RW	3/4	

\* Standard holder uses 18-110006-1 spring. A heavy duty holder is available with spring 18-110006-2 for pressure to 1000 lbs.


For additional holder information and replacement parts see page 59.

**1150 SERIES ADJUST-A-ANGLE ADAPTERS**

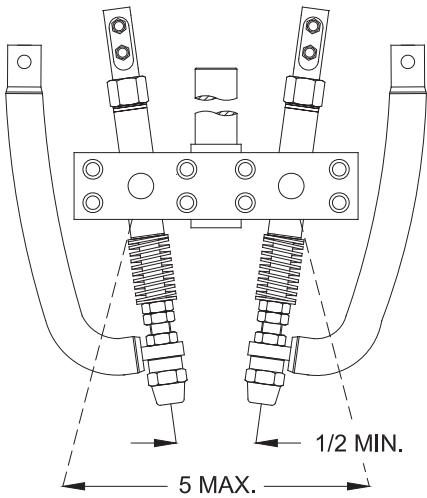

1100 SERIES HOLDERS ASSEMBLED IN 1150 SERIES ADAPTER

1150 SERIES ADJUST-A-ANGLE ADAPTERS ARE ADAPTABLE FOR USE WITH SPRING TYPE LOW INERTIA HOLDERS 1100 SERIES AS WELL AS STRAIGHT HOLDERS 100, 200, AND 300 SERIES.

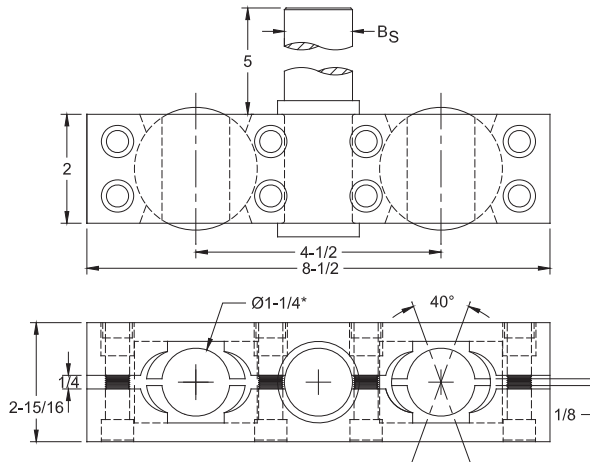


Adapter Assembly Part No.	Shank Dia. B <sub>S</sub>
18-1154	1
18-1155	1-1/4
18-1156	1-1/2

\* Adapters for barrel sizes other than 1-1/4 dia. available as special order



**1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS**

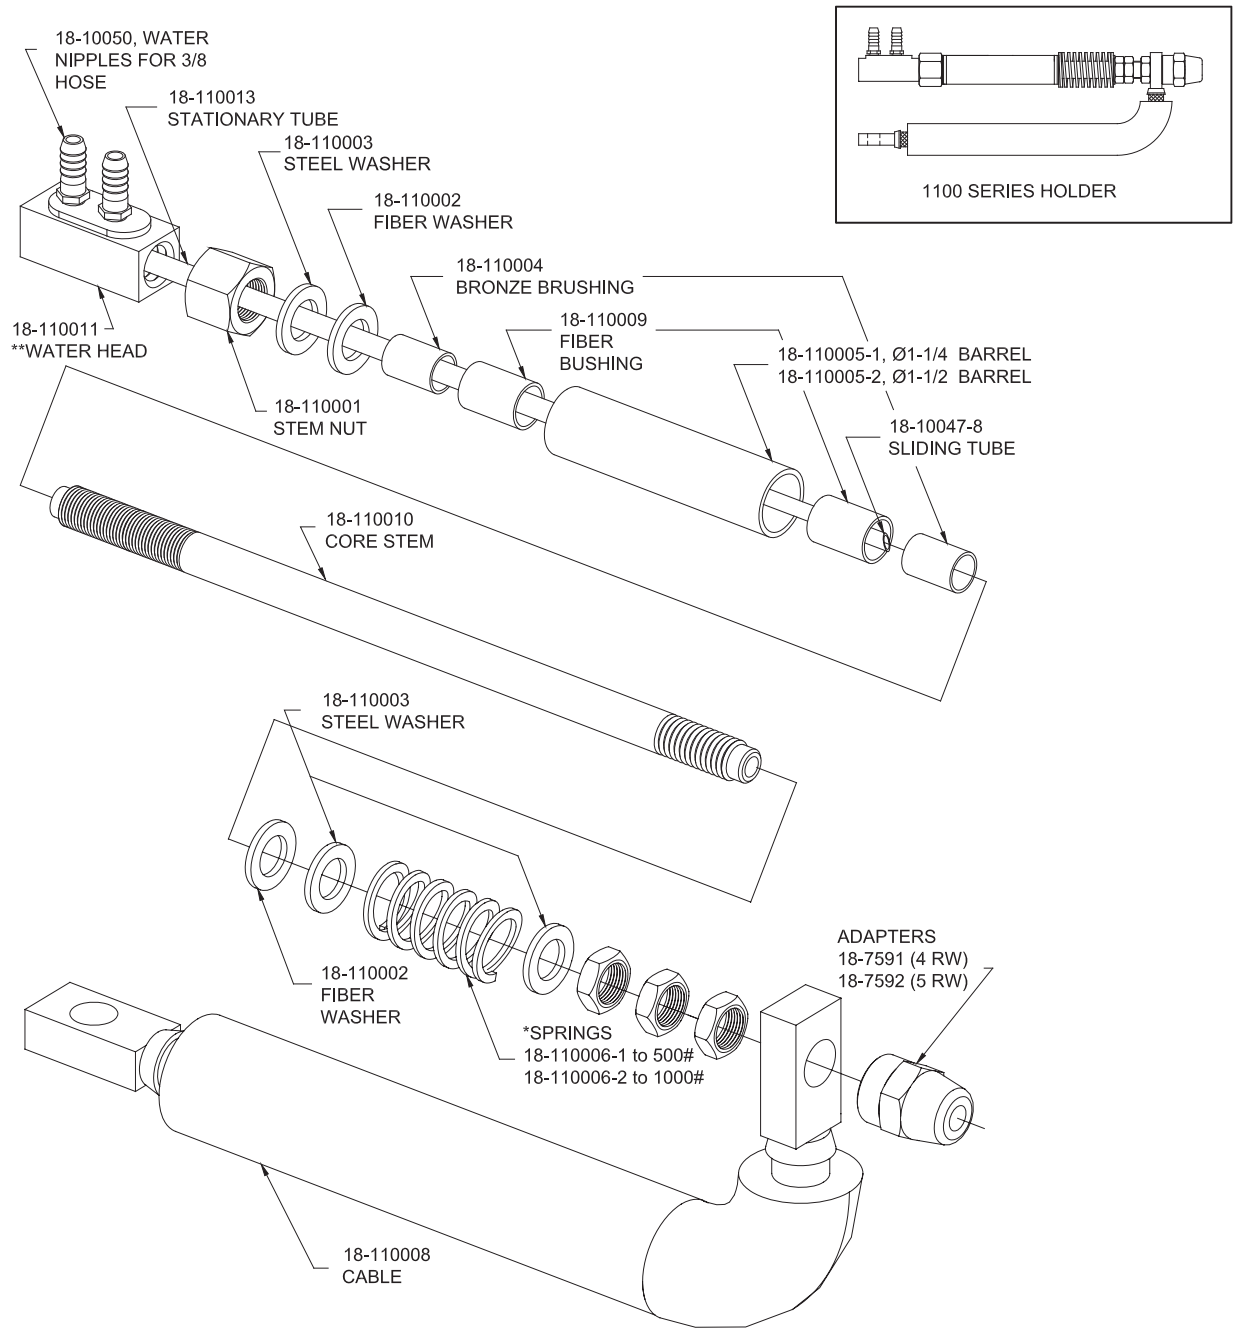

\*\* INCLUDES 18-110013, 18-10050, 18-10047-8

\* SPRINGS: 500# SPRING IS PAINTED BLUE; 1000# SPRING IS PAINTED YELLOW

Part No. Holder Assy.*	Barrel	Adapter	Adjust -A- Angle Adapters
18-1101 18-1102	18-110005-1	18-7591 18-7592	Select from 1150 Series Chart page 58
18-1103 18-1104	18-110005-2	18-7591 18-7592	Special order


\* See page 58 for more information




**APPLICATION SHEET FOR TYPICAL MULTIPLE SPOT WELDING SETUPS**

Typical Set Up For  
3 Spots at a time in Parallel

- 1 CMW Std. 1150 Series Adapter
- 2 CMW Std. 1100 Series Holders
- 1 CMW Special 1100 Series Holder

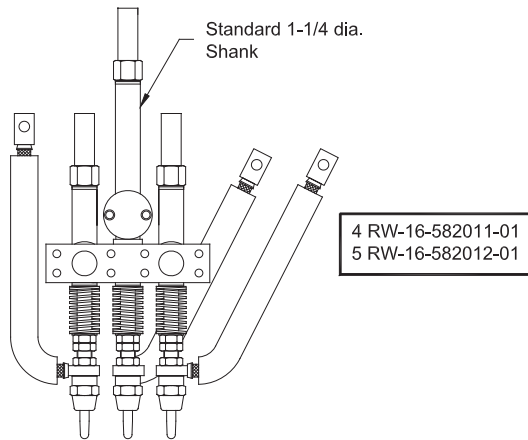


Typical Set Up For  
2 spots simultaneously  
in parallel

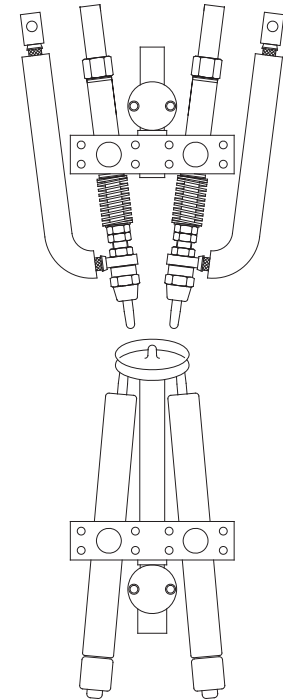

- Upper
- 2-1100 Series Holders
- 1-1150 Series Adapter

- Lower
- 2-100,200 or 300 Series Holders
- 1-1150 Series Adapter with special center shank

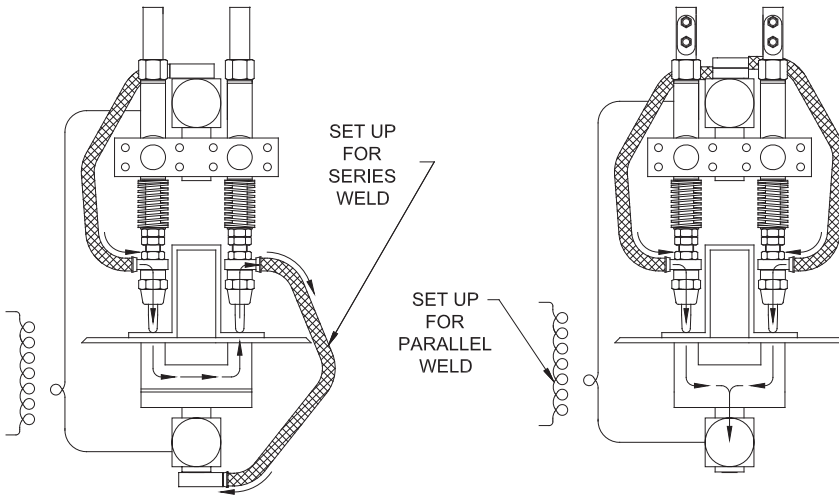


Contact Factory

All above items  
priced and made  
to special order

Illustrations  
only


**TYPICAL SET UP OF 800 SERIES "NU-TWIST"® UNITS**

For dual spot welding using hydraulic "Nu-Twist"® Pressure equalizing subassemblies and surface mounted adapters as basic building blocks

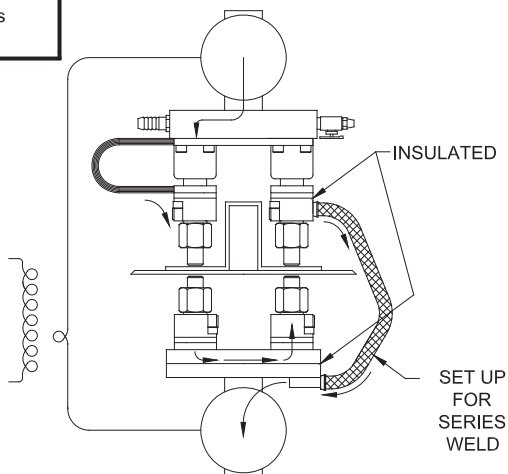


Upper  
two  
18-826  
hydraulic  
unit assemblies  
mounted on  
fixed centers  
(See Pages  
52, 53, 56)

Lower  
two  
18-801  
surface  
mounted  
"Nu-Twist"®  
Adapters  
(See page 48)


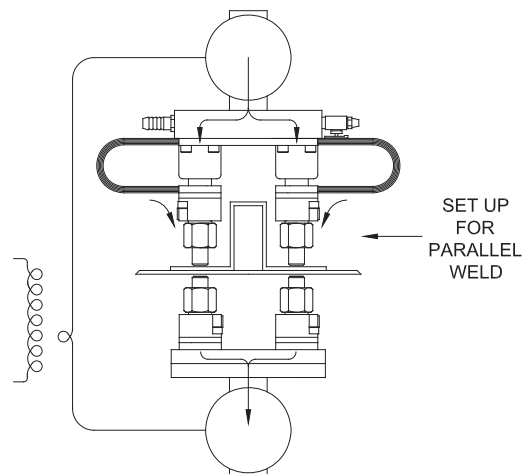




**PLATEN MOUNTED ELECTRODE HOLDERS**

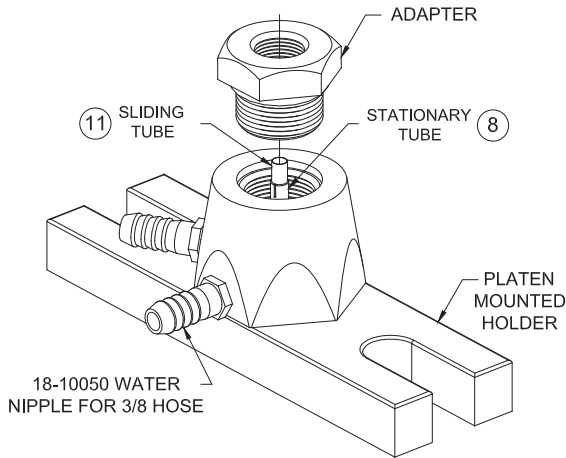

The CMW Platen Mounted Holder, as shown below, has the inlet water nipple at position #1 and the outlet water nipple at position #2, any other combinations may be special ordered by changing the last two digits of the part number. The first of the last two digits indicates the location of the inlet nipple and the second digit indicates the location of the outlet nipple. Example; part No. 18-0510-56 would place the inlet water nipple at position #5 and the outlet water nipple at position #6.

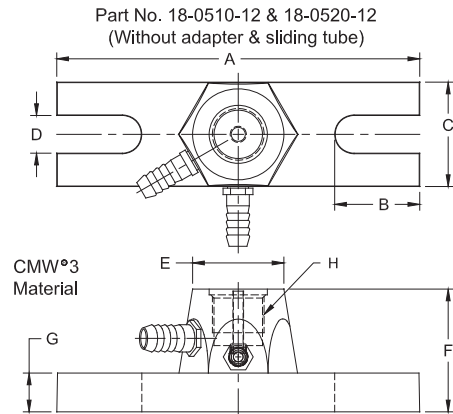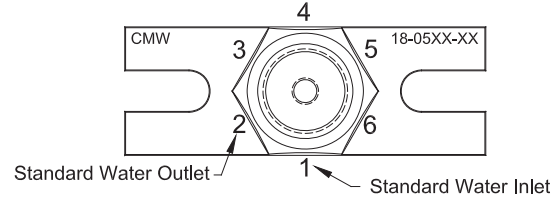

Order one of each for your application		Order as required				Overall Length A	Slot Depth B	Width C	Slot Width D	Top Dia. E	Overall Height F	Base Height G	Thread H
Holder Part No.	Adapter Part No.	Attachment Type	Stationary Tube 8	Sliding Tube 11	Sliding Length								
18-0510-12	18-785	4RW	18-40041-5	18-50041-3 18-50041-2	1-3/8 2-1/2	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	1-14 UNF
18-0520-12	18-785	4RW	18-40041-5	18-50041-3 18-50041-2	1-3/8 2-1/2	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-786	5RW	18-40041-5	18-40043-11 18-40043-5 18-40043-9	1-3/8 2 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-786	5RW	18-40041-5	18-40043-11 18-40043-5 18-40043-9	1-3/8 2 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-7863	6RW	18-40041-5	18-40043-14 18-40043-9	2-1/8 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-7863	6RW	18-40041-5	18-40043-14 18-40043-9	2-1/8 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-787	7RW	18-40041-5	18-40043-15 18-40043-9	2-3/8 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-787	7RW	18-40041-5	18-40043-15 18-40043-9	2-3/8 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-812	#2 SIZE Nu-Twist®	18-40041-5	-	-	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
	18-7743**	5/8-18 THD.											
18-0520-12	18-812	#2 SIZE Nu-Twist®	18-40041-5	-	-	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
	18-7743**	5/8-18 THD.											

\*\*Adapter for 1" dia. & 1-1/4 dia. Chameleon/Max-Life™ projection welding electrodes and 18-811 #1 size threaded "NU-TWIST"® adapter.







**MULTI-SPOT WELDER ELECTRODE ADAPTERS**

CMW electrode adapters for multispot air or hydraulic pistons are supplied with 3/4 diameter straight piston rod ends. These adapters are equipped with means for attaching the welding cable from the transformer and the water hoses to the inlet and outlet water connections.

These adapters are available in four basic assemblies as shown in the table.

**MULTI-SPOT WELDER ELECTRODE ADAPTER REPLACEMENT PARTS**

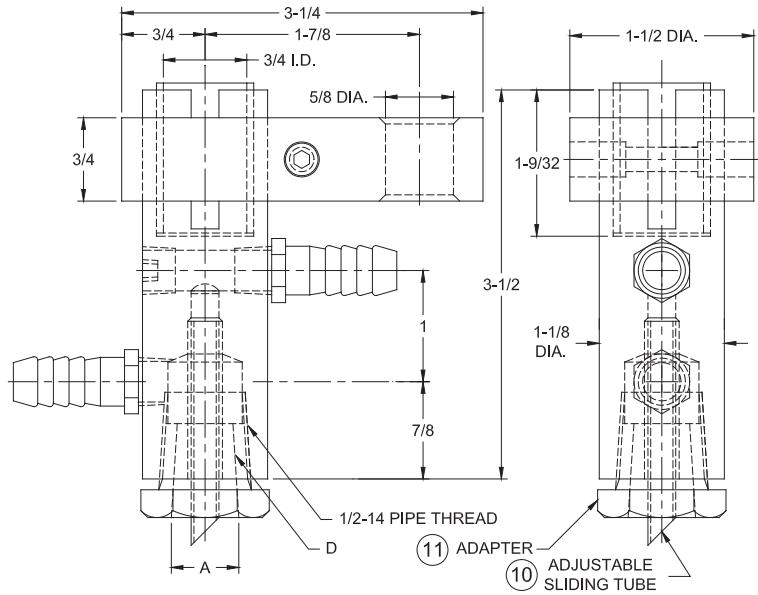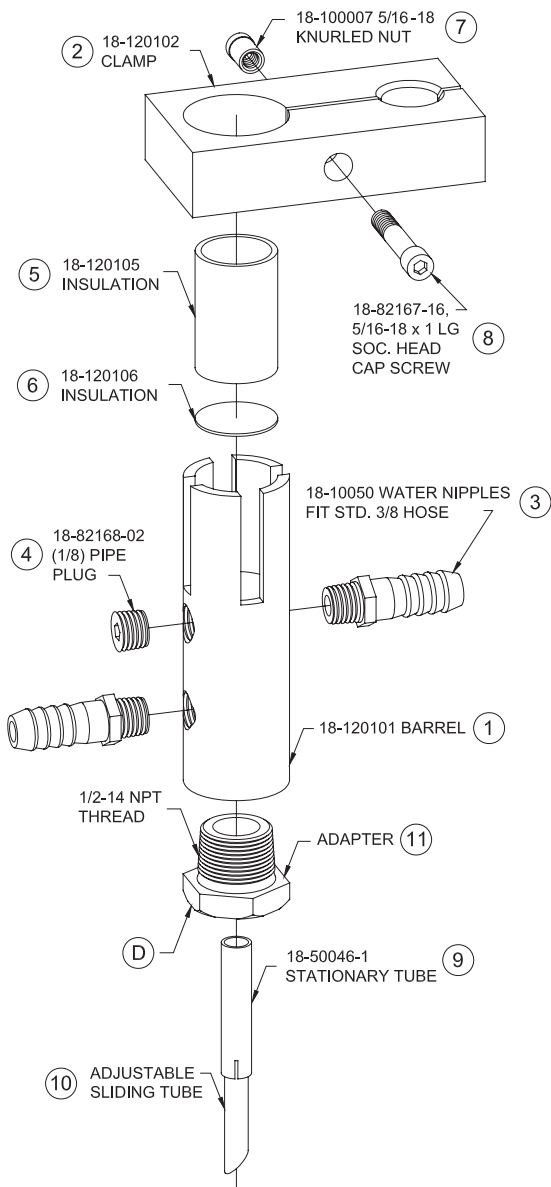





Part No. Assembly	Major Tape Dia. A	Attachment Type D	Adjustable Sliding tube 10	Adapter Part No. 11*
18-1201	--	1/2-14 NPT	18-10046-23	--
18-1202	.414	5 RW Male cap	--	18-7465-07
18-1203	.463	4 RW	18-10046-23	18-746-07
18-1204	.625	5 RW	18-10046-23	18-747-07

All assemblies include items 1, 2, 3, 4, 5, 6, 7, 8, and 9.


\* See page 31 for adapter details.




**WELDING MACHINE CONTROL CONTACTORS**

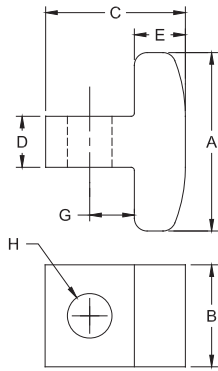




16-1303  
CMW<sup>®</sup>353




16-1304  
CMW<sup>®</sup>353



16-1306  
CMW<sup>®</sup>353

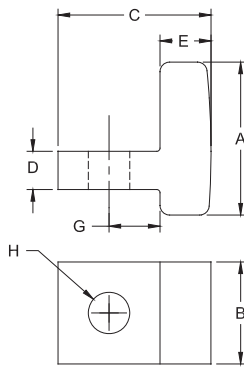

16-1307  
CMW<sup>®</sup>353



16-1309  
CMW<sup>®</sup>353

For use primarily in resistance welding controls CMW maintains standard stocks of five contactors listed. They consist of CMW<sup>®</sup>353 material, a predominately copper alloy possessing arc resisting properties.

CMW<sup>®</sup>353 material has the ability to interrupt the current in a short time with minimum arc hangover. Because of the arc resistant characteristics of the metal, only the desired number of cycles of current are transmitted to the welding machine. Uniform welding quality is obtained because no additional current passes through the control, since CMW<sup>®</sup> 353 material tends to prevent the arc from restriking.

Contactor Part No.	Overall Length A	Width B	Height C	D	E	G	Hole Dia. H
16-1303	1-3/4	1	1-3/8	1/2	1/2	7/16	7/16
16-1304	1-5/8	7/8	1-1/4	3/8	7/16	7/16	11/32
16-1306	1-5/16	3/4	1-1/16	5/16	3/8	3/8	11/32
16-1307	1-1/2	1	1-1/2	3/8	1/2	1/2	11/32
16-1309	1-1/4	7/8	1-1/4	3/8	7/16	15/32	25/64

EXAMPLE: 16-1303






**ACCESSORIES, REAMERS, WATER HOSE, HOSE CONNECTOR, HOSE COUPLING & HOSE CLAMP**

**REAMERS**

High speed steel reamers to rework worn tapers in holders are available for standard 4, 5, 6, 7 RW, and 4, 5, 6 RW cap tapers. Hollow reamers make it possible to recondition worn holder tapers without removing the water tubes.

Reamer Part No.	Taper Type	Type
18-1321	6 RW	Hollow
18-1322	4 RW	Not Hollow
18-1323	5 RW	Hollow
18-1324	7 RW	Hollow
18-1327	4 RW (Cap taper)	Not Hollow
18-1328	5 RW (Cap taper)	Not Hollow
18-1329	6 RW (Cap taper)	Not Hollow



**WATER COOLING HOSE (PART NUMBER 18-1350)**

CMW water-cooling hose is the finest available. Made by a prominent hose manufacturer. This hose is 3/8 diameter which properly fits the water nipples on CMW holders. It is available in 50-foot coils or can be cut to length.


COOLING-WATER HOSE 18-1350



**HOSE CONNECTOR FOR 3/8 HOSE (PART NUMBER 18-1351)**

This hose connector, placed in water-cooling hose line, facilitates quick change of holders or dies. The male and female ends of these connectors should be reversed in the inlet and outlet lines to eliminate confusion in changing setups.


HOSE CONNECTOR




**QUICK CONNECTIVE COUPLING ASSEMBLY (PART NUMBER 18-1352)**

HOSE COUPLING

The plug of this coupling can be mounted on CMW holders converting them for quick hose changes. An automatic water shut-off valve is built into the coupling.



FEMALE SOCKET  
(1/8 FEMALE PIPE THREAD)  
18-135200-1




MALE PLUG  
(1/8 MALE PIPE THREAD)  
18-135200-2



**HOSE CLAMP (PART NUMBER 18-1353)**

HOSE CLAMP

This aircraft type hose clamp gives positive tightening action which eliminates water leakage. It is easy to install and remove from standard 3/8 water hose.





## CAP ELECTRODE EXTRACTOR FORK

CAP ELECTRODE EXTRACTOR FORK  
PART NO. 18-1381-1 FOR 5 RW CAPS  
PART NO. 18-1381-2 FOR 4 RW CAPS  
PART NO. 18-1381-3 FOR 6 RW CAPS

These hardened steel wedge type forks will make the removal of electrodes caps quick and easy. They can be used on both male and female caps.



---

## AIR POWERED ELECTRODE EXTRACTOR

AIR POWERED ELECTRODE EXTRACTOR  
PART NO. 18-1382-1 FOR 6 RW ELECTRODES  
PART NO. 18-1382-3 FOR 5 RW ELECTRODES


This high quality air powered electrode extractor comes in two standard sizes for extracting 5 RW and 6 RW male and female cap and standard straight electrodes. Air pressure recommendations suggested between 85 PSI minimum and 100 PSI maximum. Ideal pressure is 90 PSI. Standard 3/8 diameter air nipple and quick change plug included with extractor.







**PNEUMATIC POWER HANDLE ELECTRODE DRESSER PART NO. 18-1310**

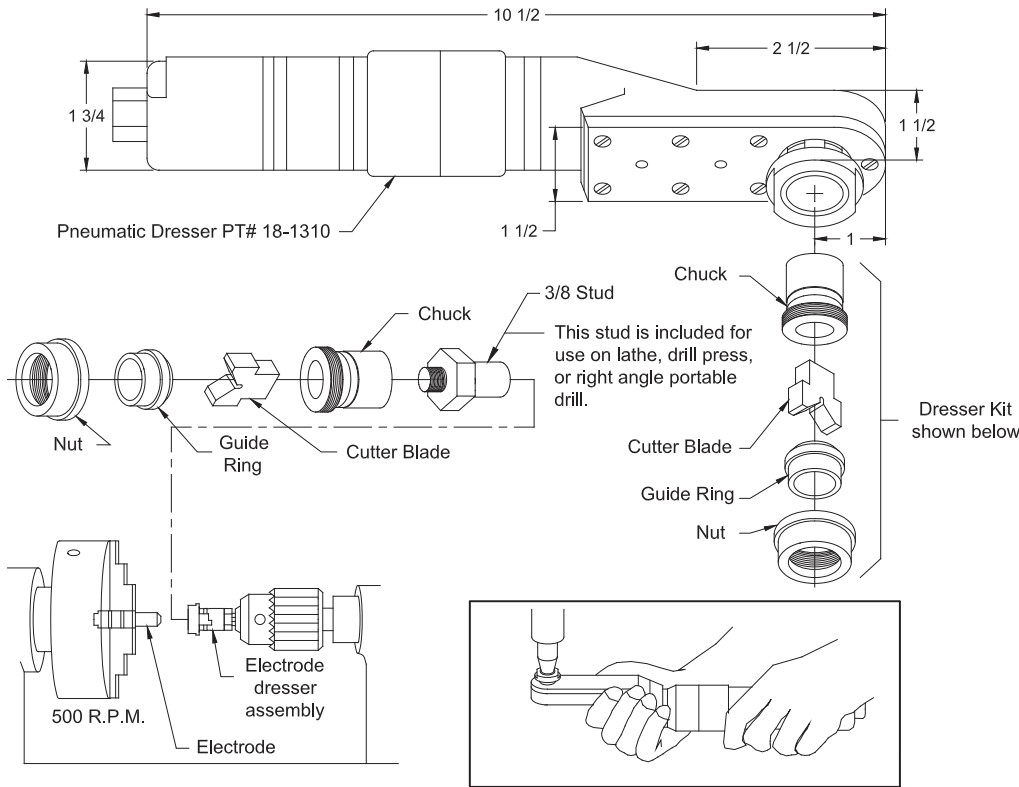

Light weight and rugged construction, this CMW Pneumatic Power Handle requires a clearance of only 1-1/2" with a standard ring and 2" with an extended ring. In most situations this allows dressing of electrodes without removal from the welder. Operating at a cutting speed of 1200 rpm, it enables the operator to dress electrodes quickly and accurately. Cutters and guide rings are easily replaced. These must be matched to the electrode nose and are selected from the chart below.

**CMW Electrode Dresser 18-1310 is supplied without blade holder, ring, and cutter blade.** When ordering, specify the "Kit" appropriate for your dressing needs as selected from the table below. "The stud" furnished with the kit is not required when using the Pneumatic Power Handle. It may optionally be used, but will increase the clearance required on the welder for dressing. Additional special cutters can be furnished upon special request.

These kits may also be used for cap electrode dressing.

Size To Dress									
4 RW .482 Dia	Nose style CMW Electrode No.	Dome x11x..	Pointed x21x..	Flat x31x..	2" Radius x51x..	3" Radius x81x..	4" Radius x91x..	10" Radius x61x..	Truncated x71x..
	Kit to Order**	18-1390411	18-1390420	18-1390410	18-1390413	18-1390414	18-1390415	18-1390416	18-1390412
	Replacement Blade Replacement Guide Ring (Each for above kit)	18-139411 18-139401	18-139420 18-139402	18-139410 18-139401	18-139413 18-139401	18-139414 18-139401	18-139415 18-139401	18-139416 18-139401	18-139412 18-139401
5 RW .625 Dia	CMW Electrode No.	x12x..	x22x..	x32x..	x52x..	x82x..	x92x..	x62x..	x72x..
	Kit to Order**	18-1390511	18-1390520	18-1390510	18-1390513	18-1390514	18-1390515	18-1390516	18-1390512
	Replacement Blade Replacement Guide Ring (Each for above kit)	18-139511 18-139501	18-139520 18-139502	18-139510 18-139501	18-139513 18-139501	18-139514 18-139501	18-139515 18-139501	18-139516 18-139501	18-139512 18-139501

\*\* Note: This kit includes Stud for (for 3/8 Keyed Chuck), Chuck, 1 Guide Ring, 1 Appropriate blade, and Retaining Nut.


Note: Cutters are **NOT** designed to conform to "Electrode Cap" geometries. Caps are intended for value salvage when expended.



**ELECTRODE DRESSER PART NUMBER 18-1307**

ELECTRODE DRESSER PART NUMBER 18-1307

The Electrode Dresser quickly removes the "mushroomed" portions of spot welding electrodes and **renews 4 RW or 5 RW taper, dome or pointed electrodes with the proper operating contour.** The Electrode Dresser re-machines both upper and lower electrodes to the correct profile "On The Job" - provided both are identical - without removal of the electrodes from their holders. Dresser is 10" long, with a replaceable cutter of hardened tool steel.



ORDER REPLACEMENT CUTTERS - 18-130701  
ORDER REPLACEMENT HANDLE - 18-130702

**ELECTRODE DRESSER PART NUMBER 18-1370**

ELECTRODE DRESSER PART NUMBER 18-1370


In certified resistance welding and where clean, strong welds are necessary on a production basis the Maintain-A-Contour Dresser pays big dividends. Its use not only assures consistent quality welds in aircraft metals, but saves valuable production time in all dressing operations.

The Maintain-A-Contour Dresser is supplied with a spool of 240 grit cloth, and one set of (2 per set) precision ground contour plates. **Specify the size radius (2" - 3" - 4" - 6" - 8" - 10") plates required.**


Plates with special radii are available on special request. The abrasive cloth is standard 2" wide.



PRECISION GROUND CONTOUR PLATES

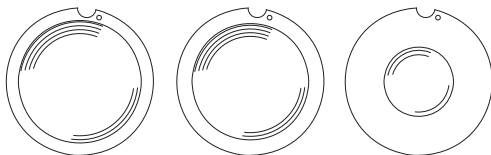

Dresser Part No.	Spherical Radius of Contour Plate	Use With	
		Contour Plates	Abrasive Cloth
18-1370	2"	18-137001	18-137009
	3"	18-137002	
	4"	18-137003	
	6"	18-137004	
	8"	18-137005	
	10"	18-137006	

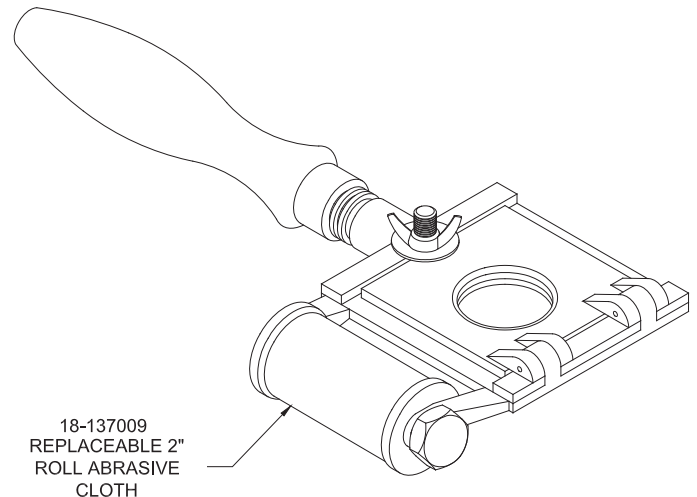



DIAMETER THK. WTH. (INCHES)	RWMA ALLOY CLASS NO.	CMW® ALLOY NO.	CMW PART NUMBER	WEIGHT/LBS.	
				INCH	FOOT
<b>Rounds</b>					
1/8	2	CMW®3	58704	.012	.147
1/4	2	CMW®3	58707	.016	.192
3/8	2	CMW®3	58712	.035	.420
7/16	2	CMW®3	58713	.048	.576
.482	2	CMW®3	50333	.058	.696
.482	1	CMW®28	65256	.058	.696
1/2	2	CMW®3	58715	.063	.756
1/2	1	CMW®28	64124	.063	.756
5/8	1	CMW®28	64126	.099	1.188
1/2	3	CMW®100	75836	.063	.756
5/8	2	CMW®3	58716	.099	1.188
5/8	3	CMW®100	75835	.099	1.188
3/4	2	CMW®3	58708	.142	1.704
7/8	2	CMW®3	58719	.193	2.316
7/8	3	CMW®100	75736	.193	2.316
1.0	2	CMW®3	58710	.251	3.012
1-1/4	2	CMW®3	58720	.395	4.740
1-1/4	3	CMW®100	59035	.395	4.740
1-1/2	2	CMW®3	58724	.568	6.816
1.510	2	CMW®3	52217	.570	6.840
2.0	2	CMW®3	58731	1.010	12.120
2.0	3	CMW®100	75838	1.010	12.120
2-1/2	2	CMW®3	58767	1.580	18.960
3-1/8	2	CMW®3	51235	2.470	29.640
<b>Hex</b>					
.250 Hex	2	CMW®3	79072	.013	.156
.375 Hex	3	CMW®100	79993	.029	.348
.438 Hex	2	CMW®3	79556	.040	.480
.438 Hex	3	CMW®100	79544	.040	.480
.500 Hex	2	CMW®3	76569	.052	.624
.500 Hex	3	CMW®100	75450	.052	.624
.625 Hex	2	CMW®3	68487	.081	.972
.750 Hex	2	CMW®3	58755	.117	1.404
.750 Hex	3	CMW®100	78781	.117	1.404
.875 Hex	2	CMW®3	58756	.160	1.920
1.000 Hex	2	CMW®3	58655	.208	2.496
1.000 Hex	3	CMW®100	55848	.208	2.496
1.125 Hex	2	CMW®3	52956	.264	3.168
1.125 Hex	3	CMW®100	79933	.264	3.168
1.250 Hex	2	CMW®3	73784	.326	3.912
1.250 Hex	3	CMW®100	67490	.326	3.912
1.500 Hex	3	CMW®100	50561	.469	5.628
<b>Squares and Rectangles</b>					
1/4 x 1-1/2	2	CMW®3	58881	.120	1.440
1/2 x 1/2	2	CMW®3	58766	.080	.960
5/8 x 5/8	2	CMW®3	58677	.125	1.500
1 x 1	2	CMW®3	58690	.320	3.840
1 x 1-1/2	2	CMW®3	50322	.480	5.760
1 x 2	2	CMW®3	58759	.640	7.680
1 x 3	2	CMW®3	50324	.960	11.520
1-1/2 x 3	2	CMW®3	74630	1.440	17.280
	3	CMW®353	VARIOUS SHAPES AND SIZES AVAILABLE IN THESE MATERIALS. CONSULT CMW INC. CUSTOMER SERVICE FOR PRICE AND DELIVERY INFORMATION.		
	4	CMW®73			
	5	ELKALOY®D			
	10	ELKONITE®1W3			
	11	ELKONITE®10W3			
	12	ELKONITE®30W3			
	13	ELKON®100W			
	14	ELKON®100M			



**ELKONITE® BAR STOCK**

**TYPICAL PROPERTIES OF ELKONITE® MATERIALS**  
(See CMW Inc. Catalog Series 200)

Elkonite® Material	Composition % by Weight	Density		Electrical		Theoretical		Hardness (Rockwell)	Modulus of Rupture In Bending		ASTM Specification
		g/cm or (Mg/m <sup>3</sup> )	lb/in <sup>3</sup>	Conductivity %ACS	Resistivity (n-ohm-m)	Thermal Btu-h <sup>-1</sup> -ft <sup>-1</sup> -F <sup>-1</sup>	Conductivity (W-m <sup>-1</sup> -K <sup>-1</sup> )		psi	(MPa)	
1W3	55W:45Cu	12.50	.452	53	(32.5)	180	(310)	77HRB	110.000	(758)	B702
3W3	68W:32Cu	13.93	.503	50	(34.5)	160	(280)	90HRB	130.000	(896)	B702
5W3	70W:30Cu	14.18	.512	48	(35.9)	160	(280)	95 HRB	140.000	(965)	B702
10W3	75W:25Cu	14.84	.536	45	(38.3)	150	(260)	98 HRB	150.000	(1030)	B702
10W53	75W:25Cu*	14.79	.534	28	(61.6)	85	(150)	109 HRB	200.000	(1380)	B702
30W3	80W:20Cu	15.56	.562	41	(42.1)	145	(250)	103 HRB	170.000	(1170)	B702
TC5	50WC:50Cu	11.26	.408	45	(38.3)	170	(290)	94 HRB	160.000	(1100)	-
TC10	56WC:44Cu	11.64	.421	42	(41.0)	160	(280)	100 HRB	180.000	(1240)	-
TC20	70WC:30Cu	12.65	.457	30	(57.5)	140	(240)	37 HRC	200.000	(1380)	-

\*Cu Alloy 10W53 FULLY HEAT TREATED

**ELKONITE® 10W3 ROUND BARS—8 INCH LENGTH**

FINISHED DIAMETER	PART NUMBER	FINISHED DIAMETER	PART NUMBER
1/8	15-140200-64	3/4	15-141200-64
3/16	15-140300-64	7/8	15-141400-64
1/4	15-140400-64	1	15-141600-64
5/16	15-140500-64	1-1/8	15-141800-64
3/8	15-140600-64	1-1/4	15-142000-64
7/16	15-140700-64	1-3/8	15-142200-64
1/2	15-140800-64	1-1/2	15-142400-64
9/16	15-140900-64	1-3/4	15-142800-64
5/8	15-141000-64	2	15-143200-64

**ELKONITE® 10W3 RECTANGULAR BARS—8 INCH LENGTH**


SIZE-INCHES			SIZE-INCHES			SIZE-INCHES			
THICK	WIDTH	PART NUMBER	THICK	WIDTH	PART NUMBER	THICK	WIDTH	PART NUMBER	
1/8	1/8	15-140202-64	5/16	5/16	15-140505-64	1/2	1-1/2	15-142408-64	
	1/4	15-140402-64		3/8	15-140605-64		2	15-143208-64	
	5/16	15-140502-64		1/2	15-140805-64		4	15-146408-64	
	3/8	15-140602-64		5/8	15-141005-64	5/8	5/8	15-141010-64	
	1/2	15-140802-64		3/4	15-141205-64		3/4	15-141210-64	
	5/8	15-141002-64		1	15-141605-64		1	15-141610-64	
	3/4	15-141202-64		1-1/4	15-142005-64		1-1/4	15-142010-64	
	1	15-141602-64		1-1/2	15-142405-64	1-1/2	15-142410-64		
	1-1/4	15-142002-64		2	15-143205-64	2	15-143210-64		
	1-1/2	15-142402-64		4	15-146405-64	4	15-146410-64		
	2	15-143202-64		3/8	3/8	15-140606-64	3/4	3/4	15-141212-64
	4	15-146402-64			1/2	15-140806-64		1	15-141612-64
3/16	3/4	15-141203-64	5/8		15-141006-64	1-1/4		15-142012-64	
	1/4	1/4	15-140404-64		3/4	15-141206-64		1-1/2	15-142412-64
		5/16	15-140504-64	7/8	15-141406-64	2	15-143212-64		
		3/8	15-140604-64	1	15-141606-64	4	15-146412-64		
		1/2	15-140804-64	1-1/4	15-142006-64	1	1	15-141616-64	
		5/8	15-141004-64	1-1/2	15-142406-64		1-1/4	15-142016-64	
		3/4	15-141204-64	1-1/2	15-143206-64		1-1/2	15-142416-64	
		1	15-141604-64	2	15-143206-64		2	15-143216-64	
		1-1/4	15-142004-64	4	15-146406-64	4	15-146416-64		
		1-1/2	15-142404-64	1/2	1/2	15-140808-64	1-1/4	1-1/4	15-142020-64
		2	15-143204-64		5/8	15-141008-64		1-1/2	15-142420-64
		4	15-146404-64		3/4	15-141208-64		2	2
			1		15-141608-64				
		1-1/4	15-142008-64						

\*Contact Factory For Additional Sizes





**FORCE GAUGE**

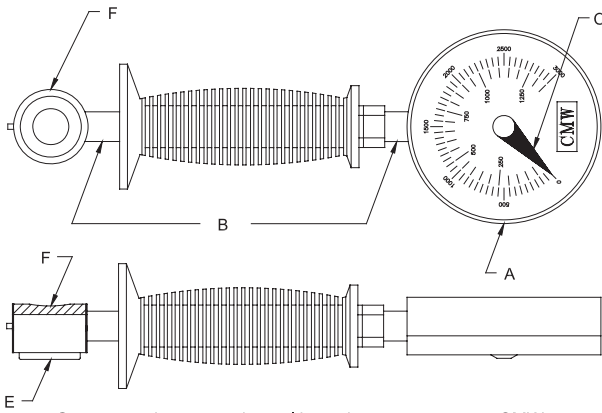

Gauge may be repaired or calibrated upon returning to CMW.

**APPROXIMATE PRESSURE EXERTED BY AIR CYLINDER SIZE**

Diameter Inches	Cylinder area Sq. In				
4	= 12.5	X	Welder	=	Electrode
5	= 19.5	X	Gauge	=	Force
6	= 28.0	X	Pressure	=	Pressure
8	= 50.0	X		=	

**FEATURES AND SPECIFICATIONS**

- Dependable, accurate, and fast
- 1% accuracy at 50% of scale reading
- Available in all popular ranges
- Standard and Deluxe gauges leave measurement after test.
- Certifiable

**USE WITH**

- Press type welding machines
- Rocker type welding machines

**ORDERING INFORMATION AND DIMENSIONS**

Part Number	Gauge Type	Sensor A	Connection B	Force Range C	Live D	Pad E	Rear Pad (Optional) F
LC2564-73	STANDARD	LC <sub>2</sub>	LC2 <sub>5</sub>	LC256 <sub>4</sub>	LC2564- <u>7</u>	LC2564-7 <sub>3</sub>	-
LC2164-7391	DELUXE	LC <sub>2</sub>	LC2 <sub>1</sub>	LC216 <sub>4</sub>	LC2164- <u>7</u>	LC2164-7 <sub>3</sub>	LC2164-7391
LC8568-73	DIGITAL	LC <sub>8</sub>	LC8 <sub>5</sub>	LC856 <sub>8</sub>	LC8568- <u>7</u>	LC8568-7 <sub>3</sub>	-

**CREATE GAUGE NUMBER FROM BUILD A FORCE GAUGE OPTIONS BELOW FOR GAUGE TO SUIT YOUR NEEDS**

LC = Load Cell Sensor A	Connection B	Force Range C	Live D	Pad E	Rear Pad (Optional) F
1 = CUSHIONED SENSOR	1 = FLEX/SW 15° 11" OAL *	5 2 = 300	7	1 = FLAT POLY	9 1 = FLAT*
2 = 2.5 W/POINTER ^ *	2 = FLEX/SW 90° 15" OAL	5 6 = 600	7	2 = FLAT SS	
3 = 4.0 W/O POINTER	3 = FLEX/SW 180° 19" OAL	6 0 = 1000	7	3 = 3/4" LOCATOR POLY ^ *	
4 = 4.0 W/POINTER	4 =	6 4 = 2000 ^ *	7	4 = 3/4" LOCATOR SS	
5 = 4.5 PROCESS	5 = STANDARD 5" GRIP ^	6 6 = 3000	7	5 = 5" RADIUS POLY	
6 = 4.5 W/POINTER	6 = 6" O.A. W/O GRIP	6 8 = 5000 <sup>1</sup>	7	6 = 5" RADIUS SS	
7 = CUSTOM	7 = UNDER 7" O.A.	7 2 = 10000 <sup>2</sup>	7	7 = THIN (LOW PROFILE)	
8 = DIGITAL	8 = SWIVEL ONLY	<sup>1</sup> MUST ADD SS LIVE PAD	7	8 = THIN (POLY)	
9 =	9 =	<sup>2</sup> SS LIVE PAD AND FLAT REAR PAD	7	9 = THIN (SS)	

^ = STOCK STANDARD GAUGE      \* = STOCK DELUXE GAUGE



**GCAP® ELECTRODE WELD SCHEDULE FOR GALVANIZED STEEL**

Metal Thickness	.020	.030	.035	.040	.050	.060	.078	.093	.125
G-CAP	244	254	254	254	255	255	266	266	266
Pressure	300	400	500	650	750	800	1000	1200	1400
Squeeze cycle	25	25	25	25	30	30	30	35	35
Up-Slope cycle					4	4	4	4	5
Upslope Kiloamps					2.0 to S.C.*	2.0 to S.C.*	2.0 to S.C.*	2.0 to S.C.*	2.0 to S.C.*
Weld cycle	6	8	9	10	7	8	10	12	10
Kiloamps	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.5	13.5
Cool cycle					1	1	1	1	1
Weld cycle					7	8	10	12	10
Kiloamps					10.5	11.0	11.5	12.5	13.5
Cool cycle									1
Weld cycle									10
Kiloamps									13.5
Hold cycle	3	4	4	5	5	10	10	15	20

\* S.C. – Starting Weld Current




**GCAP® LINEAR STEPPER**

<b>Total Weld Count</b>	500	1,000	3,000	5,000	7,500	10,000	12,000
<b>Total Amps Boost</b>	600	1000	3000	5000	6800	8400	9200
<b>Amps Boost Per Weld</b>	1.20		.88			.60	

The above schedules and stepper is only meant to be a guide and will require adjustments to fit the application.



**SPOT WELDING DATA**  
**OPTIMUM CONDITIONS**  
**SCHEDULES FOR SPOT WELDING LOW CARBON STEEL—SAE 1010**

Thick-ness of Thinnest Outside Piece (Inches)	Electrode Diameters and Shape*			Recommended Minimum Standard Electrode Size	Weld Force (Lbs.)	Weld Time (Cycles) (60 Cycles per Sec.)	Hold Time (Cycles) (Min.)	Welding Current (Amps.) (Approx.)	Weld Shear Strength (For Steels Having Ultimate Tensile Strength of 90,000 psi and below) Minimum Strength (Lbs/Weld)	Diameter of Fused Zone (Approx.) 	Minimum Weld Spacing 	Minimum Contacting Overlap 
	Flat Face		Radius Face									
	Maximum d (Inches)	Min. D (Inches)	Radius R (Inches)									
0.010	0.125	1/2	2	4RW 1MT	160	4	5	4,000	130	0.113	1/4	3/8
0.021	0.187	1/2	2	4RW 1MT	244	6	8	6,500	300	0.139	3/8	7/16
0.031	0.187	1/2	2	4RW 1MT	326	8	10	8,000	530	0.161	1/2	7/16
0.040	0.250	5/8	3	5RW 2MT	412	10	12	8,800	812	0.181	3/4	1/2
0.050	0.250	5/8	3	5RW 2MT	554	14	16	9,600	1,195	0.210	7/8	9/16
0.062	0.250	5/8	3	5RW 2MT	670	18	20	10,600	1,717	0.231	1	5/8
0.078	0.312	5/8	3	5RW 2MT	903	25	30	11,800	2,365	0.268	1-1/8	11/16
0.094	0.312	5/8	4	7RW 3MT	1,160	34	35	13,000	3,054	0.304	1-1/4	3/4
0.109	0.375	7/8	4	7RW 3MT	1,440	45	40	14,200	3,672	0.338	1-5/16	13/16
0.125	0.375	7/8	4	7RW 3MT	1,760	60	45	15,600	4,300	0.375	1-1/2	7/8
0.156	0.500	7/8	6	Male or Female Threaded	2,500	93	50	18,000	6,500	0.446	1-3/4	1
0.187	0.625	1	6	Male or Female Threaded	3,340	130	55	20,500	9,000	0.516	2	1-1/2
0.250	0.750	1-1/4	6	Male or Female Threaded	5,560	230	60	26,000	18,000	0.660	4	1-1/2


**PERMISSIBLE SCHEDULE VARIATIONS FOR SPOT WELDING LOW CARBON STEEL**  
Low Carbon Steel Spot Welding Data Chart—Single Impulse Welding

DATA COMMON TO ALL CLASSES OF SPOT WELDS				WELDING SET-UP FOR BEST QUALITY—CLASS A WELDS						WELDING SET-UP FOR MEDIUM QUALITY—CLASS B WELDS						WELDING SET-UP FOR GOOD QUALITY—CLASS C WELDS					
Thick-ness of Each of the Two Work Pieces (Inches)	Electrode Diam. & Shape		Min. Weld Spacing (Note 4) (Inches)	Min. Contacting Overlap (Note 6) (Inches)	Weld Time (Note 7) (Cycles)	Electrode Force (Pounds)	Welding Current (Amps.)	Diam. of Fused Zone (Inches)	Average Tensile Shear Strength ±14% (Pounds)	Weld Time (Note 7) (Cycles)	Electrode Force (Pounds)	Welding Current (Amps.)	Diam. of Fused Zone (Inches)	Average Tensile Shear Strength ±17% (Pounds)	Weld Time (Note 7) (Cycles)	Electrode Force (Pounds)	Welding Current (Amps.)	Diam. of Fused Zone (Inches)	Average Tensile Shear Strength ±20% (Pounds)		
	Min. D (Inches)	Max. d (Inches)																			
.010	1/2	1/8	1/4	3/8	4	200	4000	.13	235	5	130	3700	.12	200	15	65	3000	.11	160		
.021	1/2	3/16	3/8	7/16	6	300	6100	.17	530	10	200	5100	.16	460	22	100	3800	.14	390		
.031	1/2	3/16	1/2	7/16	8	400	8000	.21	980	15	275	6300	.20	850	29	135	4700	.18	790		
.040	5/8	1/4	3/4	1/2	10	500	9200	.23	1305	21	360	7500	.22	1230	38	180	5600	.21	1180		
.050	5/8	1/4	7/8	9/16	12	650	10300	.25	1820	24	410	8000	.23	1700	42	205	6100	.22	1600		
.062	5/8	1/4	1	5/8	14	800	11600	.27	2350	29	500	9000	.26	2150	48	250	6800	.25	2050		
.078	5/8	5/16	1-1/8	11/16	21	1100	13300	.31	3225	36	650	10400	.30	3025	58	325	7900	.28	2900		
.094	5/8	5/16	1-1/4	3/4	25	1300	14700	.34	4100	44	790	11400	.33	3900	66	390	8800	.31	3750		
.109	7/8	3/8	1-5/16	13/16	29	1600	16100	.37	5300	50	960	12200	.36	5050	72	480	9500	.35	4850		
.125	7/8	3/8	1-1/2	7/8	30	1800	17500	.40	6900	60	1140	12900	.39	6500	78	570	10000	.37	6150		

**NOTES:**

- Low Carbon Steel as hot rolled, pickled, and slightly oiled with an ultimate strength of 42,000 to 45,000 PSI Similar to SAE 1005—SAE 1010.
- Electrode Material is CMW® 3.
- Surface of steel is lightly oiled but free from grease, scale or dirt.
- Minimum weld spacing is that distance for which no increase in welding current is necessary to compensate for the shunted current effect in adjacent welds.

- Radius Face electrodes may be used:  
0.010 to 0.031 — 2" Radius  
0.031 to 0.078 — 3" Radius  
0.078 to 0.125 — 4" Radius



- Weld time is indicated in cycles of 60 cycle frequency.



- Tensile shear strength values are based on recommended test sample sizes:

Direction of Force	Thickness	Width	Length
	.000" to .029"	5/8"	3"
	.030" to .058"	1"	4"
	.059" to .115"	1-1/2"	5"
	.116" to .190"	2"	6"

- Tolerance for machining of electrode diameter "d" is ±.015" of specified dimension.
- Electrode force does not provide for force to press ill-fitting parts together.



**PROJECTION WELDING DATA**  
**DESIGN AND WELDING DATA FOR PROJECTION WELDING LOW CARBON STEELS**

Thickness of Thinnest Outside Piece Inches	PROJECTION DESIGN		ELECTRODE DIAMETERS (d=2 x Projection Diameter)		Electrode Force Pounds	Weld Time (Cycles) 60 Cycles per Sec.	Hold Time (Cycles) Minimum	Welding Current Amperes (Approx.)	Diameter of Fused Zone  Dw Inches	Minimum Shear Strength (Single Projection) (Only) (For Steels Having Strength of 100,000 psi and below) Pounds	Minimum Contacting Overlap  L Inches
	Base Diameter of Projection Dp Inches	Height of Projection H Inches	Minimum d Inches	Minimum D Inches							
0.010	0.055	0.015	0.125	1/2	50	3	3	2,800	0.112	150	1/8
0.012	0.055	0.015	0.125	1/2	80	3	3	3,100	0.112	200	1/8
0.014	0.055	0.015	0.125	1/2	100	3	3	3,400	0.112	250	1/8
0.016	0.067	0.017	0.187	1/2	115	4	4	3,600	0.112	285	5/32
0.021	0.067	0.017	0.187	1/2	150	6	6	4,000	0.140	380	5/32
0.025	0.081	0.020	0.187	1/2	200	6	8	4,500	0.140	525	3/16
0.031	0.094	0.022	0.187	1/2	300	8	8	5,100	0.169	740	7/32
0.034	0.094	0.022	0.187	1/2	350	10	10	5,400	0.169	900	7/32
0.044	0.119	0.028	0.250	5/8	480	13	14	6,500	0.169	1,080	9/32
0.050	0.119	0.028	0.250	5/8	580	16	16	7,100	0.225	1,500	9/32
0.062	0.156	0.035	0.312	7/8	750	21	20	8,400	0.225	2,100	3/8
0.070	0.156	0.035	0.312	7/8	900	24	24	9,200	0.281	2,550	3/8
0.078	0.187	0.041	0.375	7/8	1,050	26	30	10,500	0.281	2,950	7/16
0.094	0.218	0.048	0.500	7/8	1,300	32	30	11,800	0.281	3,700	1/2
0.109	0.250	0.054	0.500	7/8	1,650	38	36	13,300	0.338	4,500	5/8
0.125	0.281	0.060	0.500	7/8	1,800	45	40	15,000	0.338	5,200	11/16
0.140	0.312	0.066	0.625	1	2,300	60	45	15,700	0.437	6,000	3/4
0.156	0.343	0.072	0.625	1	2,800	80	50	17,250	0.500	7,500	13/16
0.171	0.375	0.078	0.750	1	3,300	105	50	18,600	0.562	8,500	7/8
0.187	0.406	0.085	0.750	1	3,800	125	50	20,000	0.562	10,000	15/16
0.203	0.437	0.091	0.875	1-1/4	4,500	145	55	21,500	0.625	12,000	1
0.250	0.531	0.110	1.000	1-1/4	6,600	230	60	26,000	0.687	15,000	1-1/4


**NOTES:**

- Type of Steel—Low Carbon SAE 1010—0.15% Carbon Maximum.
- Material free of scale, oxide, paint, dirt, etc.
- Size of projection determined by thickness of thinnest piece and projection should be on thickest piece.
- Data is based on thickness of thinnest sheet for two thicknesses only. Maximum ratio between two thicknesses = 3 to 1.
- See TABLE BELOW for design of punch and die for making projections.
- Contacting overlap does not include any radii from forming.
- Projection should be located in center of overlap.
- Tolerance for Projection Dimensions:

	Dimension	Thickness Up to 0.050"	Thickness Over 0.050"
Diameter "D" .....		±0.003"	±0.007"
Height "H" .....		±0.002"	±0.005"
9. Electrode Material:			
	CMW®100	ELKONITE®TC-10	ELKONITE®10W3

From American Welding Society "Recommended Practices for Resistance Welding"

**PUNCH AND DIE DESIGN FOR FORMING WELDING PROJECTIONS**

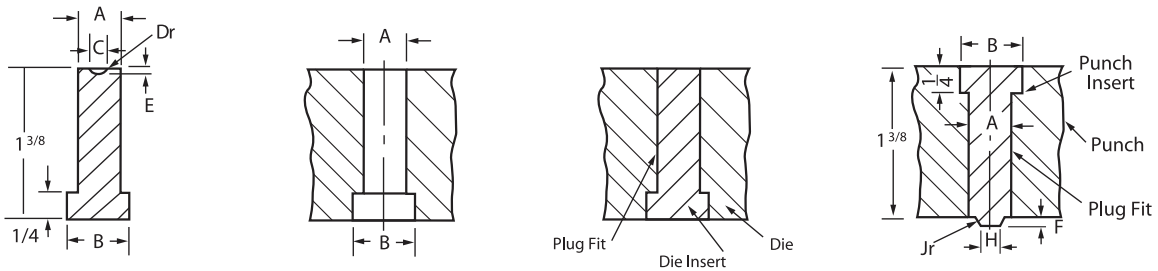

Mat Thickness	Pt. No.	A	B	±.002 C	Dr	±.001 E	±.001 F	±.001 H	Jr
0.010-0.015	1	3/8	9/16	.055	.033	.015	.015	.035	.005
0.016-0.021	2	3/8	9/16	.067	.042	.017	.020	.039	.005
.025	3	3/8	9/16	.081	.050	.020	.025	.044	.005
.031	4	3/8	9/16	.094	.062	.022	.030	.050	.005
.034	5	3/8	9/16	.094	.062	.022	.030	.050	.005
.044	6	3/8	9/16	.119	.078	.028	.035	.062	.005
.050	7	3/8	9/16	.119	.078	.028	.035	.062	.005
.062	8	3/8	9/16	.156	.105	.035	.043	.081	.005
.070	9	3/8	9/16	.156	.105	.035	.043	.081	.005
.078	10	3/8	9/16	.187	.128	.041	.055	.104	.010

Mat Thickness	Pt. No.	A	B	±.002 C	Dr	±.001 E	±.001 F	±.001 H	Jr
.094	11	1/2	11/16	.218	.148	.048	.065	.115	.010
.109	12	1/2	11/16	.250	.172	.054	.075	.137	1/64
.125	13	1/2	11/16	.281	.193	.060	.085	.154	1/64
.140	14	1/2	11/16	.312	.217	.066	.096	.172	1/64
.156	15	5/8	13/16	.343	.243	.072	.107	.191	1/64
.171	16	5/8	13/16	.375	.265	.078	.118	.210	1/64
.187	17	5/8	13/16	.406	.285	.085	.130	.229	1/64
.203	18	11/16	7/8	.437	.308	.091	.143	.240	.020
.250	19	13/16	1	.531	.375	.110	.175	.285	.025




Material: Tool Steel. Finish all over and harden to 65-68 Rockwell "C" scale. Note: All working surfaces of die unit must be polished.

From American Welding Society "Recommended Practices for Resistance Welding"







**SCHEDULE FOR SPOT WELDING STAINLESS STEEL**

THICKNESS "T" of THINNEST OUTSIDE PIECE (See Notes 1, 2, 3 and 4 Below)	ELECTRODE DIAMETER AND SHAPE (See Note 5)		ELECTRODE FORCE LB.	WELD TIME CYCLES (60 Per Sec.)	WELDING CURRENT (Approx.) AMPS		MINIMUM CONTACTING OVERLAP 	MINIMUM WELD SPACING (See Note 6 Below) 	DIAMETER OF FUZED ZONE 	MINIMUM SHEAR STRENGTH LB.		
	D, IN., Min.	d, IN., Max.			Tensile Strength Below 150000 Psi	Tensile Strength 150000 Psi and Higher				Ultimate Tensile Strength of Metal		
										70000 Up to 90000 Psi	90000 Up to 150000 Psi	150000 Psi and Higher
	INCHES									IN.	IN.	IN. Approx.
0.006	3/16	3/32	180	2	2000	2000	3/16	3/16	0.045	60	70	85
0.008	3/16	3/32	200	3	2000	2000	3/16	3/16	0.065	150	170	210
0.012	1/4	1/8	260	3	2100	2000	1/4	1/4	0.076	185	210	250
0.014	1/4	1/8	300	4	2500	2200	1/4	1/4	0.082	240	250	320
0.016	1/4	1/8	330	4	3000	2500	1/4	5/16	0.088	280	300	380
0.018	1/4	1/8	380	4	3500	2800	1/4	5/16	0.093	320	360	470
0.021	1/4	5/32	400	4	4000	3200	5/16	5/16	0.100	370	470	500
0.025	3/8	5/32	520	5	5000	4100	3/8	7/16	0.120	500	600	680
0.031	3/8	3/16	650	5	6000	4800	3/8	1/2	0.130	680	800	930
0.034	3/8	3/16	750	6	7000	5500	7/16	9/16	0.150	800	920	1100
0.040	3/8	3/16	900	6	7800	6300	7/16	5/8	0.160	1000	1270	1400
0.044	3/8	3/16	1000	8	8700	7000	7/16	11/16	0.180	1200	1450	1700
0.050	1/2	1/4	1200	8	9500	7500	1/2	3/4	0.190	1450	1700	2000
0.056	1/2	1/4	1350	10	10300	8300	9/16	7/8	0.210	1700	2000	2450
0.062	1/2	1/4	1500	10	11000	9000	5/8	1	0.220	1950	2400	2900
0.070	5/8	1/4	1700	12	12300	10000	5/8	1-1/8	0.250	2400	2800	3550
0.078	5/8	5/16	1900	14	14000	11000	11/16	1-1/4	0.275	2700	3400	4000
0.094	5/8	5/16	2400	16	15700	12700	3/4	1-1/2	0.290	3550	4200	5300
0.109	3/4	3/8	2800	18	17700	14000	13/16	1-1/2	0.290	4200	5000	6400
0.125	3/4	3/8	3300	20	18000	15500	7/8	2	0.300	5000	6000	7600

**NOTES:**

- Types of Steel—301, 302, 303, 304, 308, 309, 310, 316, 317, 321, 347 & 349
- Material should be free from scale, oxides, paint, grease and oil.
- Welding conditions determined by thickness of thinnest outside piece "T"
- Data for total thickness of pile-up not exceeding 4 "T". Maximum ratio between two thicknesses 3 to 1.
- Electrode Material, CMW® 3, CMW® 100, or ELKONITE® 10W3
- Minimum weld spacing is that spacing for two pieces for which no special precautions need be taken to compensate for shunted current effect of adjacent welds. For three pieces increase spacing 30 per cent.

**SCHEDULE FOR SEAM WELDING STAINLESS STEEL**

THICKNESS "T" OF THINNEST OUTSIDE PIECE (See Notes 1, 2, 3 and 4 Below)	ELECTRODE WIDTH AND SHAPE (See Note 5 Below) 	ELECTRODE FORCE LB.	ON TIME CYCLES (60 Per Sec.)	OFF TIME FOR MAXIMUM SPEED (Pressure-Tight) CYCLES		MAXIMUM WELD SPEED		WELDS PER INCH		WELDING CURRENT (Approx.) AMPS.	MINIMUM CONTACTING OVERLAP (See Note 6 Below) 
				2 "T"	4 "T"	2 "T"	4 "T"	2 "T"	4 "T"		
				IN. PER MINUTE		WELDS PER INCH					
				INCHES	W, IN., Min.						
0.006	3/16	300	2	1	1	60	67	20	18	4000	1/4
0.008	3/16	350	2	2	2	67	56	18	16	4600	1/4
0.010	3/16	400	3	2	2	45	51	16	14	5000	1/4
0.012	1/4	450	3	2	2	48	55	15	13	5600	5/16
0.014	1/4	500	3	2	3	51	46	14	13	6200	5/16
0.016	1/4	600	3	2	3	51	50	14	12	6700	5/16
0.018	1/4	650	3	2	3	55	50	13	12	7300	5/16
0.021	1/4	700	3	2	3	55	55	13	11	7900	3/8
0.025	3/8	850	3	3	4	50	47	12	11	9200	7/16
0.031	3/8	1000	3	3	4	50	47	12	11	10600	7/16
0.040	3/8	1300	3	4	5	47	45	11	10	13000	1/2
0.050	1/2	1600	4	4	5	45	44	10	9	14200	5/8
0.062	1/2	1850	4	5	7	40	41	10	8	15100	5/8
0.070	5/8	2150	4	5	7	44	41	9	8	15900	11/16
0.078	5/8	2300	4	6	7	40	41	9	8	16500	11/16
0.094	5/8	2550	5	6	7	36	38	9	8	16600	3/4
0.109	3/4	2950	5	7	9	38	37	8	7	16800	13/16
0.125	3/4	3300	6	6	8	38	37	8	7	17000	7/8

**NOTES:**

- Types of Steel—301, 302, 303, 304, 308, 309, 310, 316, 317, 321, 347 & 349.
- Material should be free from scale, oxides, paint, grease and oil.
- Welding conditions determined by thickness of thinnest outside piece "T"
- Data for total thickness of pile-up not exceeding 4 "T". Maximum ratio between two thicknesses 3 to 1.
- Electrode material, CMW® 100
- For large assemblies minimum contacting overlap indicated should be increased 30 per cent.



**Spot welding galvanized low-carbon steel**

Material Thickness	Electrode Diameter And Shape			Net Electrode Force	Welding Current (Approx.)	Weld Time	Weld Nugget Size	Minimum Tension-Shear Strength	Minimum Weld Spacing	Minimum Contacting Overlap
	D	d	Oc							
notes 1, 2, & 3	note 4									
Inches	In.	In.	Deg.	Lb.	Amps.	Cycles	In.	Lb.	Inches	Inches
0.022	5/8	3/16	120	300	13000	8	0.15	550	5/8	5/8
0.030	5/8	3/16	120	400	13000	10	0.16	1000	5/8	5/8
0.036	5/8	1/4	120	500	13500	12	0.19	1180	3/4	5/8
0.039	5/8	1/4	120	650	14000	13	0.21	1400	3/4	5/8
0.052	5/8	1/4	120	725	14500	18	0.22	1700	7/8	11/16
0.063	3/4	1/4	120	850	15500	22	0.24	2500	1-1/8	3/4
0.078	3/4	5/16	120	1200	19000	24	0.28	3200	1-1/4	7/8
0.093	3/4	3/8	120	1400	21000	30	0.34	4200	1-1/2	1
0.108	7/8	3/8	120	1750	20000	37	0.40	5900	1-3/4	1-1/8
0.123	7/8	3/8	120	2000	20000	42	0.48	7200	2	1-1/8

**NOTES:**

1. Material must be free from dirt, grease, paint etc. prior to welding, but may have light oil.
2. Two equal metal thicknesses of each gage.
3. Commercial coating weight is 1.25 oz. per square foot.
4. Electrode Material-RWMA Group A, Class 2. CMW® 3.
5. Water Cooling: 2 gallons per minute.

Projections should be larger in diameter for galvanized than for uncoated material.

**Projection welding galvanized low-carbon steel**

Material Thickness	Electrode Diameter And Shape			Net Electrode Force	Welding Current (Approx.)	Weld Time	Weld Nugget Size	Minimum Tension-Shear Strength	Projection Size	
	D	d							Diameter	Height
notes 1, 2, & 3	note 4							(For Single Projections Only)		
Inches	In.	In.		Lb.	Amps.	Cycles	In.	Lb.	In.	In.
0.039	5/8	3/8		250	10000	15	0.15	925	0.187	0.041
0.063	5/8	7/16		400	11500	20	0.25	2050	0.218	0.048
0.078	3/4	1/2		550	16000	25	0.25	2700	0.250	0.054
0.093	3/4	1/2		750	16000	30	0.30	4300	0.250	0.054
0.108	7/8	1/2		950	22000	33	0.31	4900	0.250	0.054

**NOTES:**

1. Material must be free from dirt, grease, paint etc. prior to welding, but may have light oil.
2. Two equal metal thicknesses of each gage.
3. Commercial coating weight is 1.25 oz. per square foot.
4. Electrode Material-RWMA Group A, Class 2. CMW® 3.
5. Pressure-tight joints require stripping the zinc coating prior to welding.
6. Nominal electrode diameter ranges between 8 to 10 inches.

From American Welding Society "Recommended Practices for Resistance Welding."

**Seam welding galvanized low-carbon steel**

Material Thickness	Electrode Width And Shape		Net Electrode Force	Welding Current (Approx.)	Weld Time		Welding Speed	Welds Per Inch	Minimum Contacting Overlap
	W	E			Heat Time	Cool Time			
notes 1, 2, & 3	note 4								
Inches	In.	In.	Lb.	Amps.	Cycles	Cycles	In./Min.	W/In.	Inches
0.015	3/8	1/4	900	15000	2	2	120	7.5	3/8
0.036	1/2	1/4	1100	18000	4	2	60	10.0	1/2
0.039	1/2	1/4	1200	19000	4	3	60	9.0	1/2
0.052	1/2	1/4	1350	20000	5	1	90	7.0	9/16
0.063	1/2	5/16	1500	19800	8	2	54	7.0	5/8
0.078	5/8	5/16	1850	23000	10	7	30	7.0	11/16





This Chart shows graphically the importance of Electrode maintenance. This is not only important from the quality of the weld, which is of first importance, also extra load added to the welding machine and equipment. Read the data on the chart, you can then draw your own conclusions.


**YOU CAN'T AFFORD TO NEGLECT YOUR ELECTRODES!**

Keep your Electrodes dressed for maximum production and quality welds.

**A TIP DRESSER WILL PAY DIVIDENDS!**

We can supply you with hand operated Tip Dressers or Pneumatic Power Driven Dressers. Design or type will depend on your production requirements. Pages 66 & 67.

**RESISTANCE WELDING**

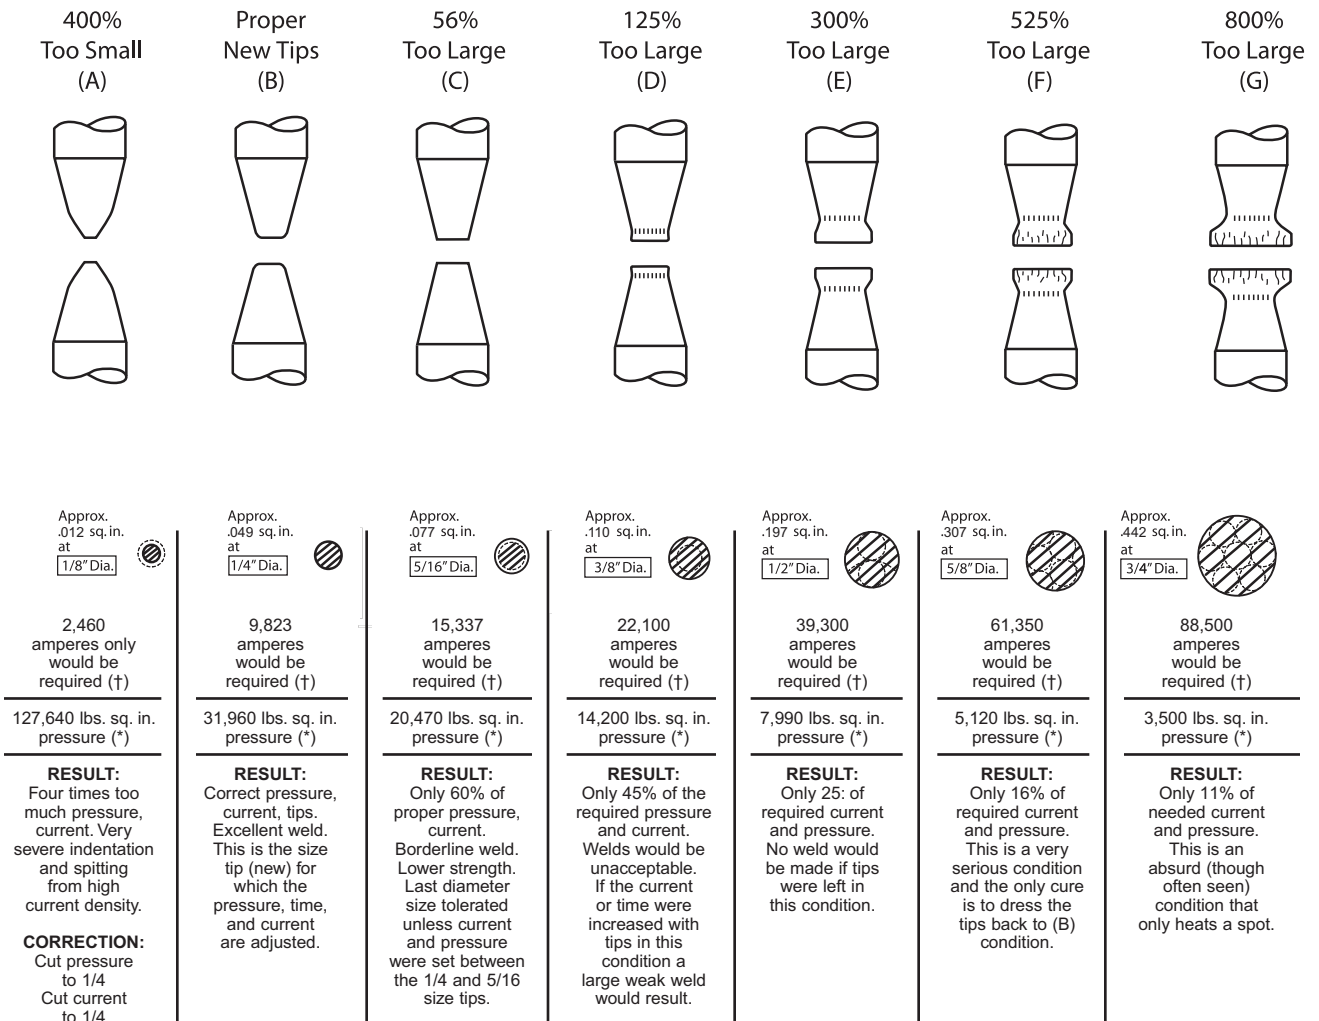

(†) Current density required for this gage to be 200,000 amps per sq. in. Setting is 9,900 amps for condition (B)

(\*) Five inch diameter air cylinder A 80 lbs. air pressure—1570 lbs. on ram.





Location \_\_\_\_\_

Contact \_\_\_\_\_ Phone \_\_\_\_\_ Fax \_\_\_\_\_ Date \_\_\_\_\_

Equipment --- Plant/Line # _____							
TYPE	Robot	Fixed Auto	Press	Hand	Online	Offline	Other (Specify)
GUN STYLE	C Gun	Pinch	Scissor	Other (Specify)	Comment		
CONDITION	New	Old	Good	Poor			
STEPPER CAPABILITY	Number of Steps	Linear	Non-linear	None			
UP-SLOPE CAPABILITY	Yes	No					
PULSE CAPABILITY	Yes	No					
NUMBER OF	Schedules per SCR	Transformers per SCR	Guns per Transformer	Transformer Taps	Transformer KVA		

Workpieces (Materials)							
POSITION	THICKNESS	CHECK ONE (per workpiece)					
		Bare Steel	Aluminized	Zn Electroplate	Galvanneal	Hot Dipped Galvanized	Organic
Outside							
Inside							
Inside							
Outside							
FIT-UP	Good	Poor	Comments				

ELECTRODES							
NOSE STYLE	A (Pointed)	B (Dome)	C (Flat)	D (Offset)	E (Truncated)	F (Radius)	Other (Specify)
	MATERIAL	Class 1	Class 2	Class 20 (DSC)	Other (Specify)		
TAPER STYLE	Female	Male			Comments		
ALIGNMENT	Good	Poor	Requires Backup				



## DO'S AND DON'TS FOR RESISTANCE WELDING ELECTRODES

DO'S	DON'TS
<ol style="list-style-type: none"><li>1. Use the proper electrode material for the job you are doing.</li><li>2. Use standard electrodes wherever possible.</li><li>3. Use the most suitable tip diameter for the thickness of stock being welded.</li><li>4. Use open sight drains to observe more readily the water flow through the holders.</li><li>5. Connect the water inlet hose to the proper holder inlet so that the water flows through the center cooling tube first.</li><li>6. Internally cool the spot welding tips with cool water flowing at a rate of at least 1/2 gallon per minute through each tip.</li><li>7. Be sure the internal water cooling tube of the holder projects into the tip water hole to within 1/4" of the tip hole bottom.</li><li>8. Adjust the internal water cooling tube of the holder to the proper height when changing to a different length tip.</li><li>9. Be sure top of adjustable water cooling tube in holders is cut at an angle so as to avoid jamming tip down and shutting water off.</li><li>10. Place a thin film of cup grease on the tip taper prior to inserting in the holder, to make it easier to remove.</li><li>11. Use ejector type holders for easy removal of tips and to avoid damage to tip tapers.</li><li>12. Keep the tip taper and holder taper clean, smooth and free of foreign deposits.</li><li>13. Dress spot welding electrodes frequently to maintain the quality of the welds.</li><li>14. Dress electrodes in a lathe to their original contour whenever possible.</li><li>15. Use a rawhide or rubber mallet for striking holder or tips in aligning operations.</li><li>16. Provide flood cooling on both sides of the seam welding wheel.</li><li>17. Use properly designed knurling wheels to maintain proper seam welding wheel shape.</li></ol>	<ol style="list-style-type: none"><li>1. Never use unidentified electrodes or electrode materials.</li><li>2. Avoid special, offset or irregular tips when the job can be done with a standard straight tip.</li><li>3. Don't use small tips on heavy gauge welding jobs or large tips on small work.</li><li>4. Don't forget to turn on the cooling water full force before starting to weld.</li><li>5. Never use water hose that will not fit the holder water connection nipples snugly.</li><li>6. Do not allow water connections to become leaky, clogged or broken.</li><li>7. Avoid using holders with leaking or deformed tapers.</li><li>8. Never use electrode holders that do not have an adjustable internal water cooling tube.</li><li>9. Do not permit adjustable water tube to be "frozen" by accumulation of deposits. A few drops of oil periodically will keep the tube free.</li><li>10. Do not allow electrodes to remain idle in tapered holder seats for extended periods.</li><li>11. Don't use pipe wrenches or similar tools in removing electrodes.</li><li>12. Avoid using white lead or similar compounds to seal a leaking taper.</li><li>13. Never permit a spot welding tip to mushroom enough to make dressing difficult.</li><li>14. Never dress electrodes with a coarse file.</li><li>15. Don't pound on the holder or tip with a steel hammer in aligning the welder arms.</li><li>16. Avoid the use of seam welder wheels too thin to stand the heat or pressure of your job.</li><li>17. Do not permit seam welding wheel to run off the corners of the work being welded.</li></ol>



**SPOTWELD, INC.**  
Excellence in Resistance Welding

