


# Water Recirculators

## PROCOOL PC2 V/G COOLING SYSTEM

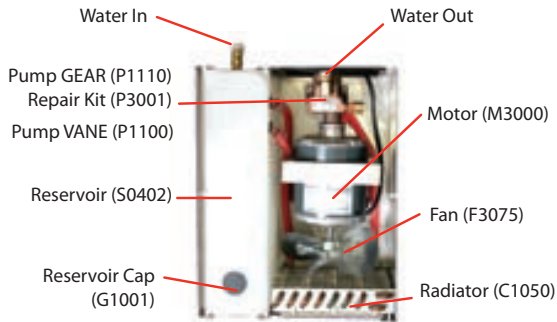

### SPECIFICATIONS:

- Factory set at 50 psi adjustable to 80 psi
- 3 gallon reservoir
- 115 or 230vac / 1 ph - 50 / 60 Hz
- 5.6 / 2.8 amp : 60 Hz
- 12,000 BTU
- Dimensions: 18"L x 14"W x 9"H
- Net weight: 37 lbs / 17 kg
- Foam packed for UPS shipment

The ProCool PC2 V/G Cooling System is designed for:

Equipment	UP TO
M.I.G. guns	500 amps
T.I.G. torches	500 amps
RESISTANCE Welders	60 KVA

### PCIIG: Rotary GEAR Pump

- 1.8 gpm at 50 psi
- Built in by-pass to tank
- Rebuildable Pump (Repair Kit Product No. P3001)

### PCIIV: Rotary VANE Pump

- 1.7 gpm at 50 psi

*12,000 BTU / HR @ 75 Degrees Differential  
between ambient and return water temperature.*

- Plastic water tank eliminates coolant contamination due to electrolysis or chemical reactions.
- All units are plumbed with copper tubing and reinforced hose.
- New extended life pump features a direct drive power system reducing maintenance and vibration.
- No external plumbing is required because of closed loop water system.
- Self priming pump
- Easy change pump
- Strong rigid construction designed to support power unit.
- Compact design

**DYNAFLUX**  
QUALITY PRODUCTS

241 Brown Farm Road • Cartersville, GA 30120 • USA • [www.dynaflux.com](http://www.dynaflux.com)